

Spring plungers with slot and stainless steel ball, plastic

Item description/product images



Description

Material:

Sleeve plastic.
Ball 1.4034 stainless steel.
Spring 1.4310.



Version:

Ball, hardened.

Note:

Spring plungers are used for indexing and positioning. They can also be used as ejectors.

Drawings

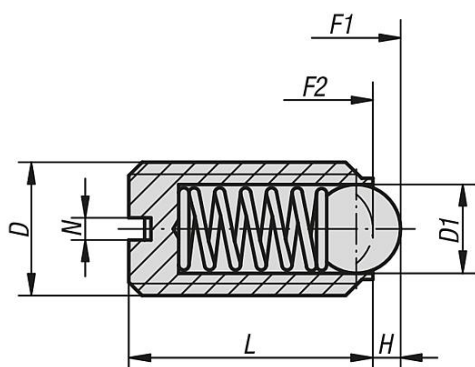

$$\begin{aligned} \alpha &= 60^\circ, F' = 1,732 \times F \\ \alpha &= 90^\circ, F' = F \\ \alpha &= 120^\circ, F' = 0,577 \times F \end{aligned}$$

Overview of items

Spring plungers with slot and stainless steel ball, plastic

Order No.	D	D1	H	L	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0312.06	M6	3,5	1	14	1	9	13
K0312.08	M8	5	1,5	16	1,2	15	30
K0312.10	M10	6	2	19	1,6	20	40