


Locking pins

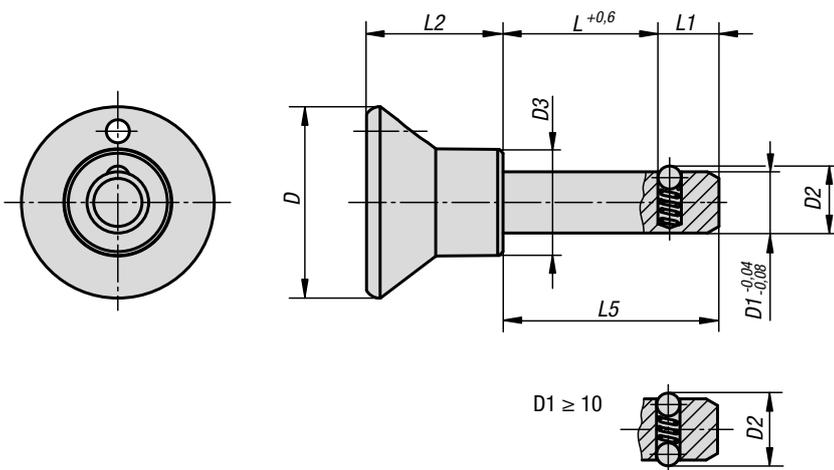

Material:

Grip thermoplastic.
Steel parts stainless steel.

Version:

Grip black.
Stainless steel bright.

Sample order:

K0365.2508020
(include length L e.g. 020 for L = 20 mm)


Note:

Locking pins are used for quick and easy fixating and joining of parts and workpieces.

Shearing force double-shear (F) = S · τ aB max.

Accessories:


- Bushes for ball lock pins K0724
- Safety spiral cable K0367
- Retaining cable with loop K0367
- Key ring K0367

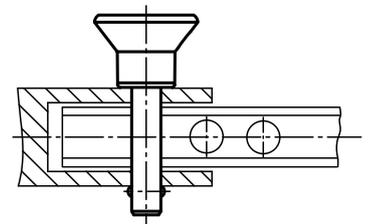

KIPP Locking pins

| Order No. | D | D1 | D2 | D3 | L | L1 | L2 | L5 | Receiving hole H11 | Shearing force double shear max.kN |
|---------------|----|----|------|----|----------------------|----|------|----------------------|--------------------|------------------------------------|
| K0365.2506*** | 25 | 6 | 6,5 | 14 | 10/15/20/25/30/40/50 | 7 | 17,7 | 17/22/27/32/37/47/57 | 6 | 22 |
| K0365.2508*** | 25 | 8 | 8,75 | 14 | 15/20/25/30/40/50 | 8 | 17,7 | 23/28/33/38/48/58 | 8 | 38 |
| K0365.3310*** | 33 | 10 | 12 | 19 | 15/20/25/30/40/50 | 9 | 24 | 24/29/34/39/49/59 | 10 | 60 |
| K0365.3312*** | 33 | 12 | 14,5 | 19 | 20/30/40/50 | 10 | 24 | 30/40/50/60 | 12 | 86 |

Locking pins with key ring

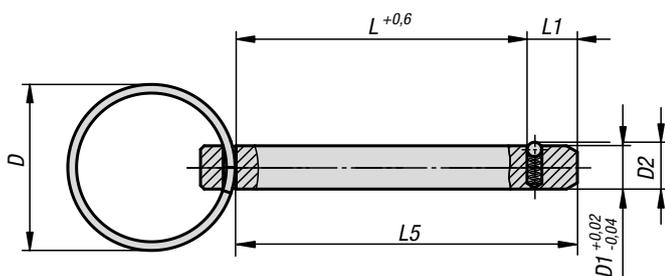

Material:

Pin steel.
Key ring stainless steel.

Version:

Pins electro zinc-plated.
Key ring bright.

Sample order:

K0365.102306020

Note:

Locking pins are used for quick and easy fixating and joining of parts and workpieces.

Shearing force double shear (F) = S · τ aB max.

The locking pins with key ring represent a cost-effective alternative to other locking pins.

KIPP Locking pins with key ring

| Order No. | D | D1 | D2 | L | L1 | L5 | Shearing force double shear max.kN |
|-----------------|----|----|-----|----|----|----|------------------------------------|
| K0365.102306015 | 23 | 6 | 6,5 | 15 | 7 | 22 | 22 |
| K0365.102306020 | 23 | 6 | 6,5 | 20 | 7 | 27 | 22 |
| K0365.102306030 | 23 | 6 | 6,5 | 30 | 7 | 37 | 22 |
| K0365.102306040 | 23 | 6 | 6,5 | 40 | 7 | 47 | 22 |
| K0365.102808030 | 28 | 8 | 8,8 | 30 | 8 | 38 | 38 |
| K0365.102808040 | 28 | 8 | 8,8 | 40 | 8 | 48 | 38 |
| K0365.102808050 | 28 | 8 | 8,8 | 50 | 8 | 58 | 38 |