


Levelling feet threaded spindles

steel or stainless steel

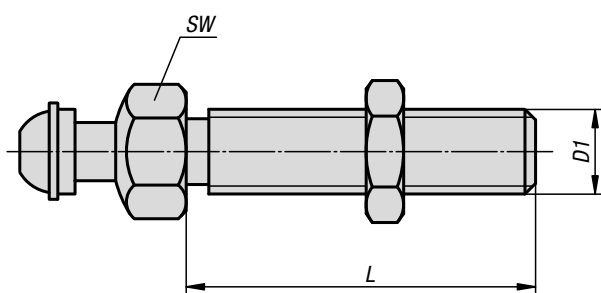

Material:

Steel or 1.4305 stainless steel

Version:

Steel trivalent blue passivated.
Stainless steel, bright.

Sample order:

K0427.120661

K0427.120661 and K0423.1060 **assembled**

Note for ordering:

If the threaded spindle and the levelling foot plate are to be supplied assembled, please add the suffix **“assembled”** to the order number for the spindle and plate. (e.g. K0427.120661 and K0423.1060 **assembled**.)

Note:

Levelling feet consist of a plate and a threaded spindle. Any plate can be combined with any threaded spindle. The height of the complete levelling foot is calculated from the length of the threaded spindle + 30 mm. (Total height of levelling foot = L + 30 mm)

KIPP Levelling feet threaded spindles steel or stainless steel

Order No. steel	Order No. stainless steel	D1	L	SW	Load rating max. kN
K0427.120661	K0427.120662	M12	66	22	7,7
K0427.121001	K0427.121002	M12	100	22	7,7
K0427.121251	K0427.121252	M12	125	22	7,7
K0427.121501	K0427.121502	M12	150	22	7,7
K0427.160661	K0427.160662	M16	66	22	14,5
K0427.161001	K0427.161002	M16	100	22	14,5
K0427.161251	K0427.161252	M16	125	22	14,5
K0427.161501	K0427.161502	M16	150	22	14,5
K0427.162001	K0427.162002	M16	200	22	14,5
K0427.201001	K0427.201002	M20	100	22	24,3
K0427.201251	K0427.201252	M20	125	22	24,3
K0427.201501	K0427.201502	M20	150	22	24,3
K0427.202001	K0427.202002	M20	200	22	24,3