


# Rubber buffers

type DS suction foot

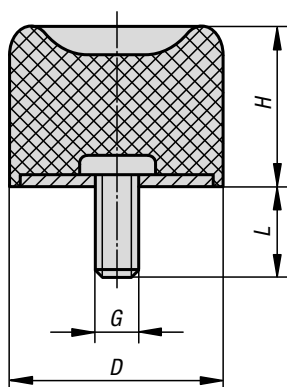

**Material:**

Metal parts, steel, grade 5.6.  
Elastomer natural rubber, medium hardness, Shore 57A.

**Version:**

Steel electro zinc-plated.

**Sample order:**

K0572.01501457

**Note:**

Rubber buffers are used, among other things for mounting aggregates and as elastic buffers to limit the travel of moving masses.

**Temperature range:**

-30 °C to +80 °C

**On request:**

Other Shore grades.

## KIPP Rubber buffers type DS suction foot

Order No.	D	H	G	L	Spring stiffness N/mm	Load N
K0572.01501457	15	14	M4	13	50	100
K0572.02501857	25	18,5	M6	18	95	285
K0572.03002857	30	28,5	M8	23	97	340
K0572.04002857	40	28	M8	23	120	480
K0572.05002857	50	28	M10	28	220	990
K0572.07003057	70	30	M10	28	360	2160
K0572.07503757	75	37	M12	37	390	3510
K0572.10005057	100	50	M16	42	540	8100