
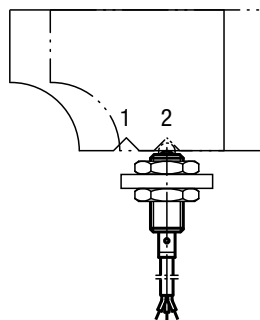

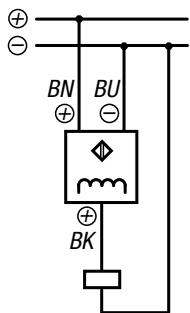


Spring plungers

with status sensor

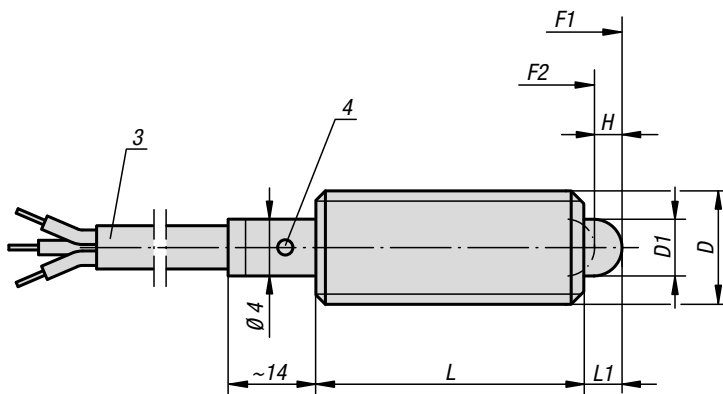

Material:

Sleeve, thrust pin and spring steel.
Inductive proximity switch.

Version:

Black oxidised.
Thrust pin hardened.

Sample order:

K0656.5081

Note:

An electrical control signal can be sent via the built-in end switch.

Voltage: $U = 10 - 30 \text{ V DC}$

Current: $I_{\text{max.}} = 200 \text{ mA}$

Temperature range: $-25 \text{ °C} - +70 \text{ °C}$

Protection class: IP 67

Safety:

Spring plungers with status sensor are not suitable for personal protection.

Drawing reference:

3) cable $\varnothing 3.5 \text{ mm}$; length ca. 2 m

4) LED-indicator

BN = brown

BK = black

BU = blue

Example of position feedback:

Pos. 1: slide engaged

Pos. 2: slide disengaged

KIPP Spring plungers with status sensor

Order No.	Version 2	D	D1	H	L	L1	Switching contact from stroke H1	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0656.5061	normally closed	M6	2,7	2	27	3	1,2 - 1,6	7	20
K0656.5081	normally closed	M8	4	2	29	3	1,2 - 1,8	15	30
K0656.5101	normally closed	M10	4,5	3	36	4	2,2 - 2,8	26	44
K0656.5062	normally open	M6	2,7	2	27	3	1,2 - 1,6	7	20
K0656.5082	normally open	M8	4	2	29	3	1,2 - 1,8	15	30
K0656.5102	normally open	M10	4,5	3	36	4	2,2 - 2,8	26	44