


Parallel keys

DIN 6885 A

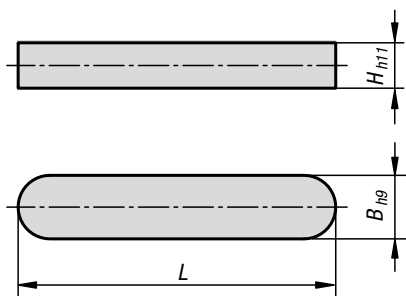

Material:

Steel 1.1192 or stainless steel 1.4571.

Version:


Bright.

Sample order:

K0696.04X12 (include length L)



Application example:



KIPP Parallel keys DIN 6885 A

Order No.	Main material	B	H	L = length
K0696.03X	steel	3	3	8/10/12/14/16/18/20/22/25/28
K0696.04X	steel	4	4	8/10/12/14/16/18/20/22/25/28
K0696.05X	steel	5	5	12/14/16/18/20/22/25/28/32/36/40
K0696.06X	steel	6	6	12/14/16/18/20/22/25/28/32/36/40/45
K0696.08X	steel	8	7	14/16/18/20/22/25/28/32/36/40/45/50/70
K0696.10X	steel	10	8	22/25/28/32/36/40/45/50/56/70/80
K0696.12X	steel	12	8	25/28/32/36/40/45/50/56/70/80
K0696.14X	steel	14	9	25/28/32/36/40/45/50/56/70/80
K0696.16X	steel	16	10	50/56/63/70/80/90/100
K0696.103X	stainless steel	3	3	10/12/16/20
K0696.104X	stainless steel	4	4	10/12/14/16/18/20/22
K0696.105X	stainless steel	5	5	12/14/16/18/20/22/25/28/36/40
K0696.106X	stainless steel	6	6	12/14/16/18/20/22/25/28/32/36/40
K0696.108X	stainless steel	8	7	16/18/20/22/25/28/32/36/40/45/50/70
K0696.110X	stainless steel	10	8	22/25/28/32/36/40/45/50/56/70/80
K0696.112X	stainless steel	12	8	28/32/36/40/45/50/56/70/80
K0696.114X	stainless steel	14	9	32/40/45/50/56/70/80
K0696.116X	stainless steel	16	10	50/63/70/80/90/100