


Tubular bubble levels

with frame to screw on

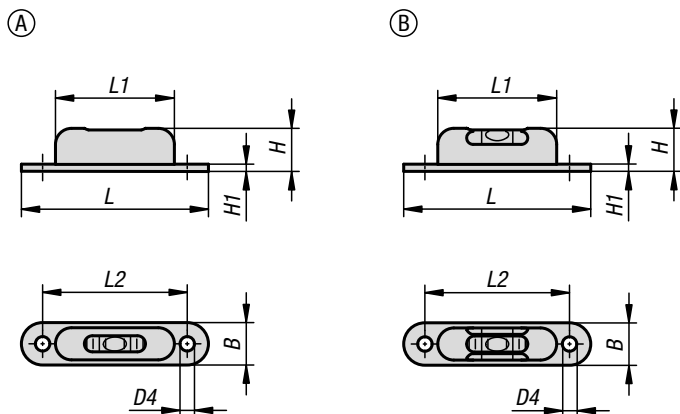

Material:

Frame brass.
Tubular bubble vial glass.

Version:

Nickel-plated and high-gloss polished. Form B: black anodised.

Sample order:

K1158.1571350

Note:

Bubble levels are used as a type of zero indicator instrument for checking horizontal inclination in e.g. spirit levels, inclinometers, metrology instruments and machine constructions.

The tubular levels can be fastened using the two holes.

- Form A: one sight window
- Form B: three sight windows
- Sensitivity in angular minutes for 2 mm bubble travel
- Green filling

Temperature range:

-35 °C up to +55 °C.

KIPP Tubular levels with frame to screw down

| Order No. | Form | B | D4 | H | H1 | L | L1 | L2 | Sensitivity |
|---------------|------|------|-----|----|----|----|----|----|-------------|
| K1158.1571350 | A | 12,3 | 4,5 | 13 | 1 | 57 | 37 | 45 | 50' |
| K1158.2571305 | B | 12,3 | 4,5 | 13 | 1 | 57 | 37 | 45 | 5' |