


Ball lock pins

stainless steel, with headend lock

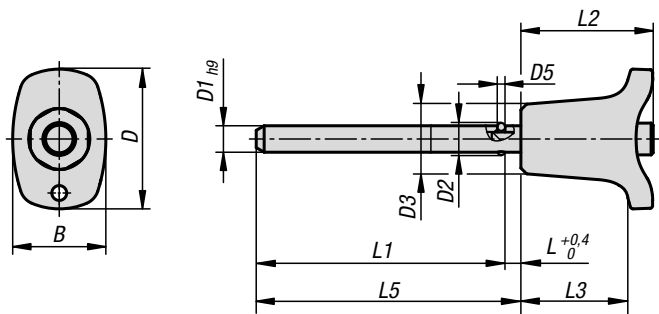

Material:

Grip thermoplastic.

Push button 1.4305 stainless steel.

Pin 1.4305 stainless steel.

Balls 1.4125 stainless steel.

Spring 1.4310 stainless steel wire.

Version:

Grip black grey.

Stainless steel bright.

Sample order:

K1415.002605050

(include length L5, e.g. 050 for L5 = 50 mm)

Note:

Ball lock pins are used for easy fastening or joining of components.

The two balls are disengaged by pressing the push button and the pin can be slipped into holes in the workpieces. When the push button is released, the balls lock the connection securely.

Shear force double shear (F) = S · τ aB max.

The values given for the shear force are the theoretical breaking load.

These are non-binding reference values without consideration of safety factors and exclude any liability. The values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been calculated in accordance with DIN 50141. Each user must determine individually whether the ball lock pin is suitable for the respective application.

Different materials in which the ball lock pins are used, weather conditions and wear can influence the determined values.

Advantages:

Wide connections possible.

The pin length does not need to be coordinated with the component width.

On request:

Other pin lengths.

Accessories:

Adapter bushes for ball lock pins with head lock K1416.

Safety spiral cable K0367

Retaining cable with eyelet K0367

Key ring K0367

Ball lock pins

stainless steel, with headend lock




KIPP Ball lock pins stainless steel, with head-end lock

Order No.	B	D	D1	D2	D3	D5	L	L1	L2	L3	L5	Receiving hole H11	Shearing force double shear max.kN
K1415.002605***	17,6	26,4	5	5,5	13,2	1,5	3	47/97/147	25	20,2	50/100/150	5	10
K1415.002606***	17,6	26,4	6	6,85	13,2	2	3	47/97/147	25	20,2	50/100/150	6	14
K1415.003308***	23	33,2	8	9,5	17,3	3	3,5	96,5/146,5/196,5	33	26,1	100/150/200	8	26
K1415.003310***	23	33,2	10	12	17,3	4	3,5	96,5/146,5/196,5	33	26,1	100/150/200	10	40
K1415.004612***	33	45,9	12	14,5	26,3	4,5	3,5	146,5/196,5/246,5	39,5	31,3	150/200/250	12	57
K1415.004616***	33	45,9	16	19	26,3	6,5	4	146/196/246	39,5	31,3	150/200/250	16	100

Ball lock pins with T-grip

stainless steel, with head-end lock

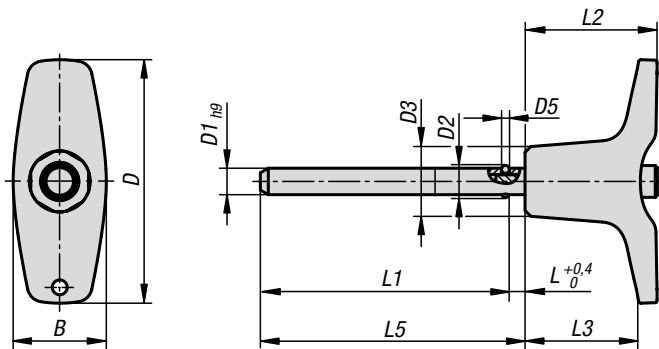

Material:

Grip thermoplastic.
Push button 1.4305 stainless steel.
Pin 1.4305 stainless steel.
Balls 1.4125 stainless steel.
Spring 1.4310 stainless steel wire.

Version:

Grip black grey.
Stainless steel bright.

Sample order:

K1415.204605050
(include length L e.g. 050 for L = 50 mm)

Note:

Ball lock pins are used for easy fastening or joining of components.

The two balls are disengaged by pressing the push button and the pin can be slipped into holes in the workpieces. When the push button is released, the balls lock the connection securely.

Shear force double shear (F) = S · τ aB max.

The values given for the shear force are the theoretical breaking load.

These are non-binding reference values without consideration of safety factors and exclude any liability. The values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been calculated in accordance with DIN 50141. Each user must determine individually whether the ball lock pin is suitable for the respective application.

Different materials in which the ball lock pins are used, weather conditions and wear can influence the determined values.

Advantages:

Wide connections possible.

The pin length does not need to be coordinated with the component width.

On request:

Other pin lengths.

Accessories:

Adapter bushes for ball lock pins with head lock K1416.

Safety spiral cable K0367

Retaining cable with eyelet K0367

Key ring K0367

Ball lock pins with T-grip

stainless steel, with head-end lock




KIPP Ball lock pins with T-grip stainless steel, with head-end lock

Order No.	B	D	D1	D2	D3	D5	L	L1	L2	L3	L5	Receiver hole H11	Shearing force double shear max.kN
K1415.204605***	17,6	46	5	5,5	13,2	1,5	3	47/97/147	25	19,4	50/100/150	5	10
K1415.204606***	17,6	46	6	6,85	13,2	2	3	47/97/147	25	19,4	50/100/150	6	14
K1415.206308***	23	62,9	8	9,5	17,3	3	3,5	96,5/146,5/196,5	33	24,4	100/150/200	8	26
K1415.206310***	23	62,9	10	12	17,3	4	3,5	96,5/146,5/196,5	33	24,4	100/150/200	10	40
K1415.208212***	33	81,8	12	14,5	26,3	4,5	3,5	146,5/196,5/246,5	39,5	28,8	150/200/250	12	57
K1415.208216***	33	81,8	16	19	26,3	6,5	4	146/196/246	39,5	28,8	150/200/250	16	100

Ball lock pins with L-grip

stainless steel, with head-end lock

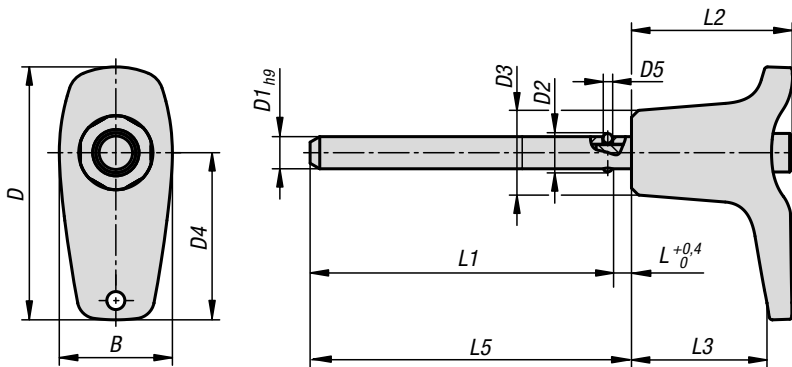

Material:

Grip thermoplastic.
 Push button 1.4305 stainless steel.
 Pin 1.4305 stainless steel.
 Balls 1.4125 stainless steel.
 Spring 1.4310 stainless steel wire.

Version:

Grip black grey.
 Stainless steel bright.

Sample order:

K1415.102605050
 (include length L e.g. 050 for L = 50 mm)

Note:

Ball lock pins are used for easy fastening or joining of components.

The two balls are disengaged by pressing the push button and the pin can be slipped into holes in the workpieces. When the push button is released, the balls lock the connection securely.

Shear force double shear (F) = $S \cdot \tau$ aB max.

The values given for the shear force are the theoretical breaking load.

These are non-binding reference values without consideration of safety factors and exclude any liability. The values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been calculated in accordance with DIN 50141. Each user must determine individually whether the ball lock pin is suitable for the respective application.

Different materials in which the ball lock pins are used, weather conditions and wear can influence the determined values.

Advantages:

Wide connections possible.

The pin length does not need to be coordinated with the component width.

On request:

Other pin lengths.

Accessories:

Adapter bushes for ball lock pins with head lock K1416.

Safety spiral cable K0367

Retaining cable with eyelet K0367

Key ring K0367

Ball lock pins with L-grip

stainless steel, with head-end lock



KIPP Ball lock pins stainless steel with L-grip, with head-end lock

Order No.	B	D	D1	D2	D3	D4	D5	L	L1	L2	L3	L5	Receiving hole H11	Shearing force double shear max.kN
K1415.102605***	17,6	39,3	5	5,5	13,2	26	1,5	3	47/97/147	25	19,2	50/100/150	5	10
K1415.102606***	17,6	39,3	6	6,85	13,2	26	2	3	47/97/147	25	19,2	50/100/150	6	14
K1415.103508***	23	52,2	8	9,5	17,3	35,4	3	3,5	96,5/146,5/196,5	33	24,2	100/150/200	8	26
K1415.103510***	23	52,2	10	12	17,3	35,4	4	3,5	96,5/146,5/196,5	33	24,2	100/150/200	10	40
K1415.104712***	33	70,2	12	14,5	26,3	47	4,5	3,5	146,5/196,5/246,5	39,5	28,4	150/200/250	12	57
K1415.104716***	33	70,2	16	19	26,3	47	6,5	4	146/196/246	39,5	28,4	150/200/250	16	100