


Rod ends igubal® with plain bearing

internal thread, similar to DIN ISO 12240-4

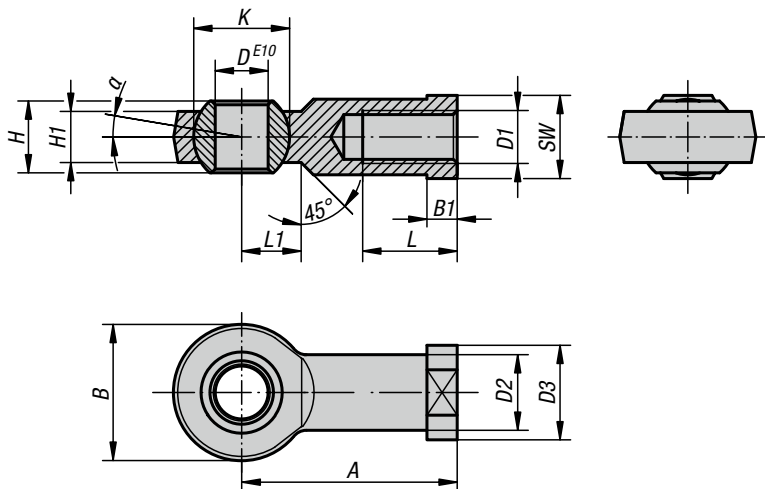

Material:
Housing igumid® G.
Bearing seat iglidur® W300.

Version:
Black.

Sample order:
K1466.106

KIPP Rod ends igubal® with plain bearing internal thread, similar to DIN ISO 12240-4

Order No. RH thread	Order No. LH thread	D	D1	D2	D3	A	B	B1	H	H1	K	L	L1	SW	α
K1466.104	K1466.1041	5	M4	9	12	27	18	4	8	6	11,1	10	9	9	15°
K1466.105	K1466.1051	5	M5	9	12	27	18	4	8	6	11,1	10	9	9	15°
K1466.106	K1466.1061	6	M6	10	13	30	20	5	9	7	12,7	12	10	11	14,5°
K1466.108	K1466.1081	8	M8	13	16	36	24	5	12	9	15,8	16	12	14	12,5°
K1466.110	K1466.1101	10	M10	15	19	43	30	6,5	14	10,5	19	20	14	17	12,5°
K1466.110125	K1466.1101251	10	M10x1,25	15	19	43	30	6,5	14	10,5	19	20	14	17	12,5°
K1466.112	K1466.1121	12	M12	18	22	50	34	6,5	16	12	22,2	22	16	17	12,5°
K1466.112125	K1466.1121251	12	M12x1,25	18	22	50	34	6,5	16	12	22,2	22	16	19	12,5°
K1466.114	K1466.1141	14	M14	20	25	57	38	8	19	13,5	25,25	25	18	22	11,5°
K1466.116	K1466.1161	16	M16	22	27	64	42	8	21	15	28,3	28	21	22	11,5°
K1466.116150	K1466.1161501	16	M16x1,5	22	27	64	42	8	21	15	28,3	28	21	22	11,5°
K1466.118150	K1466.1181501	18	M18x1,5	25	31	71	46	10	23	16,5	31,35	32	23	27	11,5°
K1466.120	K1466.1201	20	M20	28	34	77	50	10	25	18	34,9	33	25	30	11,5°
K1466.120150	K1466.1201501	20	M20x1,5	28	34	77	50	10	25	18	34,9	33	25	30	11,5°

Note:
The rod end has very high rigidity under alternating stresses, it is insensitive to dirt, dust and lint, and is both corrosion and chemical resistant. It is ideal for rotary, oscillating and linear movements. The connection dimensions comply DIN ISO 12240 series K.

Tolerances:
The bore of the inner ring has an E10 tolerance. The shaft tolerance should be between h6 and h9.

Order No. RH thread	Order No. LH thread	D1	Max. static tensile stress N short-term	Max. static tensile stress N long-term	Max. transverse stress N short-term	Max. transverse stress N long-term
K1466.104	K1466.1041	M4	1000	500	250	125
K1466.105	K1466.1051	M5	1000	500	250	125
K1466.106	K1466.1061	M6	1400	700	400	200
K1466.108	K1466.1081	M8	2100	1050	700	350
K1466.110	K1466.1101	M10	3100	1550	800	400
K1466.110125	K1466.1101251	M10x1,25	3100	1550	800	400
K1466.112	K1466.1121	M12	3600	1800	900	450
K1466.112125	K1466.1121251	M12x1,25	3600	1800	900	450
K1466.114	K1466.1141	M14	4000	2000	1000	500
K1466.116	K1466.1161	M16	4200	2100	1300	650
K1466.116150	K1466.1161501	M16x1,5	4200	2100	1300	650
K1466.118150	K1466.1181501	M18x1,5	4600	2300	1600	800
K1466.120	K1466.1201	M20	5400	2700	2100	1050
K1466.120150	K1466.1201501	M20x1,5	5400	2700	2100	1050