


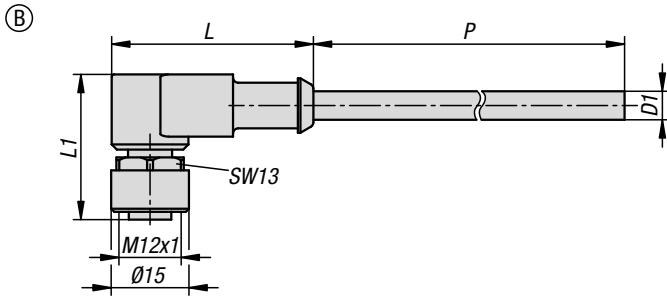


Connectors bush M12x1


with screw lock

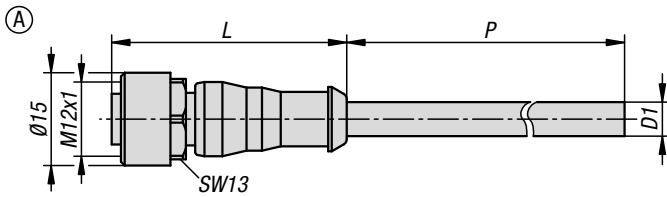


1 brown
3 blue
4 black



1 white
2 brown
3 green
4 yellow
5 grey
6 pink
7 blue
8 red



1 brown
2 white
3 blue
4 black



1 brown
2 blue
3 white
4 green
5 pink
6 yellow
7 black
8 grey
9 red
10 violet
11 grey-pink
12 red-blue

Material:

Housing: plastic.
Cable: PUR
(4 pole length 3 and 5 metres PVC.
8 pole length 10 metres PVC.
12 pole length 10 metres PVC).
Insulation braid: PP
(4 pole length 3 and 5 metres PVC.
8 pole length 10 metres PVC.
12 pole length 10 metres PVC).
Contact: copper alloy.
Contact surface: Au (gold).
Lock: nickel plated die-cast zinc.

Version:

Bush (female).
Housing colour: black.
Cable colour: black.

Sample order:

K1498.1203X5000

Note:

Connector with screw lock.
Connector moulded to cable.
Wire ID acc. to DIN 47100 colour code.
Coding A. Recommended tightening torque for the lock 0.6 Nm.
The connectors are designed for use in plant, control and electrical appliance construction.

Technical data:

No. of connection cycles: ≥ 100.

KIPP Connector bush M12x1, with screw lock

Order No.	Version 2	Form	Form definition	P	D1	L	No. of conductors x conductor cross-section	Safety rating	Operating voltage V
-	3-pin	A	straight bush	2000	4,1	38	3 x 0,34 mm ²	IP65/IP67	250 AC / 250 DC
K1498.1203X5000	3-pin	A	straight bush	5000	4,1	38	3 x 0,34 mm ²	IP65/IP67	250 AC / 250 DC
K1498.1204X3000	4-pin	A	straight bush	3000	5	38	N=4 X 0,34 mm ²	IP65/IP67	250 AC / 250 DC
K1498.1204X5000	4-pin	A	straight bush	5000	5	38	N=4 X 0,34 mm ²	IP65/IP67	250 AC / 250 DC
K1498.1208X2500	8-pin	A	straight bush	2500	5,8	43,5	8 x 0,25 mm ²	IP65/IP67	30 AC / 30 DC
K1498.1208X5000	8-pin	A	straight bush	5000	5,8	43,5	8 x 0,25 mm ²	IP65/IP67	30 AC / 30 DC
K1498.1208X10000	8-pin	A	straight bush	10000	6	43,5	8 x 0,25 mm ²	IP65/IP67	30 AC / 30 DC
K1498.1212X3000	12-pin	A	straight bush	3000	6	43,5	12 x 0,14 mm ²	IP65/IP67	30 AC / 30 DC
K1498.1212X5000	12-pin	A	straight bush	5000	6	43,5	12 x 0,14 mm ²	IP65/IP67	30 AC / 30 DC
K1498.1212X10000	12-pin	A	straight bush	10000	6	43,5	12 x 0,14 mm ²	IP65/IP67	30 AC / 30 DC