

Rubber impact buffers type TP door buffer

Item description/product images



Description

Material:

Elastomer, natural rubber, medium hardness, 60 Shore A

Note:

Screw on rubber impact buffers. Can also be used as machine feet.

Due to the material composition, rubber buffers are contact-colouring, which can lead to abrasion marks and discolouration on e.g. floors or contact surfaces.

Rubber buffers made of light grey EPDM that are not contact-colouring are available on request.


Temperature range:

-30 °C to +80 °C

On request:

Other Shore grades.

Drawings

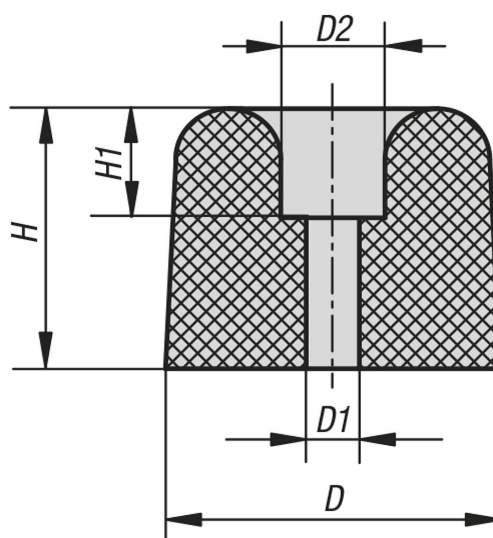

Overview of items

Rubber impact buffer, type TP door buffer

Order No.	D	D1	D2	H	H1
K1931.02601560	26	4	12	15	9
K1931.03002260	30	7	11	21	5
K1931.03503060	35	8	17	30	10
K1931.04003560	40	7	20	35	8

