

Telescopic slides, steel for side mounting, over-extension, load capacity up to 70 kg

Item description/product images



Description

Material:

Slides steel.
Ball cages steel.
Balls, steel.

Version:

Slides electro zinc-plated.
Ball cages, electro zinc-plated.
Balls hardened.

Note for ordering:

Sold in pairs.

Note:

On telescopic slides with over-extension, the travel is greater than the installed length.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacity specified is calculated with a slide spacing of 450 mm and is based on the maximum value with 10,000 cycles.

The load capacity is ca. 75% lower by horizontal mounting.

The head height of the fastening screws should not exceed 2.5 mm otherwise there is a risk of collision with other parts of the slide.

Temperature range:


-20 °C - +70 °C.

Advantages:

Suitable for flat mounting
Light running
Precise guidance for high lateral stability

Telescopic slides, steel for side mounting, over-extension, load capacity up to 70 kg

Drawings

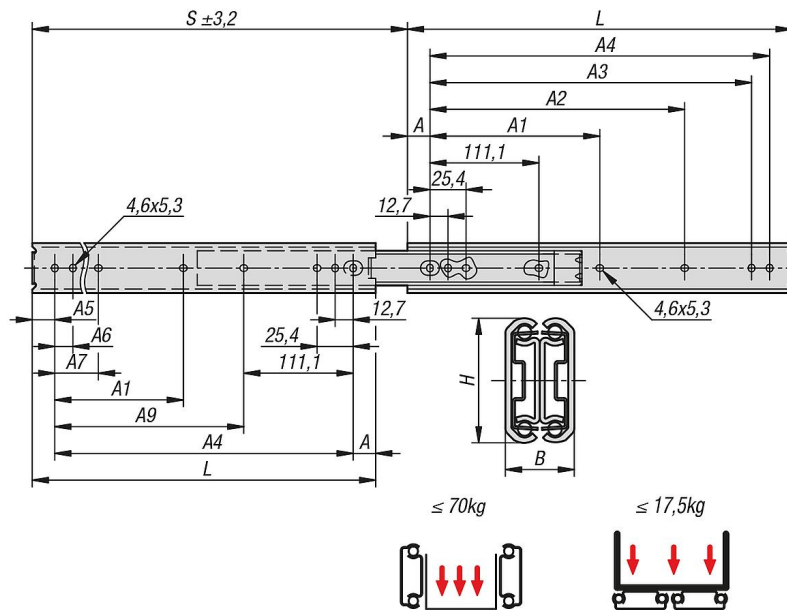

Overview of items

Steel telescopic slides for side mounting, over-extension, load capacity up to 70 kg

Order No.	Assembly	Product type	Loading per pair kg	Packaging type
K2389.0305	side mounting	standard	70	1 piece = 1 pair
K2389.0356	side mounting	standard	67	1 piece = 1 pair
K2389.0406	side mounting	standard	65	1 piece = 1 pair
K2389.0457	side mounting	standard	63	1 piece = 1 pair
K2389.0508	side mounting	standard	60	1 piece = 1 pair
K2389.0559	side mounting	standard	55	1 piece = 1 pair
K2389.0610	side mounting	standard	50	1 piece = 1 pair
K2389.0660	side mounting	standard	45	1 piece = 1 pair
K2389.0711	side mounting	standard	40	1 piece = 1 pair

Order No.	A	A1	A2	A3	A4	A5	A6	A7	A9	B	H	Travel S	L
K2389.0305	15,9	-	149,2	260,3	273	16,1	12,7	123,8	161,9	19,1	35,3	327	305
K2389.0356	15,9	-	200	311,1	323,8	16,3	12,7	123,8	212,7	19,1	35,3	378	356
K2389.0406	15,9	-	250,8	361,9	374,6	15,5	12,7	123,8	263,5	19,1	35,3	429	406
K2389.0457	15,9	212,7	301,6	412,7	425,4	15,7	12,7	123,8	314,3	19,1	35,3	480	457
K2389.0508	15,9	238,1	352,4	463,5	476,2	15,9	12,7	123,8	365,1	19,1	35,3	530	508
K2389.0559	15,9	263,5	403,2	514,3	527	16,1	12,7	123,8	415,9	19,1	35,3	581	559
K2389.0610	15,9	288,9	454	565,1	577,8	16,3	12,7	123,8	466,7	19,1	35,3	632	610
K2389.0660	15,9	314,3	504,8	615,9	628,6	15,5	12,7	123,8	517,5	19,1	35,3	683	660
K2389.0711	15,9	339,7	555,6	666,7	679,4	15,7	12,7	123,8	568,3	19,1	35,3	734	711