

Telescopic slides, steel for side mounting full extension, load capacity up to 20 kg

Item description/product images



Description

Material:

Slides steel.
Ball cages steel.
Balls, steel.

Version:

Slides electro zinc-plated.
Ball cages, electro zinc-plated.
Balls hardened.

Note for ordering:

Sold in pairs.

Note:

By telescopic slides with full extension, the travel is roughly equal to the installed length, which ensures greater comfort and accessibility.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacity specified is calculated with a slide spacing of 450 mm and is based on the maximum value with 80,000 cycles.


Not suitable for horizontal mounting.

The head height of the fastening screws should not exceed 1.8 mm otherwise there is a risk of collision with other parts of the slide.

Advantages:

Low slide thickness
Light running
Precise guidance for high lateral stability

Drawings

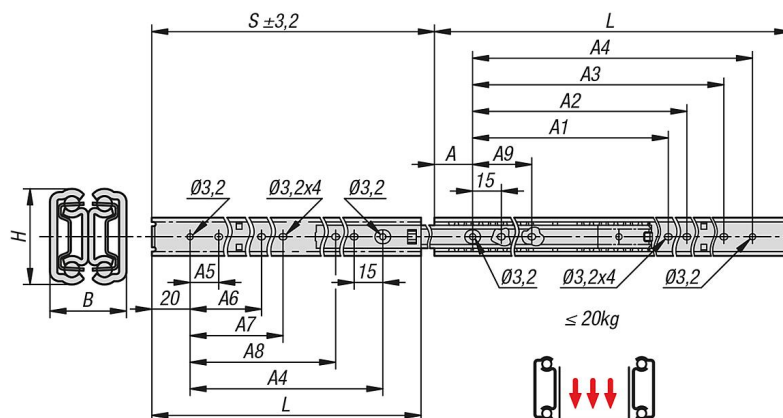

Overview of items

Steel telescopic slides for side mounting, full extension, load capacity up to 20 kg

Telescopic slides, steel for side mounting full extension, load capacity up to 20 kg

Overview of items

Order No.	Assembly	Product type	Loading per pair kg	Packaging type
K2391.0150	side mounting	standard	15	1 piece = 1 pair
K2391.0200	side mounting	standard	17	1 piece = 1 pair
K2391.0250	side mounting	standard	19	1 piece = 1 pair
K2391.0300	side mounting	standard	20	1 piece = 1 pair
K2391.0350	side mounting	standard	20	1 piece = 1 pair
K2391.0400	side mounting	standard	18	1 piece = 1 pair
K2391.0450	side mounting	standard	16	1 piece = 1 pair
K2391.0500	side mounting	standard	13	1 piece = 1 pair

Order No.	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	H	Travel S	L
K2391.0150	20	-	-	95	110	15	-	-	-	-	16	20	156	150
K2391.0200	20	-	-	145	160	15	-	-	60	100	16	20	231	200
K2391.0250	20	-	-	195	210	15	-	-	110	100	16	20	280	250
K2391.0300	20	-	160	245	260	15	100	-	160	100	16	20	329	300
K2391.0350	20	-	210	295	310	15	100	-	210	100	16	20	379	350
K2391.0400	20	-	260	345	360	15	100	-	260	100	16	20	428	400
K2391.0450	20	205	310	395	410	15	100	205	310	100	16	20	477	450
K2391.0500	20	230	360	445	460	15	100	230	360	100	16	20	526	500