

Telescopic slides, stainless steel, for side mounting, over-extension, load capacity up to 12 kg

Item description/product images



Description

Material:

Rails and ball cage stainless steel 1.4301.

Style A and C:

Balls steel.

Style B and D:

Balls stainless steel 1.4125.

Version:

Rails bright.

Balls hardened.

Note for ordering:

Sold individually.

Note:

On telescopic slides with over-extension, the travel is greater than the installed length. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used.

The specified load capacities refer to the maximum value at 50,000 cycles.

The load capacity is ca. 75 % lower by horizontal mounting.

The head height of the fastening screws should not exceed 0,9 mm otherwise there is a risk of collision with other parts of the slide.

style A: greased, with holes.

style B: with food-grade lubricant, with holes.

style C: greased, with thread.

style D: with food-grade lubricant, with thread.

A lubricant (NSF H1) that is suitable for the foodstuff industry is used.

Recommended screws: M 2.6.

Maximum screw length = panel thickness + 1.7 mm.

Temperature range:

5 °C to 35 °C

Advantages:

Smooth running


High lateral stability due to precise guidance

Drawing reference:

1) the rails with length 80 mm have no hole here

Telescopic slides, stainless steel, for side mounting, over-extension, load capacity up to 12 kg

Drawings

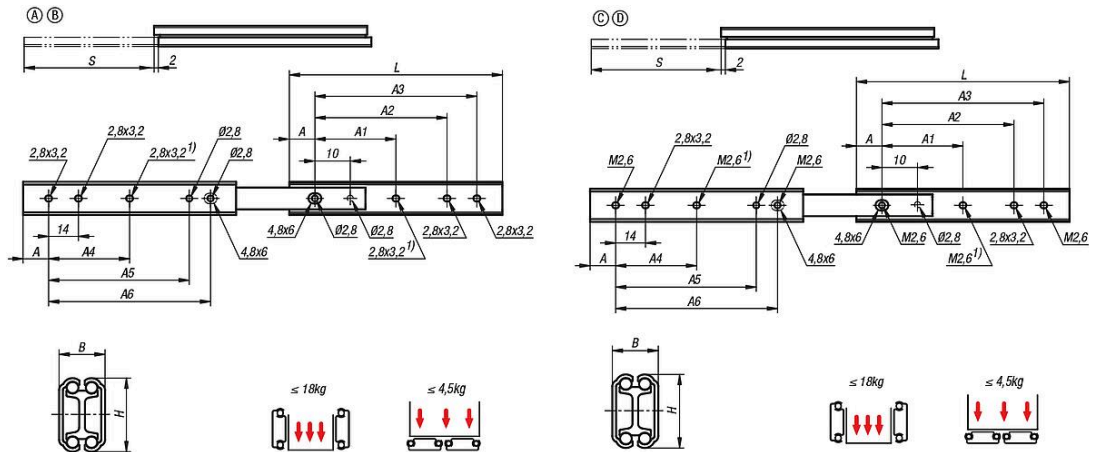

Overview of items

Telescopic slides, stainless steel, for side mounting, over-extension, load capacity up to 12 kg

Order No.	Form	A	A1	A2	A3	A4	A5	A6	B	H	L	Travel S	Loading per pair kg
K2453.10080	A	12	-	42	56	-	46	56	9,7	15,5	80	97	10
K2453.10100	A	12	38	62	76	38	66	76	9,7	15,5	100	125	11
K2453.10150	A	12	63	112	126	63	116	126	9,7	15,5	150	177	12
K2453.20080	B	12	-	42	56	-	46	56	9,7	15,5	80	97	10
K2453.20100	B	12	38	62	76	38	66	76	9,7	15,5	100	125	11
K2453.20150	B	12	63	112	126	63	116	126	9,7	15,5	150	177	12
K2453.30080	C	12	-	42	56	-	46	56	9,7	15,5	80	97	10
K2453.30100	C	12	38	62	76	38	66	76	9,7	15,5	100	125	11
K2453.30150	C	12	63	112	126	63	116	126	9,7	15,5	150	177	12
K2453.40080	D	12	-	42	56	-	46	56	9,7	15,5	80	97	10
K2453.40100	D	12	38	62	76	38	66	76	9,7	15,5	100	125	11
K2453.40150	D	12	63	112	126	63	116	126	9,7	15,5	150	177	12