

Positioning feet



Material:
Steel.



Version:
Case-hardened and black oxidised.

Sample order:
nlm 02040-215

Note:
Positioning feet are used as supports, stops and thrust pads for fixtures and general machine and appliance construction.

Drawing reference:

- Form A: External thread and flat face
- Form B: External thread and convex face
- Form C: External thread and serrated face
- Form K: External thread and carbide serrated face
- Form L: External thread and POM insert
- Form D: External thread and flat face
- Form E: External thread and convex face
- Form F: External thread and serrated face

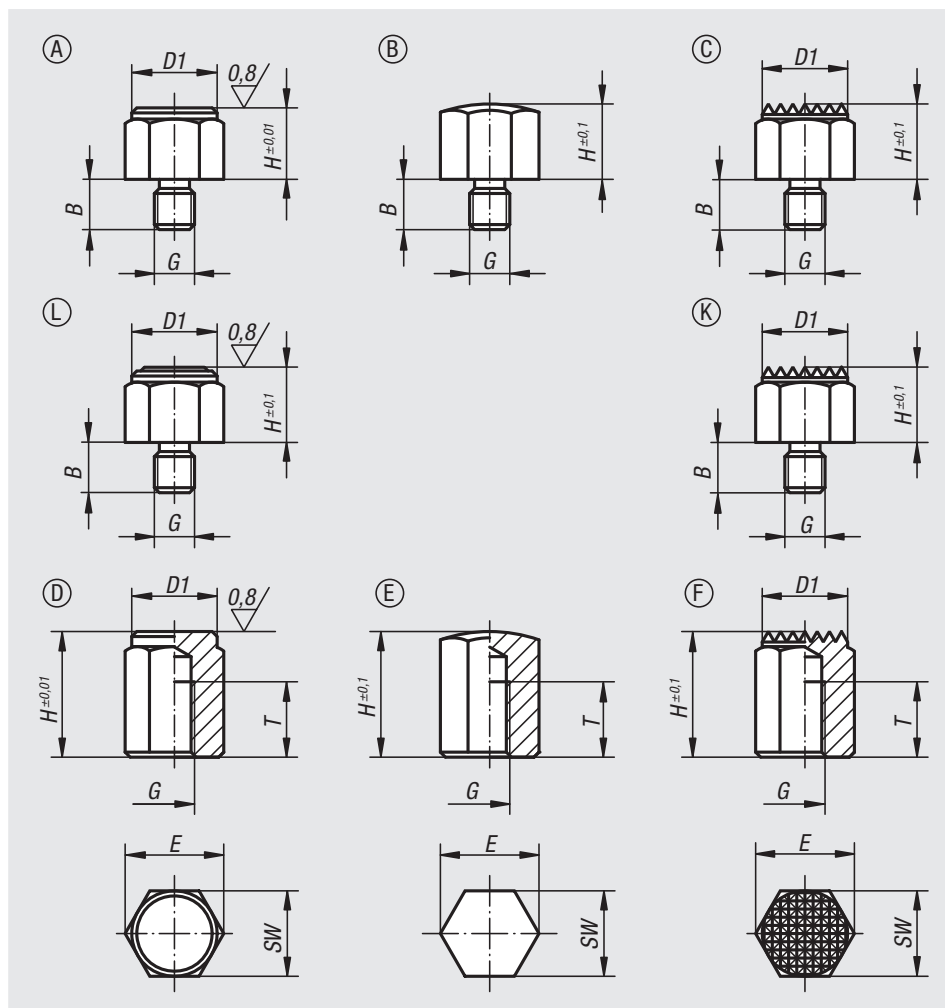

Order No.	Form	B	D1	G	H	E	SW	Tightening torque max. Nm
02040-108	A	8	13	M6	8	14,4	13	8,5
02040-1104	A	10	13	M6	10	14,4	13	8,5
02040-1081	A	10	17	M8	8	19,4	17	18
02040-1101	A	10	17	M8	10	19,4	17	18
02040-1103	A	12	19	M10	10	21,1	19	32
02040-1152	A	12	19	M10	15	21,1	19	32
02040-110	A	14	22	M12	10	25,2	22	60
02040-115	A	14	22	M12	15	25,2	22	60
02040-1151	A	19	30	M16	15	33	30	140
02040-1201	A	19	30	M16	20	33	30	140

Positioning feet

Order No.	Form	B	G	H	E	SW	Tightening torque max. Nm
02040-208	B	8	M6	8	14,4	13	8,5
02040-2104	B	10	M6	10	14,4	13	8,5
02040-2081	B	10	M8	8	19,4	17	18
02040-2101	B	10	M8	10	19,4	17	18
02040-2103	B	12	M10	10	21,1	19	32
02040-2152	B	12	M10	15	21,1	19	32
02040-210	B	14	M12	10	25,2	22	60
02040-215	B	14	M12	15	25,2	22	60
02040-2151	B	19	M16	15	33	30	140
02040-2201	B	19	M16	20	33	30	140

Order No.	Form	B	D1	G	H	E	SW	Tightening torque max. Nm
02040-308	C	8	13	M6	8	14,4	13	8,5
02040-3102	C	10	13	M6	10	14,4	13	8,5
02040-3081	C	10	17	M8	8	19,4	17	18
02040-3101	C	10	17	M8	10	19,4	17	18
02040-3103	C	12	19	M10	10	21,1	19	32
02040-3152	C	12	19	M10	15	21,1	19	32
02040-310	C	14	22	M12	10	25,2	22	60
02040-315	C	14	22	M12	15	25,2	22	60
02040-3151	C	19	30	M16	15	33	30	140
02040-3201	C	19	30	M16	20	33	30	140

Order No.	Form	B	D1	G	H	E	SW	Tightening torque max. Nm
02040-7101	K	10	17	M8	10	19,4	17	18
02040-710	K	14	22	M12	10	25,2	22	60
02040-715	K	14	22	M12	15	25,2	22	60
02040-7151	K	19	30	M16	15	33	30	140
02040-7201	K	19	30	M16	20	33	30	140

Order No.	Form	B	D1	G	H	E	SW	Tightening torque max. Nm
02040-8101	L	10	17	M8	10	19,4	17	18
02040-810	L	14	22	M12	10	25,2	22	60
02040-815	L	14	22	M12	15	25,2	22	60
02040-8151	L	19	30	M16	15	33	30	140
02040-8201	L	19	30	M16	20	33	30	140

Positioning feet

Order No.	Form	D1	G	H	T	E	SW
02040-410	D	13	M6	10	6	14,4	13
02040-4151	D	13	M6	15	10	14,4	13
02040-4101	D	17	M8	10	6	19,4	17
02040-415	D	17	M8	15	6	19,4	17
02040-4251	D	17	M8	25	16	19,4	17
02040-4201	D	19	M10	20	10	21,1	19
02040-4302	D	19	M10	30	15	21,1	19
02040-4401	D	19	M10	40	15	21,1	19
02040-420	D	22	M12	20	10	25,2	22
02040-425	D	22	M12	25	15	25,2	22
02040-430	D	22	M12	30	20	25,2	22
02040-440	D	22	M12	40	25	25,2	22
02040-450	D	22	M12	50	25	25,2	22
02040-4301	D	30	M16	30	20	33	30
02040-4501	D	30	M16	50	25	33	30

Order No.	Form	G	H	T	E	SW
02040-510	E	M6	10	6	14,4	13
02040-5151	E	M6	15	10	14,4	13
02040-5101	E	M8	10	6	19,4	17
02040-515	E	M8	15	6	19,4	17
02040-5251	E	M8	25	16	19,4	17
02040-5201	E	M10	20	10	21,1	19
02040-5302	E	M10	30	15	21,1	19
02040-5401	E	M10	40	15	21,1	19
02040-520	E	M12	20	10	25,2	22
02040-525	E	M12	25	15	25,2	22
02040-530	E	M12	30	20	25,2	22
02040-540	E	M12	40	25	25,2	22
02040-550	E	M12	50	25	25,2	22
02040-5301	E	M16	30	20	33	30
02040-5501	E	M16	50	25	33	30

Order No.	Form	D1	G	H	T	E	SW
02040-610	F	13	M6	10	6	14,4	13
02040-6151	F	13	M6	15	10	14,4	13
02040-6101	F	17	M8	10	6	19,4	17
02040-615	F	17	M8	15	6	19,4	17
02040-6251	F	17	M8	25	16	19,4	17
02040-6201	F	19	M10	20	10	21,1	19
02040-6302	F	19	M10	30	15	21,1	19
02040-6401	F	19	M10	40	15	21,1	19
02040-620	F	22	M12	20	10	25,2	22
02040-625	F	22	M12	25	15	25,2	22
02040-630	F	22	M12	30	20	25,2	22
02040-640	F	22	M12	40	25	25,2	22
02040-650	F	22	M12	50	25	25,2	22
02040-6301	F	30	M16	30	20	33	30
02040-6501	F	30	M16	50	25	33	30