

Parallel key, ceramic

similar to DIN 6885 A



Material:

High performance ceramic Z141.

Version:


Ground

Sample order:


nIm 03288-01-03X8 (include length L)

Note:

Parallel keys are used for the implementation of shaft-hub connections. These are positive connections which are used to transmit torque.

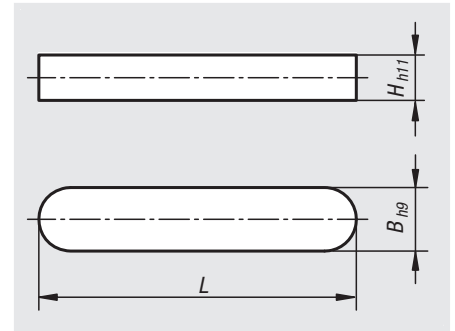

Application example:



Order No.	B	H	L = length
03288-01-03X	3	3	8/16/25
03288-01-04X	4	4	8/16/25
03288-01-05X	5	5	12/22/40
03288-01-06X	6	6	12/22/40
03288-01-08X	8	7	14/70
03288-01-10X	10	8	22/36
03288-01-12X	12	8	25/40
03288-01-14X	14	9	25/40
03288-01-16X	16	10	50/70