

Parallel keys

DIN 6885 A

**Material:**


Steel 1.1192 or stainless steel 1.4571.

Version:


Bright.

Sample order:

nlm 03288-04X12 (include length L)

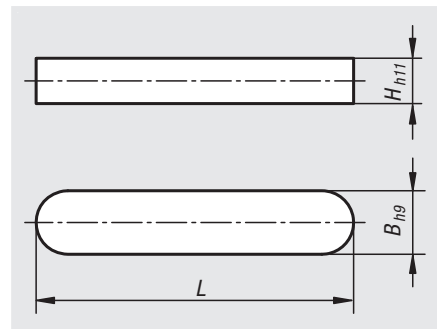

Application example:



Order No.	Main material	B	H	L = length
03288-03X	steel	3	3	8/10/12/14/16/18/20/22/25/28
03288-04X	steel	4	4	8/10/12/14/16/18/20/22/25/28
03288-05X	steel	5	5	12/14/16/18/20/22/25/28/32/36/40
03288-06X	steel	6	6	12/14/16/18/20/22/25/28/32/36/40/45
03288-08X	steel	8	7	14/16/18/20/22/25/28/32/36/40/45/50/70
03288-10X	steel	10	8	22/25/28/32/36/40/45/50/56/70/80
03288-12X	steel	12	8	25/28/32/36/40/45/50/56/70/80
03288-14X	steel	14	9	25/28/32/36/40/45/50/56/70/80
03288-16X	steel	16	10	50/56/63/70/80/90/100
03288-103X	stainless steel	3	3	10/12/16/20
03288-104X	stainless steel	4	4	10/12/14/16/18/20/22
03288-105X	stainless steel	5	5	12/14/16/18/20/22/25/28/36/40
03288-106X	stainless steel	6	6	12/14/16/18/20/22/25/28/32/36/40
03288-108X	stainless steel	8	7	16/18/20/22/25/28/32/36/40/45/50/70
03288-110X	stainless steel	10	8	22/25/28/32/36/40/45/50/56/70/80
03288-112X	stainless steel	12	8	28/32/36/40/45/50/56/70/80
03288-114X	stainless steel	14	9	32/40/45/50/56/70/80
03288-116X	stainless steel	16	10	50/63/70/80/90/100