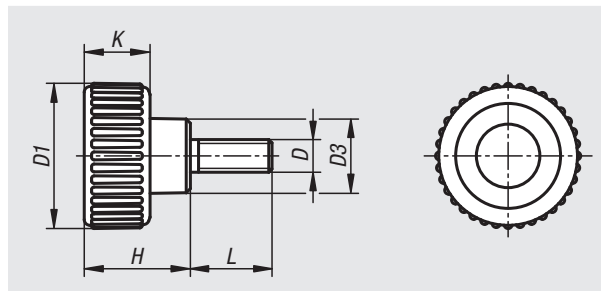


Knurled screws plastic

**Material:**

Reinforced polyamide thermoplastic, black grey.
Threaded pin 5.8 steel or stainless steel 1.4305.

Version:

Threaded pin trivalent blue passivated steel, bright stainless steel.

Sample order:

nIm 06091-01-2005X20 (include length L)

Advantages:


The knurled screws can be tightened or loosened without tools.

Suitable for manual fixing and clamping.

Various thread sizes and lengths.

Order No. steel	Order No. stainless steel	D	D1	D3	H	K	L
06091-01-1804X	06091-01-18042X	M4	18	9	13	8	10/15
06091-01-2005X	06091-01-20052X	M5	20	10,6	15	9	10/15/20
06091-01-2506X	06091-01-25062X	M6	25	12	17	10	10/15/20/30/40
06091-01-3208X	06091-01-32082X	M8	32	14	22	13	15/20/30/40
06091-01-4010X	06091-01-40102X	M10	40	18	25	14	20/30/40

Knurled screws plastic, antistatic

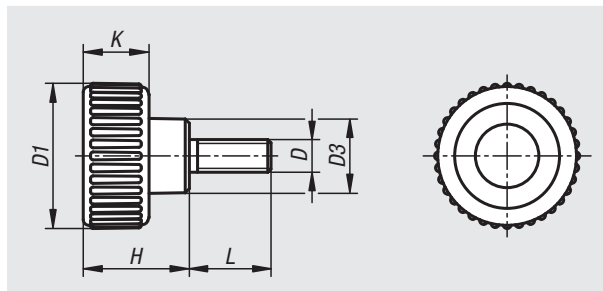
Material:

Reinforced polyamide thermoplastic, graphite grey.
Screw steel 5.8.

Version:

Screw blue passivated.

Sample order:

nIm 06091-01-11200524X20 (include length L)

Application:

Sensitive electrical or electronic equipment, components and devices (ESD sensitive elements) may be damaged or destroyed by electrostatic discharges (ESD) in the immediate vicinity. Electrostatic discharges can come from people or through handling ESD sensitive components (e.g. during production, assembly, transport, storage etc). Electrically conductive products which conform to DIN EN 61340-5-1 are essential within electronic environments to prevent an electrostatic discharge. These products can be used for ESD applications or in ESD protection areas (EPA) in accordance with DIN EN 61340-5-1.

Advantages:

To protect sensitive electrical or electronic parts, components and devices.
Areas of application: electrical assembly, equipment construction according to ATEX directives.
Made from a special electrically conductive plastic.
ESD operating parts have been specially designed for use in ESD protected areas.
The knurled screws can be tightened or loosened without tools.

Safety:

These ESD products can also be used for devices, components and protection systems in areas with high risk of explosion.
Use of these ESD products prevents the occurrence of electrostatic spark discharges, eliminating the potential ignition of gases and dusts which could lead to explosions in enclosed spaces.
Manufacturers and operators must use and conform to ATEX directives for the protection of persons working in areas with high risk of explosion.
These ESD products are certified by TÜV-Süd in relation to their electrical discharge capability.

Target groups:

Device manufacturers required to conform to ATEX product directive 2014/34/EU.
Operators required to conform to ATEX worker protection directive 1999/92/EC.

Order No.	D	D1	D3	H	K	L
06091-01-11180424X	M4	18	9	13	8	10/15
06091-01-11200524X	M5	20	10,6	15	9	10/15/20
06091-01-11250624X	M6	25	12	17	10	10/15/20
06091-01-11320824X	M8	32	14	22	13	15/20/30
06091-01-11401024X	M10	40	18	25	14	20/30