Palm grips

grey cast iron DIN 6335

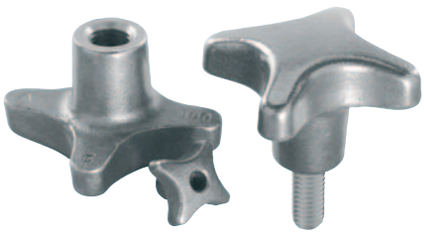

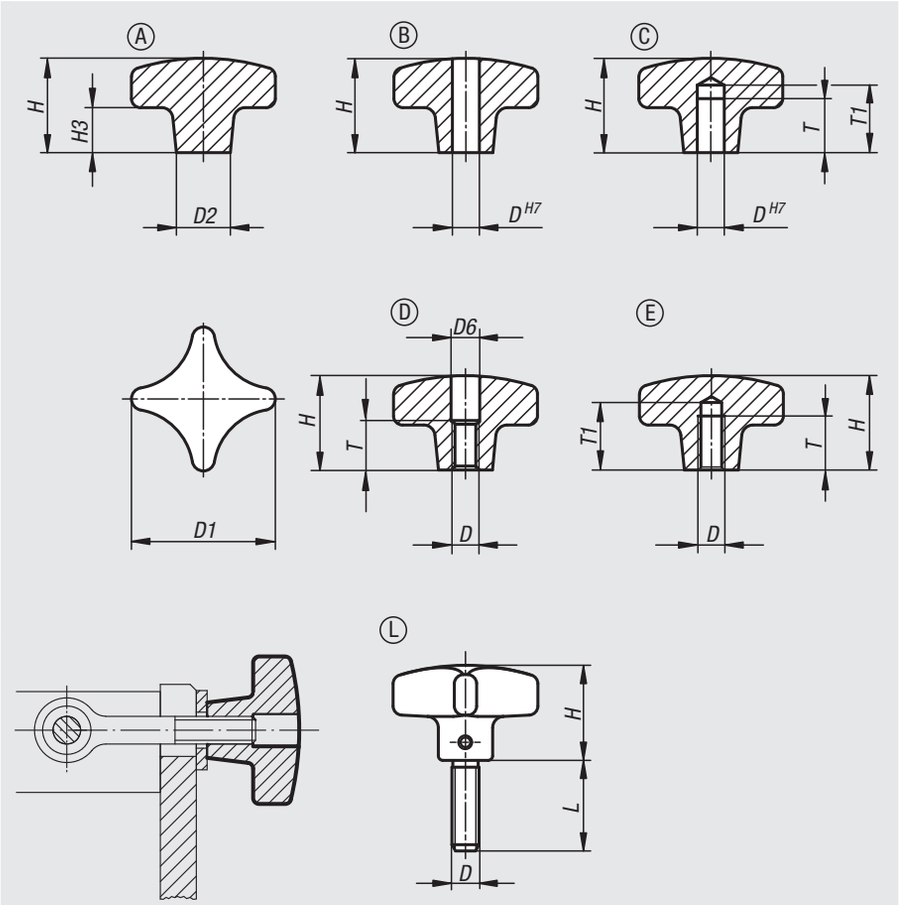

Material:
Grey cast iron GJL 200.
Grub screw stainless steel 1.4305.
Pin stainless steel 1.4310.

Version:
Vibratory ground, bright.
Grub screw and pin bright.

Sample order:
nlm 06160-606X20 (include length L.)

Drawing reference:
Form A: blank
Form B: drilled through
Form C: blind hole
Form D: tapped and counterbored
Form E: tapped blind hole
Form L: external thread

Order No. Form A	Order No. Form B	Version 1	D	D1	D2	H	H3
06160-106	**06160-206**	tumbled	-/6	32	12	21/20	10
06160-108	**06160-208**	tumbled	-/8	40	14	26/25	14
06160-110	**06160-210**	tumbled	-/10	50	18	34/32	20
06160-112	**06160-212**	tumbled	-/12	63	20	42/40	25
06160-116	**06160-216**	tumbled	-/16	80	25	52/50	30
06160-120	**06160-220**	tumbled	-/20	100	32	65/63	38

Order No. Form C	Order No. Form D	Order No. Form E	Version 1	D	D1	D2	H	H3	T	T1
06160-306	**06160-406**	**06160-506**	tumbled	6 / M6 / M6	32	12	20	10	12/10/12	15/-/15
06160-308	**06160-408**	**06160-508**	tumbled	8 / M8 / M8	40	14	25	14	15/13/15	18/-/18
06160-310	**06160-410**	**06160-510**	tumbled	10 / M10 / M10	50	18	32	20	18/16/18	21/-/21
06160-312	**06160-412**	**06160-512**	tumbled	12 / M12 / M12	63	20	40	25	22/20/22	25/-/25
06160-316	**06160-416**	**06160-516**	tumbled	16 / M16 / M16	80	25	50	30	28/20/28	32/-/32
06160-320	**06160-420**	**06160-520**	tumbled	20 / M20 / M20	100	32	63	38	36/25/36	40/-/40

Order No.	Form	Version 1	D	D1	H	L
06160-606X	L	tumbled	M6	32	20	15/20/25/30/40/50
06160-608X	L	tumbled	M8	40	25	20/25/30/40/50
06160-610X	L	tumbled	M10	50	32	20/25/30/40/50
06160-612X	L	tumbled	M12	63	40	20/30/40/50