

Torque screws

with thrust point




Material:
Steel.

Version:
Black oxidised.

Sample order:
nlm 07130-08X60 (include length L)

Note:
The torque required for the knurled screw is generated by two spring-mounted thrust balls. As soon as the adjustable final pressure is reached, the grip runs free. The final pressure is set using the set screws located in the head.


Forces:
F1 = Minimum final pressure
F2 = Maximum final pressure

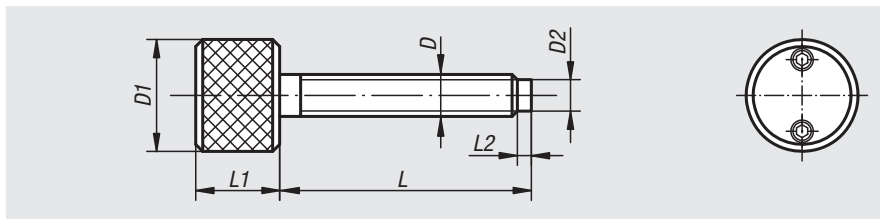

Order No.	D	D1	D2	L	L1	L2	F1 N	F2 N
07130-06X	M6	25	4,7	40/60	20	3	40	800
07130-08X	M8	25	6,5	40/60/80	20	3	40	650
07130-10X	M10	25	8,2	40/60/80	20	3	40	550
07130-12X	M12	25	10	40/60/80/100	20	3	40	450

Torque screws

with slot coupling




Material:
Steel.

Version:
Black oxidised.

Sample order:
nlm 07131-06

Note:
The torque required for the knurled screw is generated by two spring-mounted thrust balls. As soon as the adjustable final pressure is reached, the grip runs free. The final pressure is set using the set screws located in the head.

Forces:
F1 = Minimum final pressure
F2 = Maximum final pressure

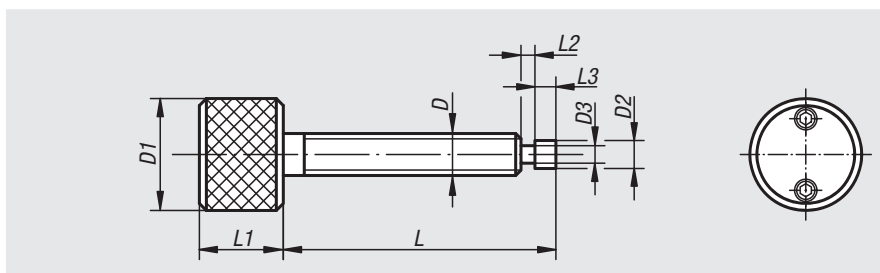

Order No.	D	D1	D2	D3	L	L1	L2	L3	F1 N	F2 N
07131-06	M6	25	4,7	2,5	45	20	8	5	40	800
07131-10	M10	25	7,7	4,5	45	20	8	5	40	550