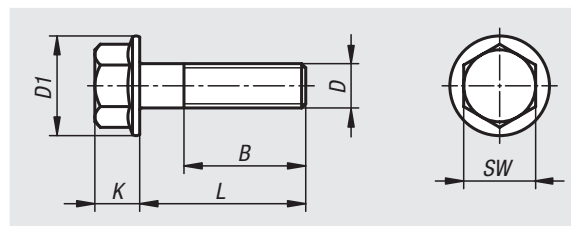


Hexagon head bolts with flange

EN 1665

**Material:**

Steel or stainless steel (A 2)

Version:

Steel grade 8.8, electro zinc-plated.
 Steel grade 10.9, electro zinc-plated.
 Bright stainless steel.

Sample order:

nlm 07172-06X12 (include length L)

Note:

Screws where the dimension L is < B are threaded up to the head.
 The screw length or thread length is specified by the dimension L.
 Screws where L is > B have a shaft.

Order No.	Main material	Grade	B	D	D1	K	SW	L
07172-406X	steel	8.8	18	M6	14,2	6,6	10	12/16/20/25/30
07172-408X	steel	8.8	22	M8	18	8,1	13	12/16/20/25/30/35/40/50/60
07172-410X	steel	8.8	26	M10	22,3	10,4	16	20/25/30/35/40/50
07172-412X	steel	8.8	30	M12	26,6	11,8	18	20/25/30/40/50
07172-416X	steel	8.8	38	M16	35	15,4	24	30/35/40/45/50/70
07172-506X	steel	10.9	18	M6	14,2	6,6	10	12/16/20/25/30
07172-508X	steel	10.9	22	M8	18	8,1	13	12/16/20/25/30/35/40
07172-510X	steel	10.9	26	M10	22,3	10,4	16	25/30/40
07172-512X	steel	10.9	30	M12	26,6	11,8	18	20/35/40/45/50
07172-516X	steel	10.9	38	M16	35	15,4	24	30/35/40/45/50/60
07172-106X	stainless steel	-	18	M6	14,2	6,6	10	12/16/20/25/30
07172-108X	stainless steel	-	22	M8	18	8,1	13	16/20/25/30/35/40/50
07172-110X	stainless steel	-	26	M10	22,3	10,4	16	20/25/30/35/40/50/60