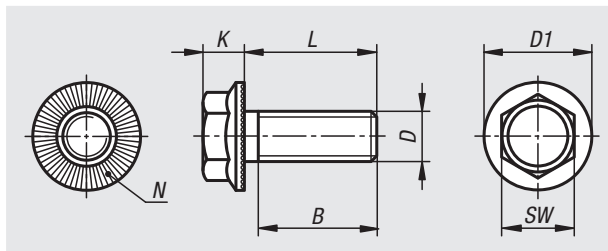


# Hexagon head bolts

with serrated flange


**Material:**

Steel.

**Version:**

Bright or electro zinc-plated.  
Surface hardened min. 550 HV.

**Sample order:**

nIm 07173-305X10 (include length L)

**Note:**

The serrations bite into the contact face resulting in a positive locking connection that prevents self-loosening. Can be re-used several times.

Grade 100 corresponds to ca. grade 10.9.

Order No.	Main colour	B	D	D1	K	L	N (number)	SW
07173-305X	-	8,4	M5	11,2	4,3	10/12/16/20	28	8
07173-306X	-	8	M6	14,2	5,5	10/12/16/20/25	36	10
07173-308X	-	9,5	M8	18,2	7	12/16/20/25/30/35/40	48	13
07173-310X	-	13	M10	21	8,5	16/20/25/30/35/40/45/50	48	15
07173-312X	-	16,5	M12	24	10	20/25/30/35/40/45/50/55/60/75	60	17
07173-316X	-	21	M16	31	14	25/30/35/40/45/50/55/60/65/70	72	22
07173-505X	galvanised	8,4	M5	11,2	4,3	10/12/16/20	28	8
07173-506X	galvanised	8	M6	14,2	5,5	10/12/16/20/25	36	10
07173-508X	galvanised	9,5	M8	18,2	7	12/16/20/25/30/40	48	13
07173-510X	galvanised	13	M10	21	8,5	16/20/25/30/35/40/50	48	15
07173-512X	galvanised	16,5	M12	24	10	20/25/30/35/40/45/50/60/75	60	17
07173-516X	galvanised	21	M16	31	14	25/35/40/45/50/55/60/70	72	22