

## Magnets deep pot


**Material:**

Housing, steel.  
Magnetic core AlNiCo.

**Version:**

Housing painted red.

**Sample order:**

nIm 09094-01

**Note:**

Hard magnet in aluminium housing and steel jacket.  
Shielded system. Pot magnets are used for retaining,  
lifting and mounting in fixtures.


Due to the painted surface, the diameter D can be  
up to +0.8 mm.

**Temperature range:**

max. 450°C.

**Drawing reference:**

1) magnetic face

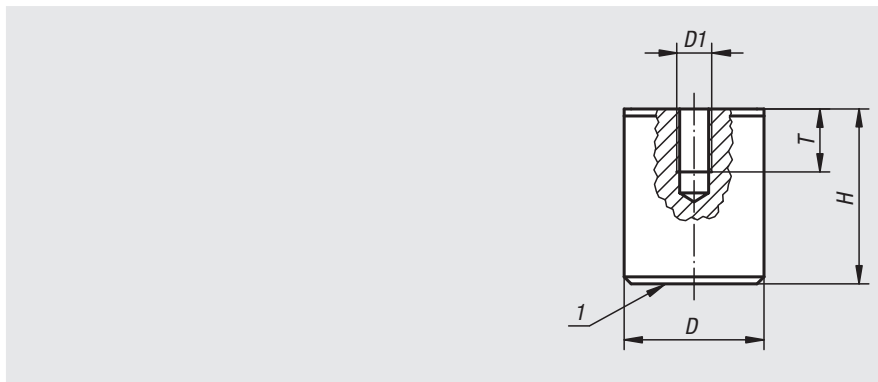

Order No.	D	D1	H	T	Magnetic force N
09094-01	17	M6	16	4	18
09094-02	21	M6	19	5	28
09094-03	27	M6	25	6	65
09094-04	35	M6	30	9	115
09094-05	65	M12	43	13	400

## Magnets shallow pot


**Material:**

Housing, steel.  
Magnetic core AlNiCo.

**Version:**

Housing painted red.

**Sample order:**

nIm 09096-01

**Note:**

Shielded system. Shallow pot magnets  
are used in fixtures with minimal space.

**Temperature range:**


max. 450°C.

**On request:**

Other colours.

**Drawing reference:**

1) magnetic face

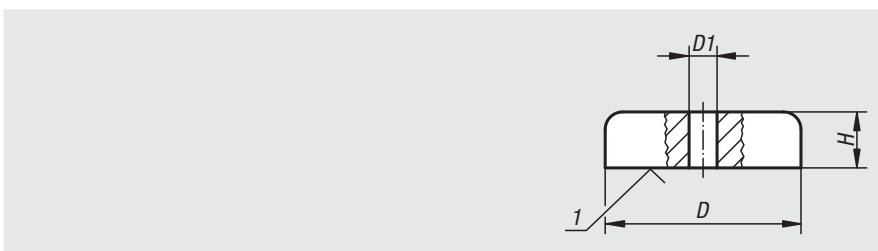

Order No.	D	D1	H	Magnetic force N
09096-01	19	3,5	8	30
09096-02	29	5	9	55
09096-03	38	5	10,5	95