

Item description/product images



**Description**

**Material:**

Body carbon steel.  
 Balls roller bearing steel.  
 Diverters plastic.

**Version:**

Bright.

**Note:**

Compact guide carriage with recirculating ball guidance precision H not preloaded (Z0). With double-sided end seal. 4-row versions with round arch profile. The profile guide rail tracks are arranged at 45° and can accept loads from all directions.

High dynamic values:  $v = 5 \text{ m/s}$ .

Applicable temperature in continuous use max. 80 °C.


**On request:**

Various precision and preload classes.

**Drawing reference:**

1) ground ref. edge

Drawings

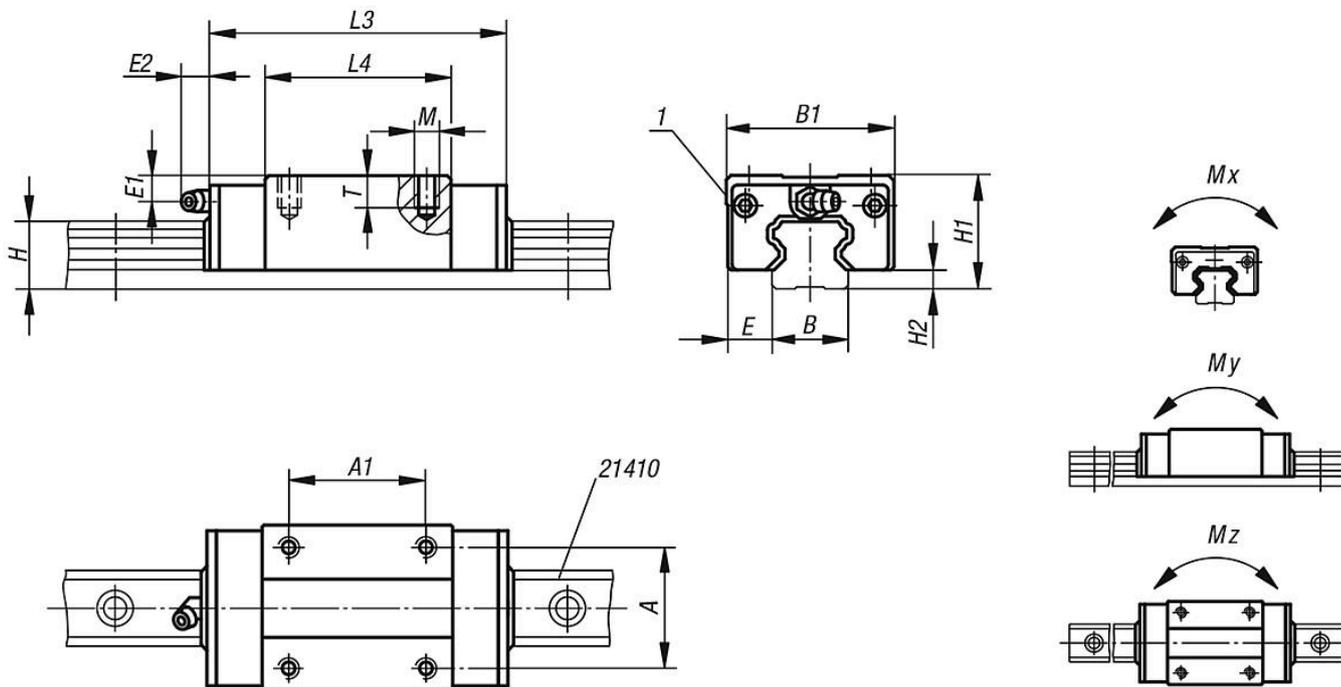

Overview of items

Order No.	A	A1	B	B1	E	E1	E2	Size	H	H1	H2	L3	L4	M	Mx Nm	My Nm	Mz Nm	Lubrication hole	T	Dynamic load rating N	Static load rating N
21411-10-15106310	26	26	15	34	9,5	4,3	4,15	15	14	24	4,6	63,1	40	M4	140	99	99	M3	4	8400	16200
21411-10-20107310	32	36	20	44	12	5,7	16,6	20	18	30	5	72,8	50	M5	244	173	173	M3	6,5	12300	22400

## Overview of items

Order No.	A	A1	B	B1	E	E1	E2	Size	H	H1	H2	L3	L4	M	Mx Nm	My Nm	Mz Nm	Lubrication hole	T	Dynamic load rating N	Static load rating N
21411-10-25108410	35	35	23	48	12,5	6,5	17,9	25	22	36	7	84	57	M6	480	340	340	M6	6,5	19900	36500
21411-10-30110010	40	40	28	60	16	8	15,8	30	26	42	9	100,4	67,4	M8	790	540	540	M6	8,5	27500	49500