

Item description/product images



Description

Material:

Body carbon steel.
Balls roller bearing steel.
Diverters plastic.

Version:

Bright.

Note:

Compact guide carriage with recirculating ball guide precision H not preloaded (Z0). With double-sided end seal. 4-row versions with round arch profile. The profile guide rail tracks are arranged at 45° and can accept loads from all directions.

High dynamic values: $v = 5$ m/s.

Applicable temperature in continuous use max. 80 °C.


On request:

Various precision and preload classes.

Drawing reference:

1) ground ref. edge

Drawings

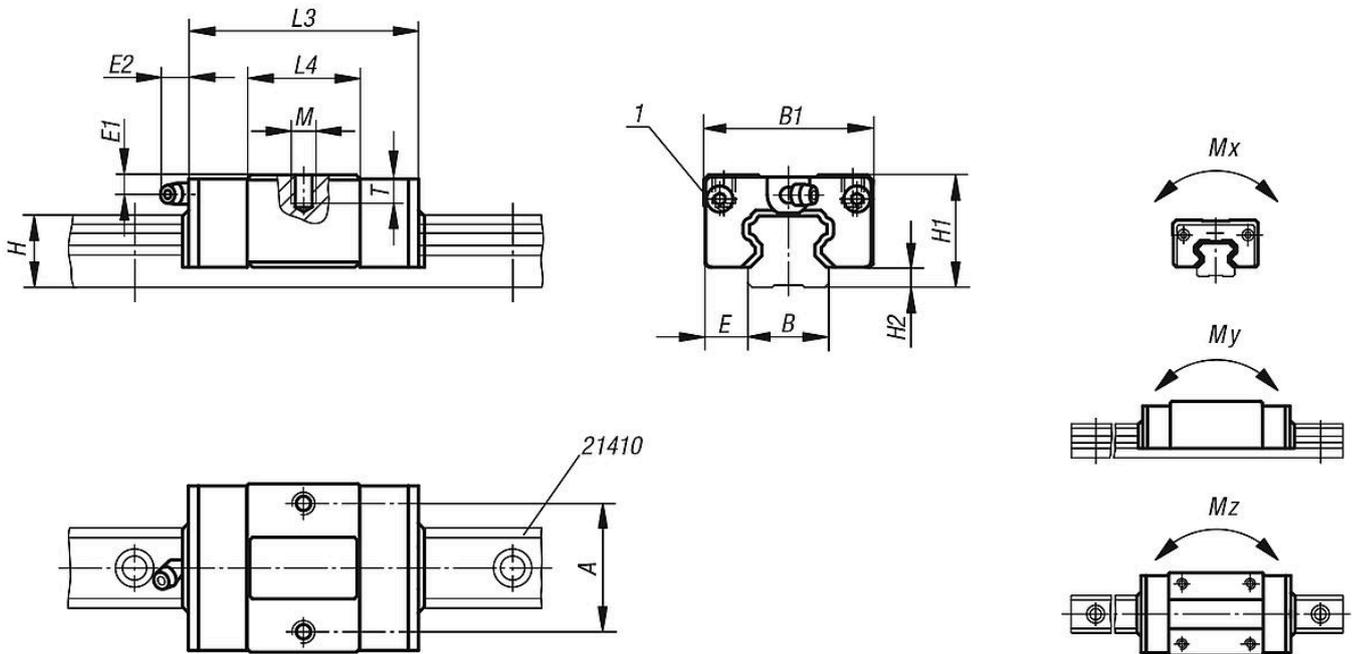

Overview of items

Order No.	Size	Mx Nm	My Nm	Mz Nm	Dynamic load rating N	Static load rating N	Lubrication hole	A	B	B1	E	E1	E2	H	H1	H2	L3	L4	M	T
21411-15-15004910	15	95	47	47	6300	10800	M3	26	15	34	9,5	4,3	4,15	14	24	4,6	48,7	25,6	M4	4
21411-15-20005510	20	163	83	83	9300	15000	M3	32	20	44	12	5,7	16,6	18	30	5	54,9	32,1	M5	6,5
21411-15-25006610	25	320	163	163	14900	24300	M6	35	23	48	12,5	6,5	17,9	22	36	7	65,8	38,8	M6	6,5

Overview of items

Order No.	Size	Mx Nm	My Nm	Mz Nm	Dynamic load rating N	Static load rating N	Lubrication hole	A	B	B1	E	E1	E2	H	H1	H2	L3	L4	M	T
21411-15-30007810	30	530	260	260	20700	33000	M6	40	28	60	16	8	15,8	26	42	9	78	45	M8	8,5