

Item description/product images



Description

Material:

Body carbon steel.
Balls roller bearing steel.
Diverters plastic.

Version:

Bright.

Note:

Standard guide carriage with recirculating ball guidance precision H not preloaded (Z0). With double-sided end seal. 4-row versions with round arch profile. The profile guide rail tracks are arranged at 45° and can accept loads from all directions.

High dynamic values: $v = 5 \text{ m/s}$.

Applicable temperature in continuous use max. 80 °C.


On request:

Various precision and preload classes.

Drawing reference:

1) ground ref. edge

Drawings

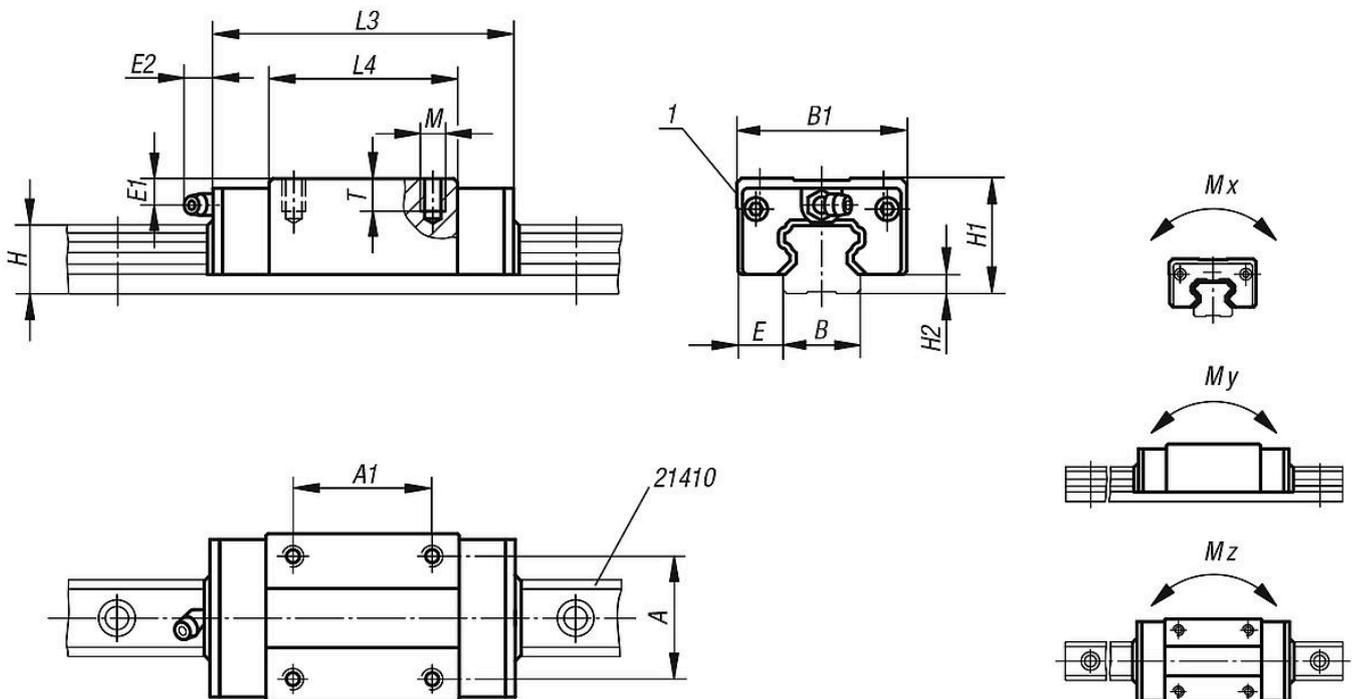

Overview of items

Order No.	Version 2	Size	Mx Nm	My Nm	Mz Nm	Dynamic load rating N	Static load rating N	Lubrication hole	A	A1	B	B1	E	E1	E2	H	H1	H2	L3	L4	M	T
21411-15106310	Standard	15	140	99	99	8400	16200	M3	26	26	15	34	9,5	8,3	4,15	14	28	4,6	63,1	40	M4	6,4
21411-20107310	Standard	20	244	173	173	12300	22400	M3	32	36	20	44	12	5,7	16,9	18	30	5	72,8	50	M5	8

Overview of items

Order No.	Version 2	Size	Mx Nm	My Nm	Mz Nm	Dynamic load rating N	Static load rating N	Lubrication hole	A	A1	B	B1	E	E1	E2	H	H1	H2	L3	L4	M	T
21411-25108410	Standard	25	480	340	340	19900	36500	M6	35	35	23	48	12,5	10,5	17,9	22	40	7	84	57	M6	9,6
21411-30110010	Standard	30	790	540	540	27500	49500	M6	40	40	28	60	16	11	15,8	26	45	9	100,4	67,4	M8	12,8
21411-25210610	long	25	640	590	590	24300	48500	M6	35	50	23	48	12,5	10,5	17,9	22	40	7	106,1	79,1	M6	9,6
21411-30212510	long	30	1060	940	940	34000	66000	M6	40	60	28	60	16	11	15,8	26	45	9	125,4	92,4	M8	12,8