


Item description/product images

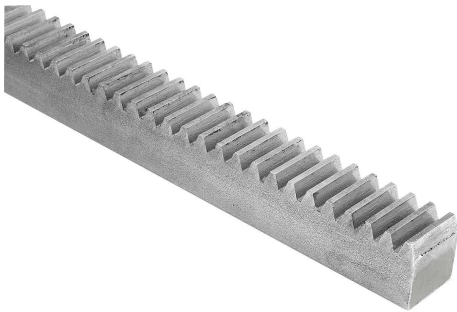

Description

Material:

Stainless steel 1.4305.

Version:


Milled tothing, straight teeth.
Engagement angle 20°, bright.

Note:


All gear racks from module 2, with the exception of nominal lengths of 500 mm, are suitable for consecutive mounting.

As the gear racks do not have teeth on the butt ends, small gaps occur during assembly. However, these are irrelevant for the running of the gears.

Drawings

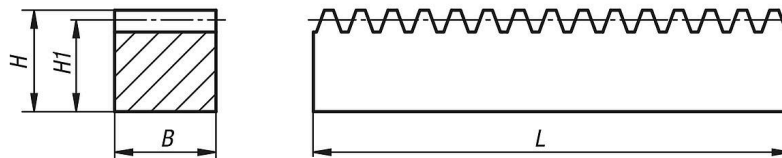

mounting in series

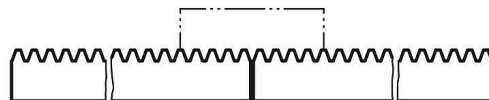

Overview of items

Order No.	Module	B	H	H1	L Nom. length
22420-20-110150X1000	1	15	15	14	1000
22420-20-110150X2000	1	15	15	14	2000
22420-20-115170X1000	1,5	17	17	15,5	1000
22420-20-115170X2000	1,5	17	17	15,5	2000
22420-20-120200X1000	2	20	20	18	1000
22420-20-120200X2000	2	20	20	18	2000
22420-20-125250X1000	2,5	25	25	22,5	1000
22420-20-125250X2000	2,5	25	25	22,5	2000
22420-20-130300X1000	3	30	30	27	1000
22420-20-130300X2000	3	30	30	27	2000
22420-20-140400X1000	4	40	40	36	1000
22420-20-140400X2000	4	40	40	36	2000

