

# Concentricity gauges

max.  $\varnothing$  80 mm

## Sample order:

nIm 32506-01

## Note:


Gauge unit suitable for measuring concentricity, run-out and perpendicularity. The robust design allows the unit to be used in the workshop and metrology room. A swivel contact roller simplifies positioning of the workpiece. The light sliding guides allow the dial gauges to be placed anywhere.

## Technical data:

Inspection range  $\varnothing$  5 mm to  $\varnothing$  80 mm  
 Roller spacing min. 29 mm, max. 89 mm.  
 Carriage travel max. 100 mm.  
 Contact roller thrust is adjustable.  
 Gear driven rollers.

Roller precision: parallelism and coaxialism of both rollers max. 2  $\mu$ m.

Base plate granite:  
 300 mm x 130 mm x 25 mm

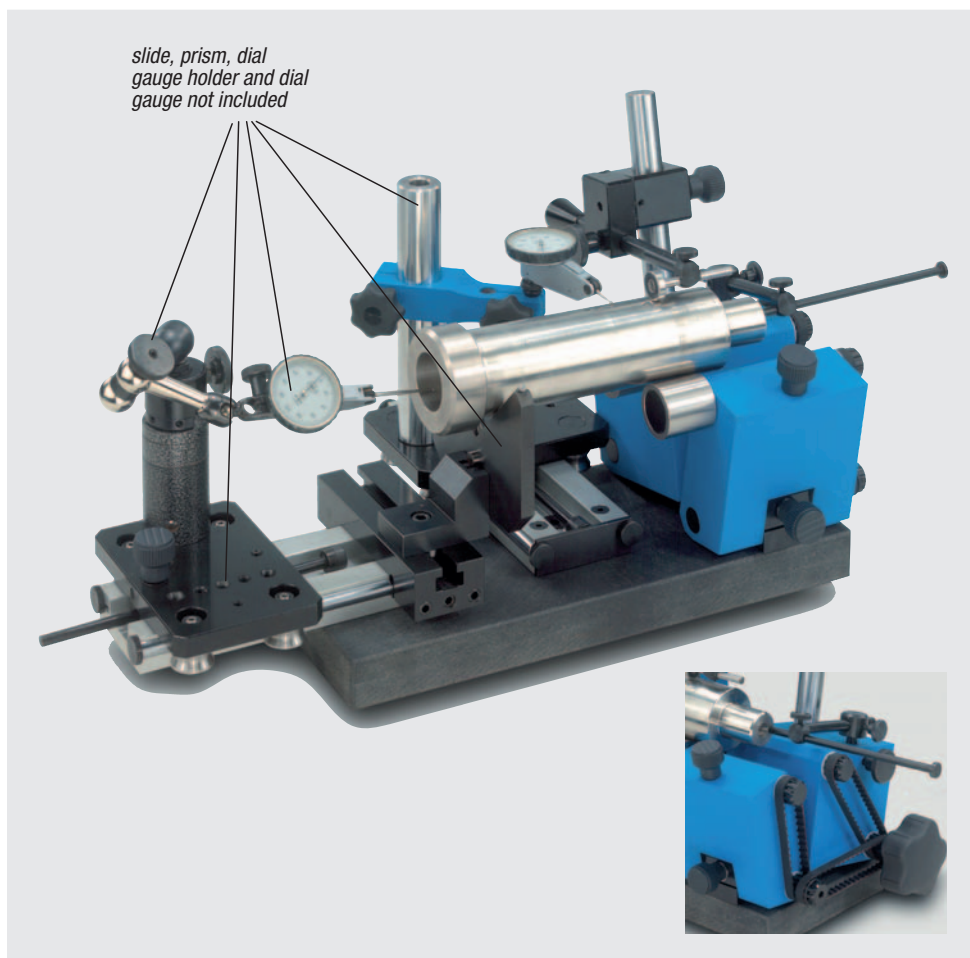

Order No.

Item

32506-01

Concentricity Gauge