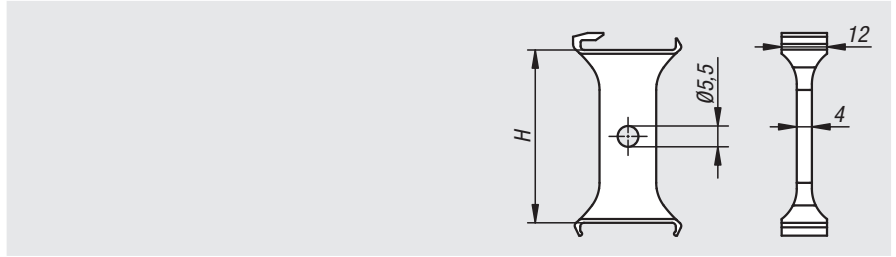


80850-92

Separator, plastic

for energy chains, inner height 45 mm

**Material:**

Polyamide fibreglass reinforced.

Version:

Black.

Sample order:

nlm 80850-92-45

Note:

Spacers to separate the cables inside the chain. The spacers can be moved within the chain link. Normally, these are fitted into every second chain link.

Temperature range:

-30°C to +125°C




Order No.	H	Suitable for
80850-92-45	45	80850-90-...

80850-93

Tension relief, plastic

for energy chains, internal height 45 mm

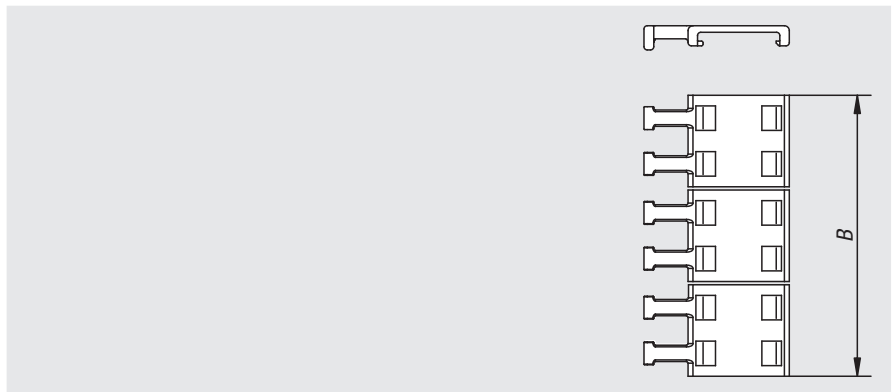**Material:**

Polyamide fibreglass reinforced.

Version:

Black.

Sample order:

nlm 80850-93-45100

Note:

The tension relief can be clipped into the connecting element. These fixate the position of the routed cables at the chain ends.

Temperature range:

-30°C to +125°C

Order No.	B	Suitable for
80850-93-45100	100	80850-90-45100...
80850-93-45150	150	80850-90-45150...
80850-93-45200	200	80850-90-45200...