

**MP COAT HOOK**


- Single, round-hole installation
- Flush pop out knob
- Corrosion-resistant materials

**Installation Notes**

Max. tightening torque on mounting nut:  
4.5 N·m (40 in·lbf)

For part numbers see page 64

**Installation**

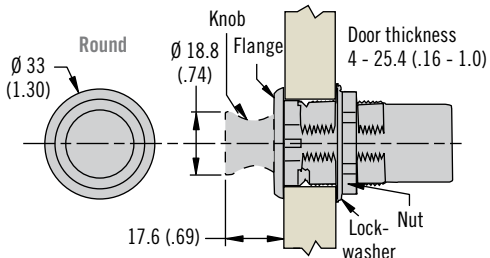


**MP PULLS**

- Stylish knob design
- Finish and flange shape flexibility
- Order knob and flange separately


MP - 06 - 1 **S** - **F**

- F** Finish
- 10 Chrome, polished
  - 20 Chrome, satin
  - 30 Nickel, brushed
  - 40 Diamond brass
  - 50 Powder coated, black
  - 60 Nickel, satin
  - 70 Powder coated, white


Knob **S** = 00 8-32 Thread  
**S** = 40 M4 Thread





Oval flange **S** = 10



Square flange **S** = 20




Round flange **S** = 30



**PULL RING**


- 316 stainless steel
- Installs flush
- Spring loaded pull ring



| Part No       | A mm        | B mm      | C mm      | D mm      |
|---------------|-------------|-----------|-----------|-----------|
| M7-90-9507480 | 83 (3-1/4") | 21 (7/8") | 12 (1/2") | 19 (3/4") |

**HATCH PULL**

- 316 stainless steel



| Part No     | A           | B          | C           | D          |
|-------------|-------------|------------|-------------|------------|
| M5-10-281-8 | 54 (2 1/8") | 3.2 (1/8") | 32 (1 1/4") | 6.3 (1/4") |

