



# 47 Captive Screws

Styled knob series · M3 thread size

- Smooth knob meets UL-1950
- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plated, chromate, plus sealer

Flare-in and Floating:

Aluminum, natural

P.C. board style: 300 Series stainless steel, passivated

Knob:

Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

Installation Notes


See pages 468-469, 543

## Notes




To ensure you receive **SOUTHCO**® quality parts, look for the segmented circle

## Recess Styles

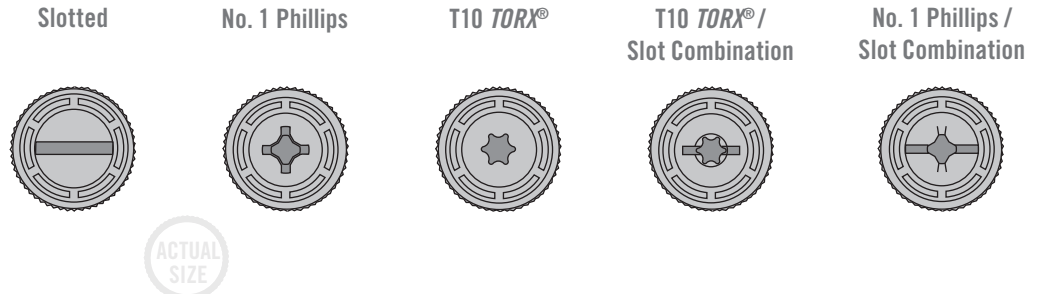


## Knob Height and Screw Projection

(Flare-in style shown)

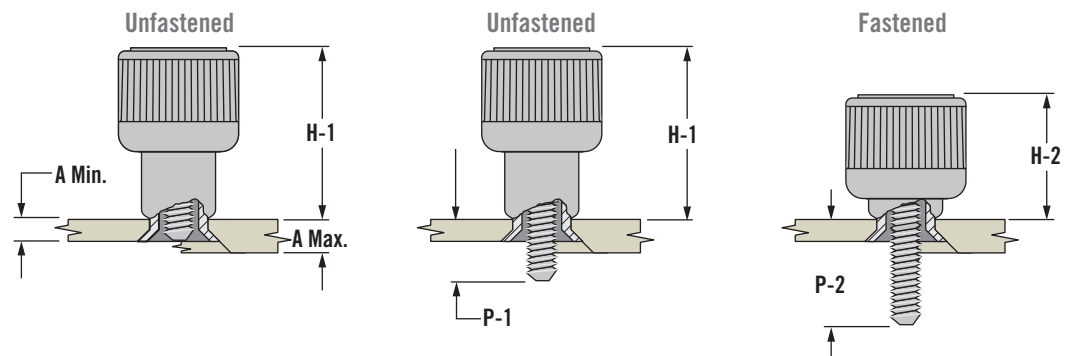

## Installation Styles

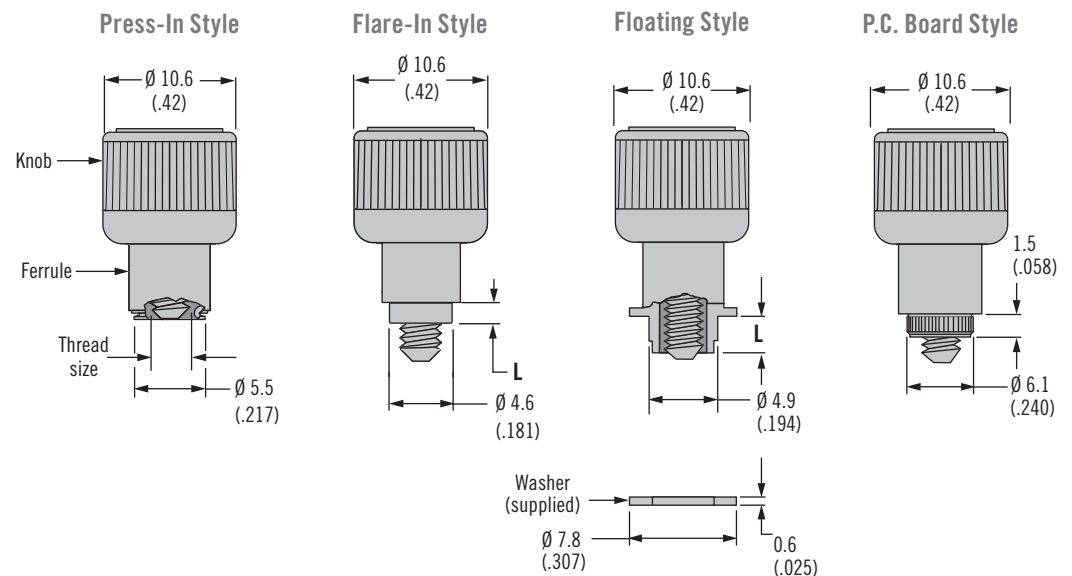

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated




[www.southco.com/47](http://www.southco.com/47)

**southco**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number				
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination
Press-In Style	11.3 (.45)	8.3 (.33)	0.9 (.036)	~	~	0.7 (.03)	~	0.8 (.03)	3.8 (.15)	47-90-101-24	47-90-121-24	47-90-141-24	47-90-161-20	47-90-181-24
								2.5 (.10)	5.5 (.22)	47-91-101-24	47-91-121-24	47-91-141-24	47-91-161-20	47-91-181-24
								4 (.16)	7 (.28)	47-92-101-24	47-92-121-24	47-92-141-24	47-92-161-20	47-92-181-24
								5.6 (.22)	8.6 (.34)	47-93-101-24	47-93-121-24	47-93-141-24	47-93-161-20	47-93-181-24
P.C. Board Style	11.5 (.45)	8.3 (.33)	1.6 (.061)	~	~	0.7 (.03)	~	1.5 (.06)	4.5 (.18)	47-95-101-34	47-95-121-34	47-95-141-34	47-95-161-30	47-95-181-34
Flare-In Style	11.5 (.45)	8.1 (.32)	0.8 (.031)	1.5 (.058)	0.4 (.015)	0.7 (.03)	1.0 (.041)	0.8 (.03)	4 (.16)	47-80-101-14	47-80-121-14	47-80-141-14	47-80-161-10	47-80-181-14
			1.5 (.059)	2.5 (.098)	0.4 (.015)		1.8 (.070)	1.5 (.06)	4.7 (.19)	47-80-102-14	47-80-122-14	47-80-142-14	47-80-162-10	47-80-182-14
			2.5 (.098)	4 (.156)	0.8 (.031)		2.6 (.104)	2.5 (.10)	5.7 (.22)	47-80-103-14	47-80-123-14	47-80-143-14	47-80-163-10	47-80-183-14
			4 (.157)	5.6 (.219)	2.4 (.093)		4.2 (.166)	4 (.16)	7.2 (.28)	47-80-105-14	47-80-125-14	47-80-145-14	47-80-165-10	47-80-185-14
			5.6 (.220)	7.1 (.281)	4 (.156)		5.8 (.299)	5.6 (.22)	8.8 (.35)	47-80-107-14	47-80-127-14	47-80-147-14	47-80-167-10	47-80-187-14
			0.8 (.031)	1.5 (.058)	0.4 (.015)		1.0 (.041)	2.5 (.10)	5.7 (.22)	47-81-101-14	47-81-121-14	47-81-141-14	47-81-161-10	47-81-181-14
			4 (.16)	7.2 (.28)	47-82-101-14		47-82-121-14	47-82-141-14	47-82-161-10	47-82-181-14				
			5.6 (.22)	8.8 (.35)	47-83-101-14		47-83-121-14	47-83-141-14	47-83-161-10	47-83-181-14				
			3.2 (.13)	6.4 (.25)	47-81-102-14		47-81-122-14	47-81-142-14	47-81-162-10	47-81-182-14				
			4.7 (.19)	7.9 (.31)	47-82-102-14		47-82-122-14	47-82-142-14	47-82-162-10	47-82-182-14				
			6.3 (.25)	9.5 (.37)	47-83-102-14		47-83-122-14	47-83-142-14	47-83-162-10	47-83-182-14				
			Floating Style	11.4 (.45)	8.6 (.34)		~	0.8 (.031)	2 (.080)	2.0 (.08)	2.6 (.101)	1.9 (.07)	5.1 (.20)	47-80-110-14
3.4 (.13)	6.6 (.26)	47-81-110-14				47-81-130-14	47-81-150-14	47-81-170-10	47-81-190-14					
5 (.19)	8.2 (.32)	47-82-110-14				47-82-130-14	47-82-150-14	47-82-170-10	47-82-190-14					
1.9 (.07)	5.1 (.20)	47-80-111-14				47-80-131-14	47-80-151-14	47-80-171-10	47-80-191-14					
3.4 (.13)	6.6 (.26)	47-81-111-14				47-81-131-14	47-81-151-14	47-81-171-10	47-81-191-14					
5 (.19)	8.2 (.32)	47-82-111-14				47-82-131-14	47-82-151-14	47-82-171-10	47-82-191-14					
3.4 (.13)	6.6 (.26)	47-80-112-14				47-80-132-14	47-80-152-14	47-80-172-10	47-80-192-14					
5 (.19)	8.2 (.32)	47-81-112-14				47-81-132-14	47-81-152-14	47-81-172-10	47-81-192-14					

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14  
47-80-102-54
- Change 2 to 6: 47-80-102-24  
47-80-102-64
- Change 3 to 7: 47-80-102-34  
47-80-102-74



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20  
47-90-161-21
- Change 4 to 5: 47-90-101-24  
47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply



# 47 Captive Screws

Styled knob series · M3.5 thread size

- Smooth knob meets UL-1950
- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
P.C. board: 300 Series stainless steel, passivated

Flare-in, floating and snap-in: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes



To ensure you receive **SOUTHCO**® quality parts, look for the segmented circle

## Recess Styles




Slotted

No. 2 Phillips

T15 TORX®


T15 TORX® /  
Slot Combination

No. 2 Phillips /  
Slot Combination




## Knob Height and Screw Projection

(Flare-in style shown)

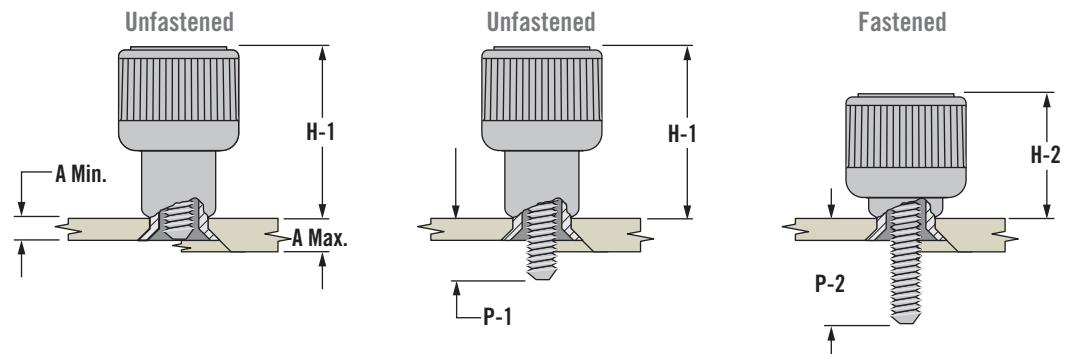

## Installation Styles

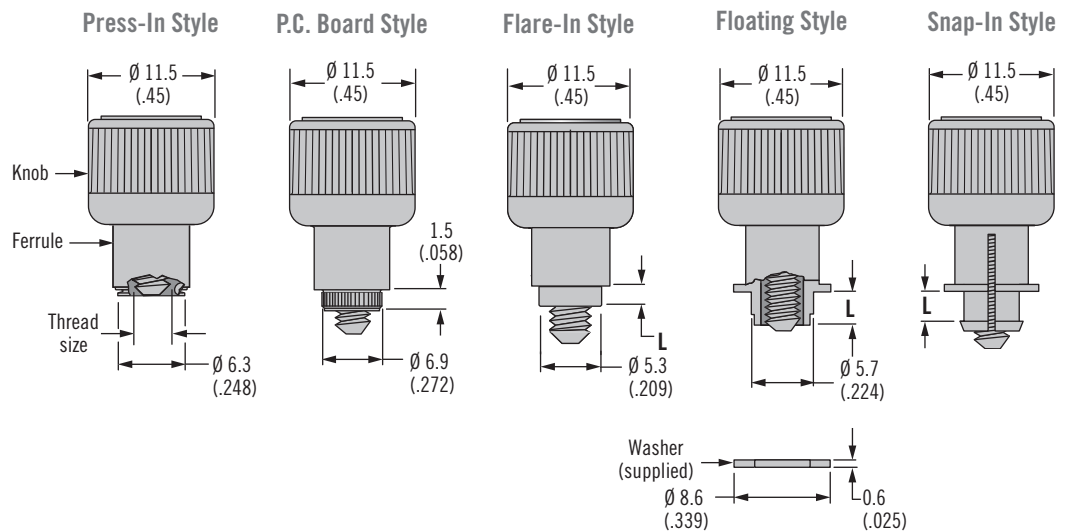

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number				
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination
Press-In Style	15.9 (.63)	11.2 (.44)	0.9 (.036)	~	~	0.8 (.03)	~	0.5 (.02)	5.3 (.21)	47-90-201-24	47-90-221-24	47-90-241-24	47-90-261-20	47-90-281-24
								2.1 (.09)	6.9 (.27)	47-91-201-24	47-91-221-24	47-91-241-24	47-91-261-20	47-91-281-24
								3.7 (.15)	8.5 (.33)	47-92-201-24	47-92-221-24	47-92-241-24	47-92-261-20	47-92-281-24
								5.3 (.21)	10.1 (.40)	47-93-201-24	47-93-221-24	47-93-241-24	47-93-261-20	47-93-281-24
P.C. Board Style	14.8 (.58)	10 (.39)	1.6 (.061)	~	~	0.8 (.03)	~	1.4 (.06)	6.2 (.24)	47-95-201-34	47-95-221-34	47-95-241-34	47-95-261-30	47-95-281-34
Flare-In Style	15.3 (.60)	10.4 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.8 (.03)	1.8 (.07)	1.1 (.04)	6 (.24)	47-80-202-14	47-80-222-14	47-80-242-14	47-80-262-10	47-80-282-14
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.7 (.11)	7.6 (.30)	47-80-204-14	47-80-224-14	47-80-244-14	47-80-264-10	47-80-284-14
			4.8 (.188)	6.4 (.250)	3.2 (.125)		5 (.197)	4.3 (.17)	9.2 (.36)	47-80-206-14	47-80-226-14	47-80-246-14	47-80-266-10	47-80-286-14
			6.4 (.252)	7.9 (.312)	4.8 (.189)		6.6 (.26)	5.9 (.23)	10.8 (.43)	47-80-208-14	47-80-228-14	47-80-248-14	47-80-268-10	47-80-288-14
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.07)	2.7 (.11)	7.6 (.30)	47-81-202-14	47-81-222-14	47-81-242-14	47-81-262-10	47-81-282-14
			3.2 (.126)	4.8 (.189)	1.6 (.062)		1.8 (.07)	4.3 (.17)	9.2 (.36)	47-82-202-14	47-82-222-14	47-82-242-14	47-82-262-10	47-82-282-14
			4.8 (.188)	6.4 (.250)	3.2 (.125)		1.8 (.07)	5.9 (.23)	10.8 (.43)	47-83-202-14	47-83-222-14	47-83-242-14	47-83-262-10	47-83-282-14
			6.4 (.252)	7.9 (.312)	4.8 (.189)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-81-204-14	47-81-224-14	47-81-244-14	47-81-264-10	47-81-284-14
			1.5 (.058)	3.2 (.125)	0.4 (.015)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-82-204-14	47-82-224-14	47-82-244-14	47-82-264-10	47-82-284-14
			3.2 (.126)	4.8 (.189)	1.6 (.062)		5 (.197)	5.9 (.23)	10.8 (.43)	47-81-206-14	47-81-226-14	47-81-246-14	47-81-266-10	47-81-286-14
Floating Style	15.4 (.60)	10.6 (.42)	~	0.8 (.031)	2.1 (.083)	2.2 (.09)	2.9 (.113)	2.4 (.09)	7.2 (.28)	47-80-210-14	47-80-230-14	47-80-250-14	47-80-270-10	47-80-290-14
			0.8 (.031)	1.6 (.063)	2.9 (.114)		2.9 (.113)	4 (.16)	8.8 (.35)	47-81-210-14	47-81-230-14	47-81-250-14	47-81-270-10	47-81-290-14
			1.6 (.063)	2.4 (.094)	3.7 (.146)		2.9 (.113)	5.6 (.22)	10.4 (.41)	47-82-210-14	47-82-230-14	47-82-250-14	47-82-270-10	47-82-290-14
			0.8 (.031)	1.6 (.063)	2.9 (.114)		3.7 (.144)	2.4 (.09)	7.2 (.28)	47-80-211-14	47-80-231-14	47-80-251-14	47-80-271-10	47-80-291-14
			1.6 (.063)	2.4 (.094)	3.7 (.146)		3.7 (.144)	4 (.16)	8.8 (.35)	47-81-211-14	47-81-231-14	47-81-251-14	47-81-271-10	47-81-291-14
			0.8 (.031)	1.6 (.063)	2.9 (.114)		3.7 (.144)	5.6 (.22)	10.4 (.41)	47-82-211-14	47-82-231-14	47-82-251-14	47-82-271-10	47-82-291-14
			1.6 (.063)	2.4 (.094)	3.7 (.146)		4.5 (.176)	4 (.16)	8.8 (.35)	47-80-212-14	47-80-232-14	47-80-252-14	47-80-272-10	47-80-292-14
			0.8 (.031)	1.6 (.063)	2.9 (.114)		4.5 (.176)	5.6 (.22)	10.4 (.41)	47-81-212-14	47-81-232-14	47-81-252-14	47-81-272-10	47-81-292-14
Snap-In Style	15.4 (.60)	10.6 (.42)	0.5 (.02)	1 (.039)	2 (.079)	0.8 (.03)	1.1 (.044)	0.8 (.03)	5.6 (.22)	47-90-210-14	47-90-230-14	47-90-250-14	47-90-270-10	47-90-290-14
			1 (.039)	1.6 (.063)	2.6 (.103)		1.1 (.044)	2.4 (.09)	7.2 (.28)	47-91-210-14	47-91-230-14	47-91-250-14	47-91-270-10	47-91-290-14
			0.5 (.02)	1 (.039)	2 (.079)		1.1 (.044)	4 (.16)	8.8 (.35)	47-92-210-14	47-92-230-14	47-92-250-14	47-92-270-10	47-92-290-14
			1 (.039)	1.6 (.063)	2.6 (.103)		1.1 (.044)	5.6 (.22)	10.4 (.41)	47-93-210-14	47-93-230-14	47-93-250-14	47-93-270-10	47-93-290-14
			0.5 (.02)	1 (.039)	2 (.079)		1.7 (.067)	2.4 (.09)	7.2 (.28)	47-90-212-14	47-90-232-14	47-90-252-14	47-90-272-10	47-90-292-14
			1 (.039)	1.6 (.063)	2.6 (.103)		1.7 (.067)	4 (.16)	8.8 (.35)	47-91-212-14	47-91-232-14	47-91-252-14	47-91-272-10	47-91-292-14
			0.5 (.02)	1 (.039)	2 (.079)		1.7 (.067)	5.6 (.22)	10.4 (.41)	47-92-212-14	47-92-232-14	47-92-252-14	47-92-272-10	47-92-292-14
			1 (.039)	1.6 (.063)	2.6 (.103)		1.7 (.067)	5.6 (.22)	10.4 (.41)	47-92-212-14	47-92-232-14	47-92-252-14	47-92-272-10	47-92-292-14
			0.5 (.02)	1 (.039)	2 (.079)		1.7 (.067)	5.6 (.22)	10.4 (.41)	47-92-212-14	47-92-232-14	47-92-252-14	47-92-272-10	47-92-292-14
			1 (.039)	1.6 (.063)	2.6 (.103)		1.7 (.067)	5.6 (.22)	10.4 (.41)	47-92-212-14	47-92-232-14	47-92-252-14	47-92-272-10	47-92-292-14

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64
- Change 3 to 7: 47-80-102-34
- 47-80-102-74



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

### Part Number

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · M4 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer

Flare-in, floating and snap-in: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes




To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

## Recess Styles




## Knob Height and Screw Projection

(Flare-in style shown)

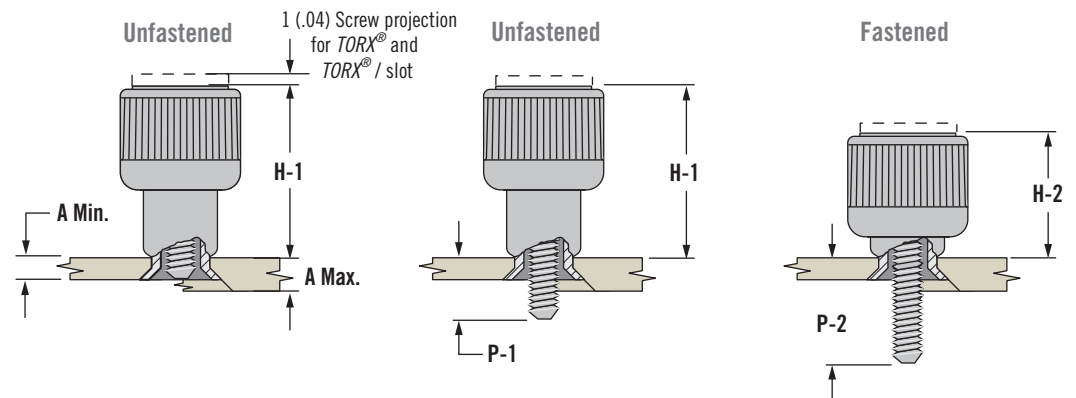

## Installation Styles

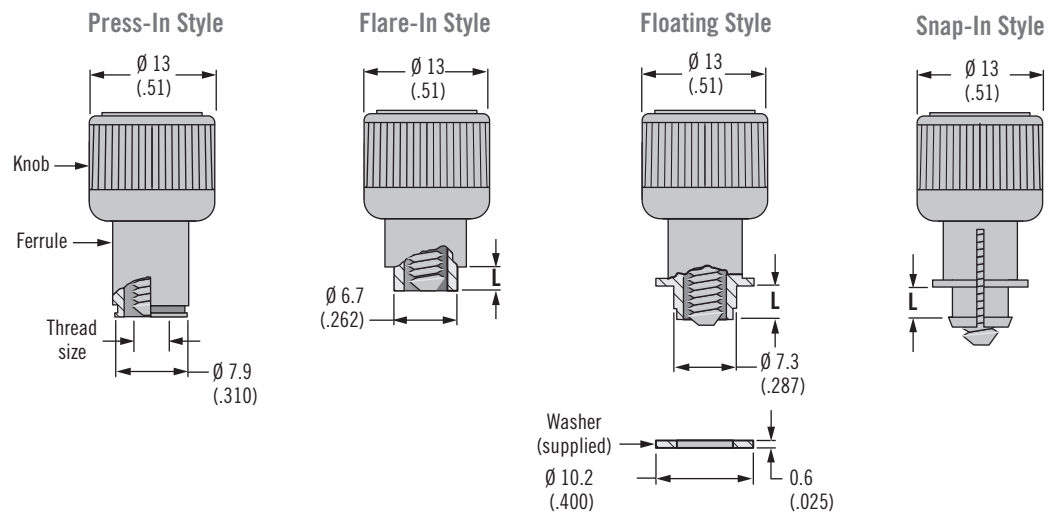

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number											
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination							
Press-In Style	16.2 (.64)	11.3 (.45)	0.9 (.036)	~	~	0.8 (.03)	~	0.6 (.02)	5.6 (.22)	47-90-301-24	47-90-321-24	47-90-341-20	47-90-361-20	47-90-381-20							
								2.2 (.09)	7.2 (.28)	47-91-301-24	47-91-321-24	47-91-341-20	47-91-361-20	47-91-381-20							
								3.8 (.15)	8.7 (.34)	47-92-301-24	47-92-321-24	47-92-341-20	47-92-361-20	47-92-381-20							
Flare-In Style	15.6 (.61)	10.5 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.9 (.03)	1.8 (.070)	1.2 (.05)	6.3 (.25)	47-80-302-14	47-80-322-14	47-80-342-10	47-80-362-10	47-80-382-10							
							3.4 (.135)	2.8 (.11)	7.9 (.31)	47-80-304-14	47-80-324-14	47-80-344-10	47-80-364-10	47-80-384-10							
							5 (.197)	4.4 (.17)	9.5 (.37)	47-80-306-14	47-80-326-14	47-80-346-10	47-80-366-10	47-80-386-10							
							6.6 (.26)	6 (.24)	11.1 (.44)	47-80-308-14	47-80-328-14	47-80-348-10	47-80-368-10	47-80-388-10							
							1.8 (.07)	2.8 (.11)	7.9 (.31)	47-81-302-14	47-81-322-14	47-81-342-10	47-81-362-10	47-81-382-10							
								4.4 (.17)	9.5 (.37)	47-82-302-14	47-82-322-14	47-82-342-10	47-82-362-10	47-82-382-10							
							3.4 (.135)	6 (.24)	11.1 (.44)	47-83-302-14	47-83-322-14	47-83-342-10	47-83-362-10	47-83-382-10							
								4.4 (.17)	9.5 (.37)	47-81-304-14	47-81-324-14	47-81-344-10	47-81-364-10	47-81-384-10							
							5 (.197)	6 (.24)	11.1 (.44)	47-82-304-14	47-82-324-14	47-82-344-10	47-82-364-10	47-82-384-10							
								6 (.24)	11.1 (.44)	47-81-306-14	47-81-326-14	47-81-346-10	47-81-366-10	47-81-386-10							
							Floating Style	16.2 (.64)	11.2 (.44)	~	0.8 (.031)	2.3 (.09)	2.3 (.09)	3.2 (.127)	2.4 (.09)	7.2 (.28)	47-80-310-14	47-80-330-14	47-80-350-10	47-80-370-10	47-80-390-10
														4 (.16)	8.8 (.35)	47-81-310-14	47-81-330-14	47-81-350-10	47-81-370-10	47-81-390-10	
5.6 (.22)	10.4 (.41)	47-82-310-14	47-82-330-14	47-82-350-10	47-82-370-10	47-82-390-10															
4 (.158)	2.4 (.09)	7.2 (.28)	47-80-311-14	47-80-331-14	47-80-351-10	47-80-371-10				47-80-391-10											
	4 (.16)	8.8 (.35)	47-81-311-14	47-81-331-14	47-81-351-10	47-81-371-10				47-81-391-10											
	5.6 (.22)	10.4 (.41)	47-82-311-14	47-82-331-14	47-82-351-10	47-82-371-10				47-82-391-10											
4.8 (.190)	4 (.16)	7.2 (.28)	47-80-312-14	47-80-332-14	47-80-352-10	47-80-372-10	47-80-392-10														
	5.6 (.22)	8.8 (.35)	47-81-312-14	47-81-332-14	47-81-352-10	47-81-372-10	47-81-392-10														
Snap-In Style	15.7 (.62)	11.2 (.44)	0.5 (.02)	1 (.039)	2 (.079)	0.9 (.03)	1.1 (.044)	1.1 (.04)	5.6 (.22)	47-90-310-14	47-90-330-14	47-90-350-10	47-90-370-10	47-90-390-10							
								2.7 (.11)	7.2 (.28)	47-91-310-14	47-91-330-14	47-91-350-10	47-91-370-10	47-91-390-10							
								4.3 (.17)	8.8 (.35)	47-93-310-14	47-92-330-14	47-92-350-10	47-92-370-10	47-92-390-10							
								5.8 (.23)	10.4 (.41)	47-93-310-14	47-93-330-14	47-93-350-10	47-93-370-10	47-93-390-10							
								1.7 (.068)	2.7 (.11)	7.2 (.28)	47-90-312-14	47-90-332-14	47-90-352-10	47-90-372-10	47-90-392-10						
									4.3 (.17)	8.8 (.35)	47-91-312-14	47-91-332-14	47-91-352-10	47-91-372-10	47-91-392-10						
			2.6 (.103)	5.9 (.23)	10.4 (.41)		47-92-312-14	47-92-332-14	47-92-352-10	47-92-372-10	47-92-392-10										
				2.7 (.11)	7.2 (.28)		47-90-314-14	47-90-334-14	47-90-354-10	47-90-374-10	47-90-394-10										
			4.3 (.17)	8.8 (.35)	47-91-314-14		47-91-334-14	47-91-354-10	47-91-374-10	47-91-394-10											
				5.9 (.23)	10.4 (.41)		47-92-314-14	47-92-334-14	47-92-354-10	47-92-374-10	47-92-394-10										

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14, 47-80-102-54
- Change 2 to 6: 47-80-102-24, 47-80-102-64



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20, 47-90-161-21
- Change 4 to 5: 47-90-101-24, 47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · M5 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer

Flare-in, floating and snap-in: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes



To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

## Recess Styles





Slotted

No. 2 Phillips

T25 TORX®


T25 TORX® /  
Slot Combination

No. 2 Phillips /  
Slot Combination



## Knob Height and Screw Projection

(Flare-in style shown)

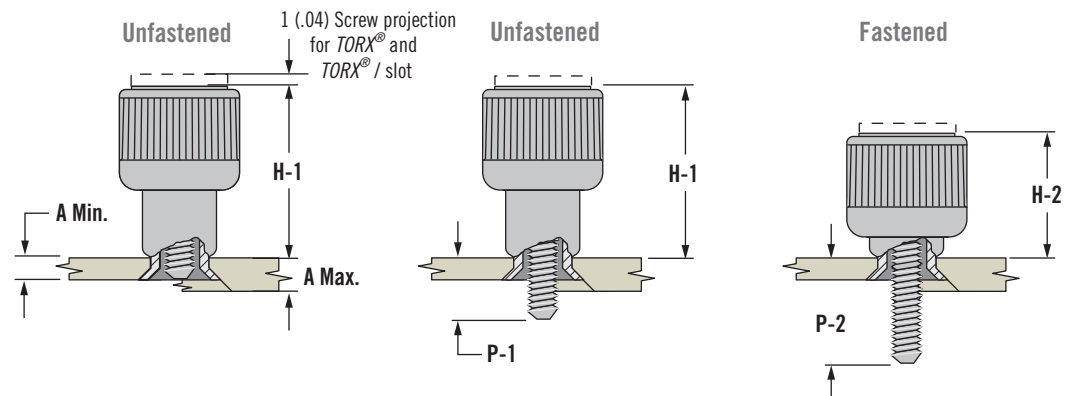


## Installation Styles

Press-In Style

Flare-In Style

Floating Style

Snap-In Style

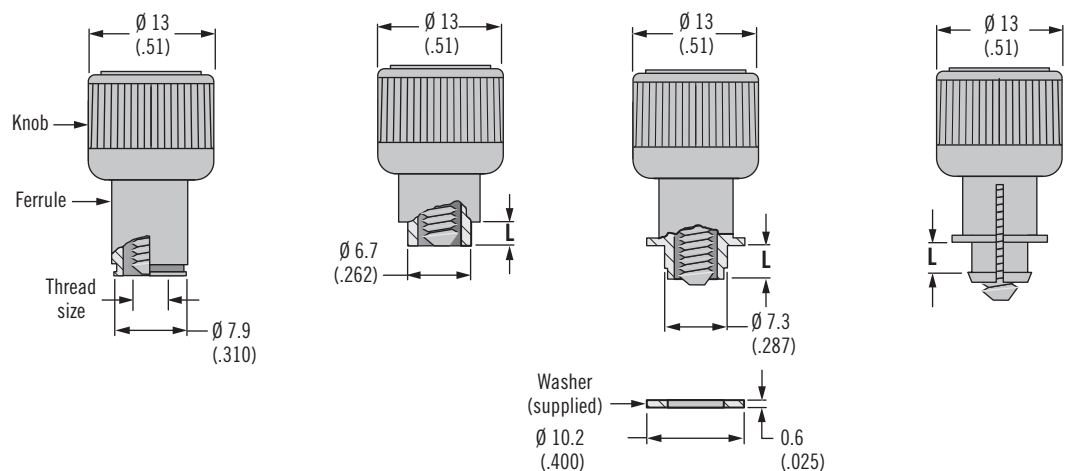

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions			Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number				
	H-1	H-2	A Min.	A Max.	B			P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination
Press-In Style	16.2 (.64)	11.3 (.45)	0.9 (.036)	~	~	0.6 (.02)	~	0.6 (.024)	5.5 (.22)	47-90-501-24	47-90-521-24	47-90-541-20	47-90-561-20	47-90-581-20
								2.2 (.087)	7.1 (.28)	47-91-501-24	47-91-521-24	47-91-541-20	47-91-561-20	47-91-581-20
								3.8 (.15)	8.7 (.34)	47-92-501-24	47-92-521-24	47-92-541-20	47-92-561-20	47-92-581-20
								5.4 (.21)	10.3 (.41)	47-93-501-24	47-93-521-24	47-93-541-20	47-93-561-20	47-93-581-20
Flare-In Style	15.6 (.61)	10.5 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.6 (.02)	1.8 (.070)	1.2 (.05)	6.3 (.25)	47-80-502-14	47-80-522-14	47-80-542-10	47-80-562-10	47-80-582-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.8 (.11)	7.9 (.31)	47-80-504-14	47-80-524-14	47-80-544-10	47-80-564-10	47-80-584-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	9.5 (.37)	47-80-506-14	47-80-526-14	47-80-546-10	47-80-566-10	47-80-586-10
			6.3 (.251)	7.9 (.312)	4.8 (.189)		6.6 (.260)	6 (.24)	11.1 (.44)	47-80-508-14	47-80-528-14	47-80-548-10	47-80-568-10	47-80-588-10
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.070)	2.8 (.11)	7.9 (.31)	47-81-502-14	47-81-522-14	47-81-542-10	47-81-562-10	47-81-582-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.4 (.17)	9.5 (.37)	47-82-502-14	47-82-522-14	47-82-542-10	47-82-562-10	47-82-582-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	9.5 (.37)	47-81-504-14	47-81-524-14	47-81-544-10	47-81-564-10	47-81-584-10
			6.3 (.251)	7.9 (.312)	4.8 (.189)		6.6 (.260)	6 (.24)	11.1 (.44)	47-82-504-14	47-82-524-14	47-82-544-10	47-82-564-10	47-82-584-10
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.070)	2.8 (.11)	7.9 (.31)	47-81-506-14	47-81-526-14	47-81-546-10	47-81-566-10	47-81-586-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.4 (.17)	9.5 (.37)	47-82-506-14	47-82-526-14	47-82-546-10	47-82-566-10	47-82-586-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	9.5 (.37)	47-81-508-14	47-81-528-14	47-81-548-10	47-81-568-10	47-81-588-10
			Floating Style	16 (.63)	11.2 (.44)		~	0.8 (.031)	2.3 (.090)	2.3 (.09)	3.2 (.127)	2.4 (.09)	7.2 (.28)	47-80-510-14
0.8 (.031)	1.6 (.063)	3.1 (.121)				4 (.158)	4 (.16)	8.8 (.35)	47-81-510-14		47-81-530-14	47-81-550-10	47-81-570-10	47-81-590-10
1.6 (.063)	2.4 (.094)	3.9 (.153)				4 (.158)	5.6 (.22)	10.4 (.41)	47-82-510-14		47-82-530-14	47-82-550-10	47-82-570-10	47-82-590-10
~	0.8 (.031)	2.3 (.090)				4 (.158)	2.4 (.09)	7.2 (.28)	47-80-511-14		47-80-531-14	47-80-551-10	47-80-571-10	47-80-591-10
0.8 (.031)	1.6 (.063)	3.1 (.121)				4 (.158)	4 (.16)	8.8 (.35)	47-81-511-14		47-81-531-14	47-81-551-10	47-81-571-10	47-81-591-10
1.6 (.063)	2.4 (.094)	3.9 (.153)				4 (.158)	5.6 (.22)	10.4 (.41)	47-82-511-14		47-82-531-14	47-82-551-10	47-82-571-10	47-82-591-10
~	0.8 (.031)	2.3 (.090)				4.8 (.190)	4 (.16)	8.8 (.35)	47-80-512-14		47-80-532-14	47-80-552-10	47-80-572-10	47-80-592-10
0.8 (.031)	1.6 (.063)	3.1 (.121)				4.8 (.190)	5.6 (.22)	10.4 (.41)	47-81-512-14		47-81-532-14	47-81-552-10	47-81-572-10	47-81-592-10
1.6 (.063)	2.4 (.094)	3.9 (.153)				4.8 (.190)	4 (.16)	8.8 (.35)	47-80-514-14		47-80-534-14	47-80-554-10	47-80-574-10	47-80-594-10
0.8 (.031)	1.6 (.063)	3.1 (.121)				4.8 (.190)	5.6 (.22)	10.4 (.41)	47-81-514-14		47-81-534-14	47-81-554-10	47-81-574-10	47-81-594-10
1.6 (.063)	2.4 (.094)	3.9 (.153)				4.8 (.190)	4 (.16)	8.8 (.35)	47-80-516-14		47-80-536-14	47-80-556-10	47-80-576-10	47-80-596-10
Snap-In Style	15.7 (.62)	11.2 (.44)				0.5 (.020)	1 (.039)	2 (.079)	.9 (.04)		1.1 (.044)	1.1 (.04)	5.6 (.22)	47-90-510-14
			0.5 (.020)	1 (.039)	2 (.079)	1.1 (.044)	2.7 (.11)	7.2 (.28)		47-91-510-14	47-91-530-14	47-91-550-10	47-91-570-10	47-91-590-10
			0.5 (.020)	1 (.039)	2 (.079)	1.1 (.044)	4.3 (.17)	8.8 (.35)		47-92-510-14	47-92-530-14	47-92-550-10	47-92-570-10	47-92-590-10
			0.5 (.020)	1 (.039)	2 (.079)	1.1 (.044)	5.9 (.23)	10.4 (.41)		47-93-510-14	47-93-530-14	47-93-550-10	47-93-570-10	47-93-590-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	2.7 (.11)	7.2 (.28)		47-90-512-14	47-90-532-14	47-90-552-10	47-90-572-10	47-90-592-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	4.3 (.17)	8.8 (.35)		47-91-512-14	47-91-532-14	47-91-552-10	47-91-572-10	47-91-592-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	5.9 (.23)	10.4 (.41)		47-92-512-14	47-92-532-14	47-92-552-10	47-92-572-10	47-92-592-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	2.7 (.11)	7.2 (.28)		47-90-514-14	47-90-534-14	47-90-554-10	47-90-574-10	47-90-594-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	4.3 (.17)	8.8 (.35)		47-91-514-14	47-91-534-14	47-91-554-10	47-91-574-10	47-91-594-10
			1 (.039)	1.6 (.063)	2.6 (.103)	1.7 (.068)	5.9 (.23)	10.4 (.41)		47-92-514-14	47-92-534-14	47-92-554-10	47-92-574-10	47-92-594-10
			1.6 (.063)	2.5 (.098)	3.5 (.138)	2.6 (.103)	2.7 (.11)	7.2 (.28)		47-90-516-14	47-90-536-14	47-90-556-10	47-90-576-10	47-90-596-10
			1.6 (.063)	2.5 (.098)	3.5 (.138)	2.6 (.103)	4.3 (.17)	8.8 (.35)		47-91-516-14	47-91-536-14	47-91-556-10	47-91-576-10	47-91-596-10

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · M6 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer

Flare-in and Floating:

Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes



To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle


## Recess Styles




ACTUAL SIZE

## Knob Height and Screw Projection

(Flare-in style shown)

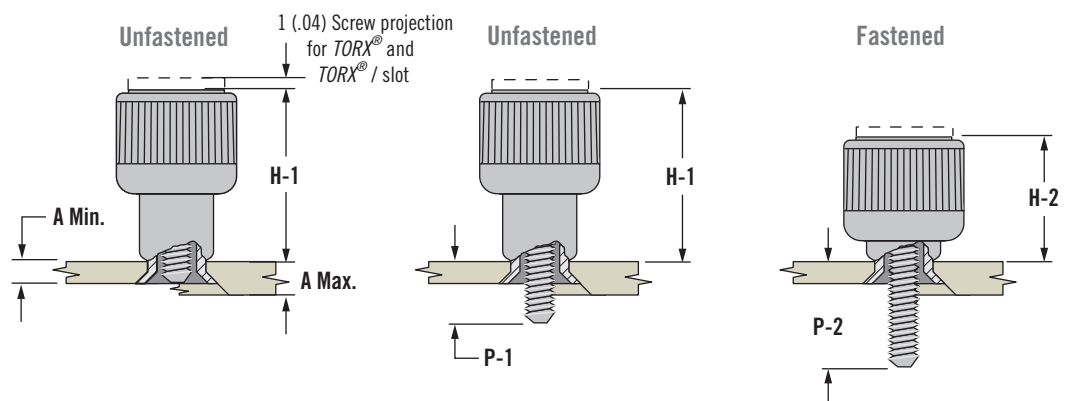

## Installation Styles

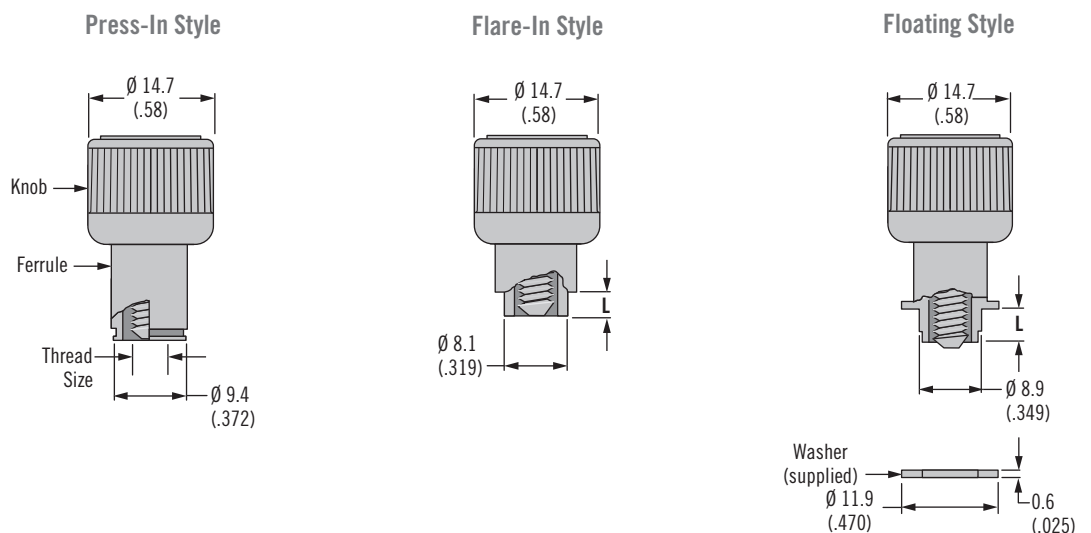

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number								
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination				
Press-In Style	20 (.79)	13.4 (.53)	0.9 (.036)	~	~	0.8 (.03)	~	0.5 (.02)	7.1 (.28)	47-90-601-24	47-90-621-24	47-90-641-20	47-90-661-20	47-90-681-20				
								2.1 (.08)	8.7 (.34)	47-91-601-24	47-91-621-24	47-91-641-20	47-91-661-20	47-91-681-20				
								3.7 (.15)	10.3 (.41)	47-92-601-24	47-92-621-24	47-92-641-20	47-92-661-20	47-92-681-20				
								5.3 (.21)	11.9 (.47)	47-93-601-24	47-93-621-24	47-93-641-20	47-93-661-20	47-93-681-20				
Flare-In Style	19.3 (.76)	12.7 (.50)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.9 (.03)	1.8 (.070)	1.2 (.05)	7.8 (.31)	47-80-602-14	47-80-622-14	47-80-642-10	47-80-662-10	47-80-682-10				
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.8 (.11)	9.4 (.31)	47-80-604-14	47-80-624-14	47-80-644-10	47-80-664-10	47-80-684-10				
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	11 (.43)	47-80-606-14	47-80-626-14	47-80-646-10	47-80-666-10	47-80-686-10				
			6.4 (.251)	7.9 (.312)	4.8 (.189)		6.6 (.260)	6 (.24)	12.6 (.50)	47-80-608-14	47-80-628-14	47-80-648-10	47-80-668-10	47-80-688-10				
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.070)	2.8 (.11)	9.4 (.37)	47-81-602-14	47-81-622-14	47-81-642-10	47-81-662-10	47-81-682-10				
			4.4 (.17)	11 (.43)	47-82-602-14			47-82-622-14	47-82-642-10	47-82-662-10	47-82-682-10							
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	6 (.24)	12.6 (.50)	47-83-602-14	47-83-622-14	47-83-642-10	47-83-662-10	47-83-682-10				
			4.4 (.17)	11 (.43)	47-81-604-14			47-81-624-14	47-81-644-10	47-81-664-10	47-81-684-10							
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	6 (.24)	12.6 (.50)	47-82-604-14	47-82-624-14	47-82-644-10	47-82-664-10	47-82-684-10				
			6 (.24)	12.6 (.50)	47-81-606-14			47-81-626-14	47-81-646-10	47-81-666-10	47-81-686-10							
			Floating Style	20 (.79)	13.3 (.52)		~	0.8 (.031)	2.5 (.097)	2.3 (.09)	3.2 (.127)	2.1 (.08)	8.8 (.35)	47-80-610-14	47-80-630-14	47-80-650-10	47-80-670-10	47-80-690-10
												3.7 (.15)	10.4 (.41)	47-81-610-14	47-81-630-14	47-81-650-10	47-81-670-10	47-81-690-10
												5.3 (.21)	12 (.47)	47-82-610-14	47-82-630-14	47-82-650-10	47-82-670-10	47-82-690-10
							4 (.158)	2.1 (.08)	8.8 (.35)		47-80-611-14	47-80-631-14	47-80-651-10	47-80-671-10	47-80-691-10			
3.7 (.15)	10.4 (.41)	47-81-611-14				47-81-631-14		47-81-651-10	47-81-671-10		47-81-691-10							
5.3 (.21)	12 (.47)	47-82-611-14				47-82-631-14		47-82-651-10	47-82-671-10		47-82-691-10							
4.8 (.189)	3.7 (.15)	10.4 (.41)				47-80-612-14	47-80-632-14	47-80-652-10	47-80-672-10		47-80-692-10							
	5.3 (.21)	12 (.47)				47-81-612-14	47-81-632-14	47-81-652-10	47-81-672-10		47-81-692-10							

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

### Part Number

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · 4-40 thread size

- Smooth knob meets UL-1950
- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
P.C. board style:

300 Series stainless steel

Flare-in and Floating:

Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes


See pages 468-469, 543

## Notes




To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

## Recess Styles

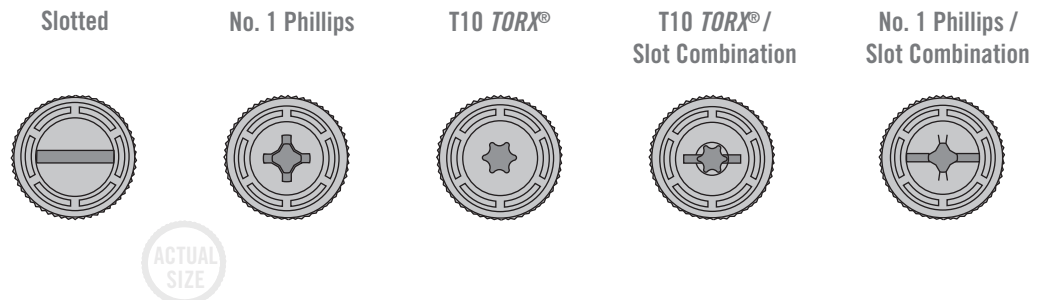


## Knob Height and Screw Projection

(Flare-in style shown)

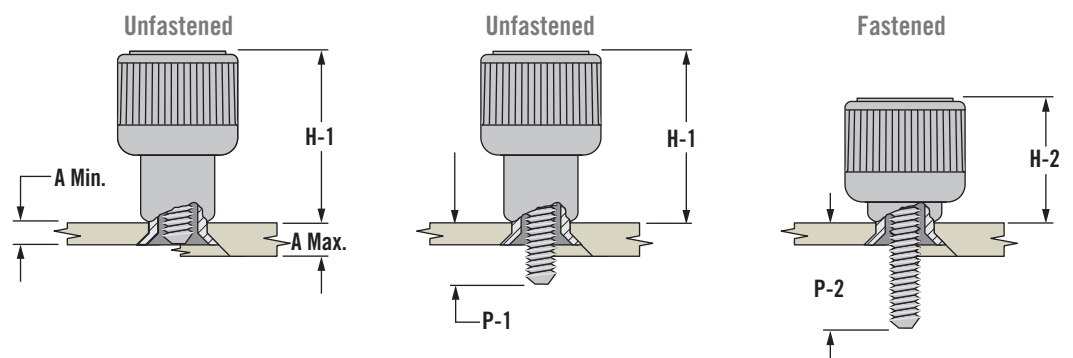

## Installation Styles

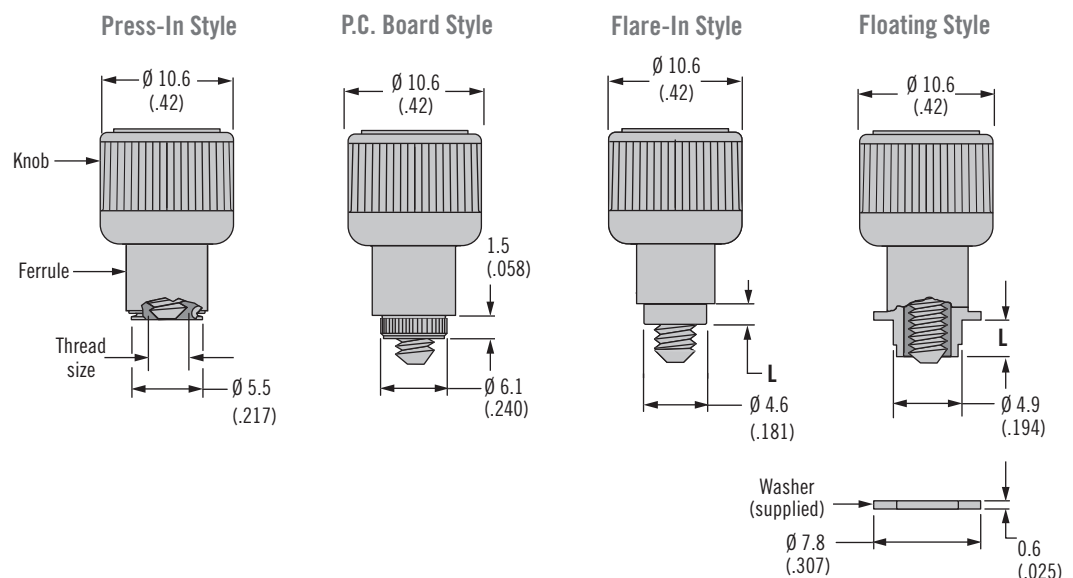

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number				
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination
Press-In Style	11.3 (.45)	8.3 (.33)	0.9 (.036)	~	~	0.8 (.03)	~	0.8 (.03)	3.8 (.15)	47-60-101-24	47-60-121-24	47-60-141-24	47-60-161-20	47-60-181-24
								2.5 (.10)	5.5 (.22)	47-61-101-24	47-61-121-24	47-61-141-24	47-61-161-20	47-61-181-24
								4 (.16)	7 (.28)	47-62-101-24	47-62-121-24	47-62-141-24	47-62-161-20	47-62-181-24
								5.6 (.22)	8.6 (.34)	47-63-101-24	47-63-121-24	47-63-141-24	47-63-161-20	47-63-181-24
P.C. Board Style	11.5 (.45)	8.3 (.33)	1.6 (.061)	~	~	0.8 (.03)	~	1.5 (.06)	4.5 (.18)	47-65-101-34	47-65-121-34	47-65-141-34	47-65-161-30	47-65-181-34
Flare-In Style	11.5 (.45)	8.1 (.32)	0.8 (.031)	1.5 (.058)	0.4 (.015)	0.6 (.03)	1 (.041)	0.8 (.03)	4 (.16)	47-10-101-14	47-10-121-14	47-10-141-14	47-10-161-10	47-10-181-14
			1.5 (.059)	2.5 (.100)	0.4 (.015)		1.8 (.070)	1.5 (.06)	4.7 (.19)	47-10-102-14	47-10-122-14	47-10-142-14	47-10-162-10	47-10-182-14
			2.5 (.1)	4 (.156)	0.8 (.031)		2.6 (.104)	2.5 (.10)	5.7 (.22)	47-10-103-14	47-10-123-14	47-10-143-14	47-10-163-10	47-10-183-14
			4 (.157)	5.6 (.219)	2.4 (.093)		4.2 (.166)	4 (.16)	7.2 (.28)	47-10-105-14	47-10-125-14	47-10-145-14	47-10-165-10	47-10-185-14
			5.6 (.220)	7.1 (.281)	4 (.156)		5.8 (.229)	5.6 (.22)	8.8 (.35)	47-10-107-14	47-10-127-14	47-10-147-14	47-10-167-10	47-10-187-14
			0.8 (.031)	1.5 (.058)	0.4 (.015)		1 (.041)	2.5 (.10)	5.7 (.22)	47-11-101-14	47-11-121-14	47-11-141-14	47-11-161-10	47-11-181-14
			4 (.16)	7.2 (.28)	47-12-101-14			47-12-121-14	47-12-141-14	47-12-161-10	47-12-181-14			
			5.6 (.22)	8.8 (.35)	47-13-101-14			47-13-121-14	47-13-141-14	47-13-161-10	47-13-181-14			
			1.8 (.070)	3.2 (.13)	6.4 (.25)		47-11-102-14	47-11-122-14	47-11-142-14	47-11-162-10	47-11-182-14			
				4.7 (.19)	7.9 (.31)		47-12-102-14	47-12-122-14	47-12-142-14	47-12-162-10	47-12-182-14			
				6.3 (.25)	9.5 (.37)		47-13-102-14	47-13-122-14	47-13-142-14	47-13-162-10	47-13-182-14			
			Floating Style	11.4 (.45)	8.6 (.34)		~	0.8 (.031)	2 (.080)	2.1 (.08)	2.6 (.101)	1.9 (.07)	5.1 (.20)	47-10-110-14
3.4 (.13)	6.6 (.26)	47-11-110-14				47-11-130-14		47-11-150-14	47-11-170-10		47-11-190-14			
5 (.19)	8.2 (.32)	47-12-110-14				47-12-130-14		47-12-150-14	47-12-170-10		47-12-190-14			
0.8 (.031)	1.6 (.063)	2.8 (.111)				3.4 (.132)	1.9 (.07)	5.1 (.20)	47-10-111-14		47-10-131-14	47-10-151-14	47-10-171-10	47-10-191-14
3.4 (.13)	6.6 (.26)	47-11-111-14				47-11-131-14	47-11-151-14	47-11-171-10	47-11-191-14					
5 (.19)	8.2 (.32)	47-12-111-14				47-12-131-14	47-12-151-14	47-12-171-10	47-12-191-14					
1.6 (.063)	2.4 (.094)	3.6 (.143)				4.2 (.164)	3.4 (.13)	6.6 (.26)	47-10-112-14		47-10-132-14	47-10-152-14	47-10-172-10	47-10-192-14
5 (.19)	8.2 (.32)	47-11-112-14				47-11-132-14	47-11-152-14	47-11-172-10	47-11-192-14					

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64
- Change 3 to 7: 47-80-102-34
- 47-80-102-74



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · 6-32 thread size

- Smooth knob meets UL-1950
- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

### Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
 P.C. board style: 300 Series stainless steel, passivated  
 Flare-in, floating and snap-in:

Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

### Installation Notes


See pages 468-469, 543

### Notes




To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

### Recess Styles

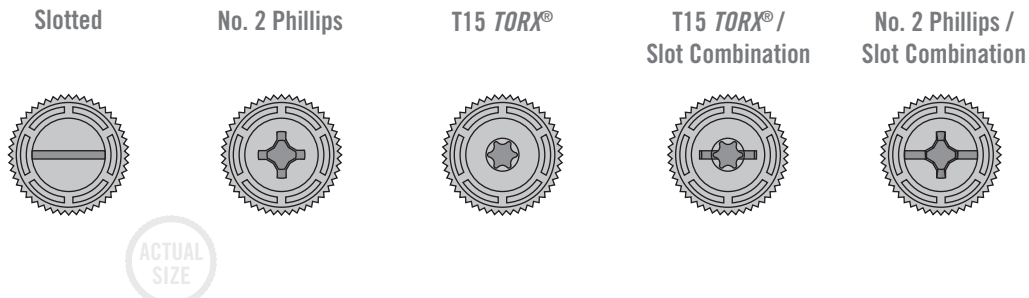


### Knob Height and Screw Projection

(Flare-in style shown)

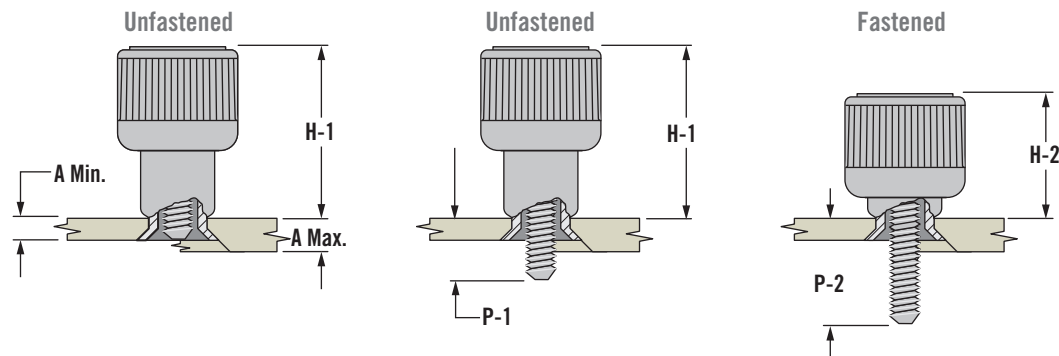

### Installation Styles

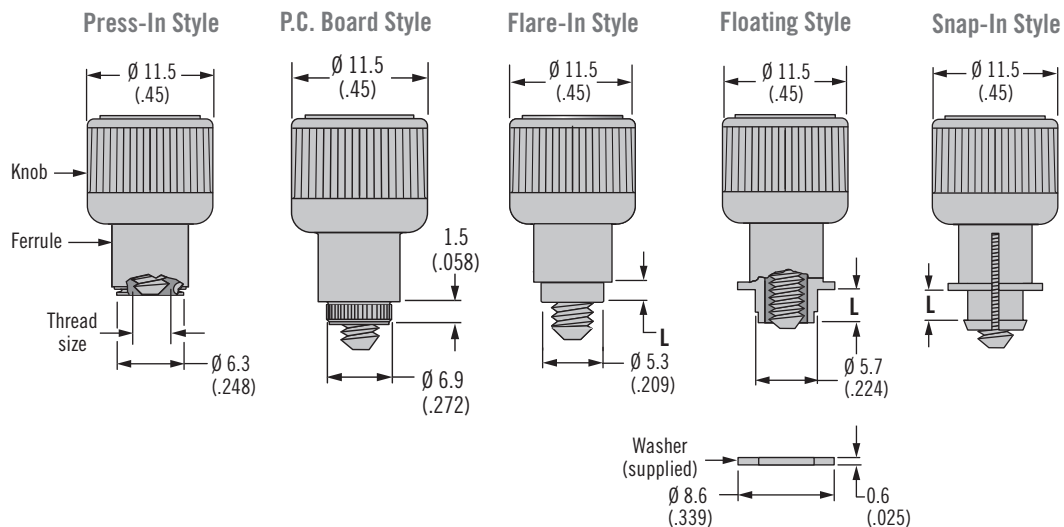

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)



Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number									
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination					
Press-In Style	15.9 (.63)	11.2 (.44)	0.9 (.036)	~	~	0.8 (.03)	~	0.5 (.02)	5.3 (.21)	47-60-201-24	47-60-221-24	47-60-241-24	47-60-261-20	47-60-281-24					
								2.1 (.08)	6.9 (.27)	47-61-201-24	47-61-221-24	47-61-241-24	47-61-261-20	47-61-281-24					
								3.7 (.15)	8.5 (.33)	47-62-201-24	47-62-221-24	47-62-241-24	47-62-261-20	47-62-281-24					
								5.3 (.21)	10.1 (.40)	47-63-201-24	47-63-221-24	47-63-241-24	47-63-261-20	47-63-281-24					
P.C. Board Style	14.8 (.58)	10 (.39)	1.6 (.061)	~	~	0.8 (.03)	~	1.4 (.06)	6.1 (.24)	47-65-201-34	47-65-221-34	47-65-241-34	47-65-261-30	47-65-281-34					
Flare-In Style	15.3 (.60)	10.4 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.8 (.03)	1.8 (.07)	1.1 (.04)	6 (.24)	47-10-202-14	47-10-222-14	47-10-242-14	47-10-262-10	47-10-282-14					
			3.2 (.125)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.7 (.11)	7.6 (.30)	47-10-204-14	47-10-224-14	47-10-244-14	47-10-264-10	47-10-284-14					
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.3 (.17)	9.2 (.36)	47-10-206-14	47-10-226-14	47-10-246-14	47-10-266-10	47-10-286-14					
			6.4 (.250)	7.9 (.312)	4.8 (.189)		6.1 (.26)	5.9 (.23)	10.8 (.43)	47-10-208-14	47-10-228-14	47-10-248-14	47-10-268-10	47-10-288-14					
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.07)	2.7 (.11)	7.6 (.30)	47-11-202-14	47-11-222-14	47-11-242-14	47-11-262-10	47-11-282-14					
			3.2 (.125)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-12-202-14	47-12-222-14	47-12-242-14	47-12-262-10	47-12-282-14					
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	5.9 (.23)	10.8 (.43)	47-13-202-14	47-13-222-14	47-13-242-14	47-13-262-10	47-13-282-14					
			6.4 (.250)	7.9 (.312)	4.8 (.189)		6.1 (.26)	5.9 (.23)	10.8 (.43)	47-12-204-14	47-12-224-14	47-12-244-14	47-12-264-10	47-12-284-14					
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.07)	2.7 (.11)	7.6 (.30)	47-11-204-14	47-11-224-14	47-11-244-14	47-11-264-10	47-11-284-14					
			3.2 (.125)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-12-204-14	47-12-224-14	47-12-244-14	47-12-264-10	47-12-284-14					
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	5.9 (.23)	10.8 (.43)	47-11-206-14	47-11-226-14	47-11-246-14	47-11-266-10	47-11-286-14					
			Floating Style	15.3 (.60)	10.6 (.42)		~	0.8 (.031)	2.1 (.083)	2.2 (.09)	2.9 (.113)	2.4 (.09)	7.2 (.28)	47-10-210-14	47-10-230-14	47-10-250-14	47-10-270-10	47-10-290-14	
0.8 (.031)	1.6 (.063)	2.9 (.114)				4 (.16)	8.8 (.35)	47-11-210-14	47-11-230-14		47-11-250-14	47-11-270-10	47-11-290-14						
1.6 (.063)	2.4 (.094)	3.7 (.146)				5.6 (.22)	10.4 (.41)	47-12-210-14	47-12-230-14		47-12-250-14	47-12-270-10	47-12-290-14						
2.4 (.094)	3.7 (.146)	4.5 (.176)				2.4 (.09)	7.2 (.28)	47-10-211-14	47-10-231-14		47-10-251-14	47-10-271-10	47-10-291-14						
~	0.8 (.031)	2.1 (.083)				4 (.16)	8.8 (.35)	47-11-211-14	47-11-231-14		47-11-251-14	47-11-271-10	47-11-291-14						
0.8 (.031)	1.6 (.063)	2.9 (.114)				5.6 (.22)	10.4 (.41)	47-12-211-14	47-12-231-14		47-12-251-14	47-12-271-10	47-12-291-14						
1.6 (.063)	2.4 (.094)	3.7 (.146)				4 (.16)	8.8 (.35)	47-10-212-14	47-10-232-14		47-10-252-14	47-10-272-10	47-10-292-14						
~	0.8 (.031)	2.1 (.083)				5.6 (.22)	10.4 (.41)	47-11-212-14	47-11-232-14		47-11-252-14	47-11-272-10	47-11-292-14						
Snap-In Style	15.3 (.60)	10.6 (.42)	0.5 (.020)	1 (.039)	2 (.079)	0.8 (.03)	1.1 (.044)	0.8 (.03)	5.6 (.22)	47-60-210-14	47-60-230-14	47-60-250-14	47-60-270-10	47-60-290-14					
			1 (.039)	1.6 (.063)	2.6 (.103)		2.4 (.09)	7.2 (.28)	47-61-210-14	47-61-230-14	47-61-250-14	47-61-270-10	47-61-290-14						
			~	0.5 (.020)	1 (.039)		2 (.079)	4 (.16)	8.8 (.35)	47-62-210-14	47-62-230-14	47-62-250-14	47-62-270-10	47-62-290-14					
			0.5 (.020)	1 (.039)	2 (.079)		5.6 (.22)	10.4 (.41)	47-63-210-14	47-63-230-14	47-63-250-14	47-63-270-10	47-63-290-14						
			~	0.5 (.020)	1 (.039)		2 (.079)	2.4 (.09)	7.2 (.28)	47-60-212-14	47-60-232-14	47-60-252-14	47-60-272-10	47-60-292-14					
			0.5 (.020)	1 (.039)	2 (.079)		4 (.16)	8.8 (.35)	47-61-212-14	47-61-232-14	47-61-252-14	47-61-272-10	47-61-292-14						
			~	0.5 (.020)	1 (.039)		2 (.079)	5.6 (.22)	10.4 (.41)	47-62-212-14	47-62-232-14	47-62-252-14	47-62-272-10	47-62-292-14					
			0.5 (.020)	1 (.039)	2 (.079)		~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	
			~	0.5 (.020)	1 (.039)		2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)
			~	0.5 (.020)	1 (.039)		2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)	~	0.5 (.020)	1 (.039)	2 (.079)

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14  
47-80-102-54
- Change 2 to 6: 47-80-102-24  
47-80-102-64
- Change 3 to 7: 47-80-102-34  
47-80-102-74



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20  
47-90-161-21
- Change 4 to 5: 47-90-101-24  
47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





# 47 Captive Screws

Styled knob series · 8-32 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer

Flare-in, floating and snap-in: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes


See pages 468-469, 543

## Notes




To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

## Recess Styles

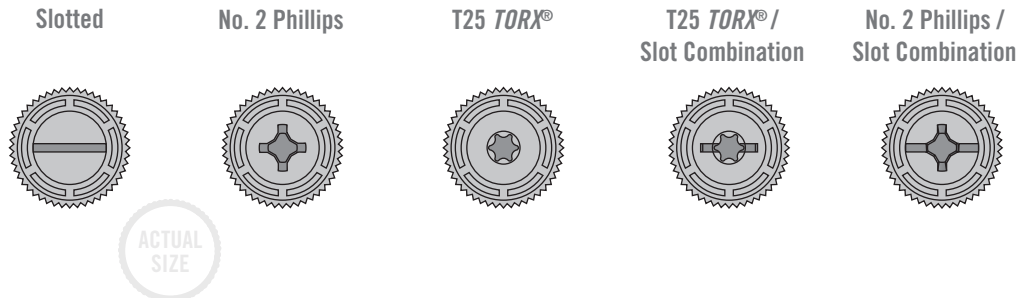


## Knob Height and Screw Projection

(Flare-in style shown)

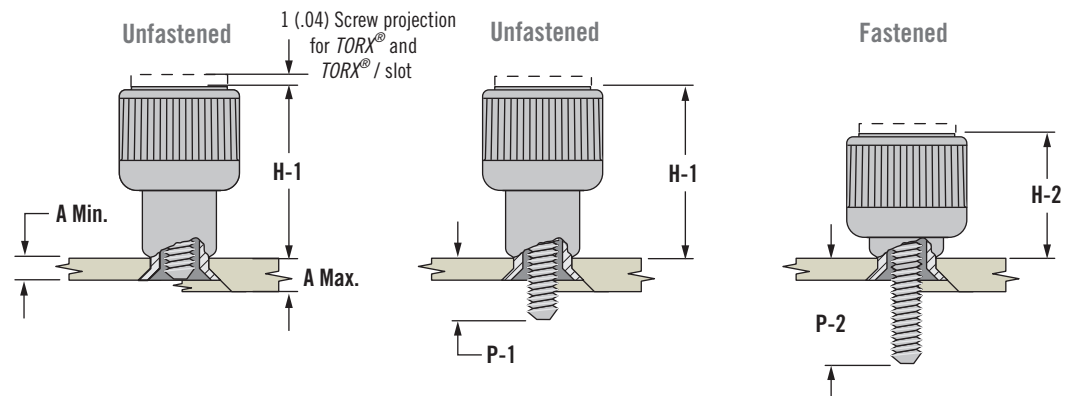

## Installation Styles

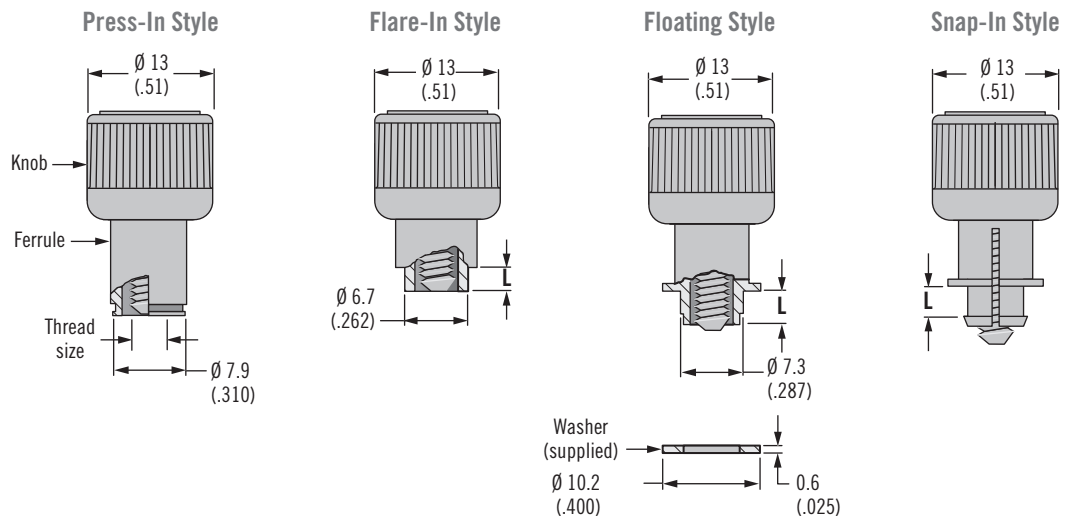

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number				
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination
Press-In Style	16.2 (.64)	11.2 (.44)	0.9 (.036)	~	~	0.8 (.03)	~	0.5 (.02)	5.6 (.22)	47-60-301-24	47-60-321-24	47-60-341-20	47-60-361-20	47-60-381-20
								2 (.08)	7.1 (.28)	47-61-301-24	47-61-321-24	47-61-341-20	47-61-361-20	47-61-381-20
								3.8 (.15)	8.9 (.35)	47-62-301-24	47-62-321-24	47-62-341-20	47-62-361-20	47-62-381-20
								5.3 (.21)	10.4 (.41)	47-63-301-24	47-63-321-24	47-63-341-20	47-63-361-20	47-63-381-20
Flare-In Style	15.6 (.61)	10.5 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.9 (.03)	1.8 (.070)	1 (.04)	6 (.24)	47-10-302-14	47-10-322-14	47-10-342-10	47-10-362-10	47-10-382-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.8 (.11)	7.6 (.3)	47-10-304-14	47-10-324-14	47-10-344-10	47-10-364-10	47-10-384-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.3 (.17)	9.2 (.36)	47-10-306-14	47-10-326-14	47-10-346-10	47-10-366-10	47-10-386-10
			6.3 (.251)	7.9 (.312)	4.8 (.189)		6.6 (.260)	5.8 (.23)	10.8 (.43)	47-10-308-14	47-10-328-14	47-10-348-10	47-10-368-10	47-10-388-10
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.07)	2.8 (.11)	7.6 (.3)	47-11-302-14	47-11-322-14	47-11-342-10	47-11-362-10	47-11-382-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-12-302-14	47-12-322-14	47-12-342-10	47-12-362-10	47-12-382-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	5.8 (.23)	10.8 (.43)	47-13-302-14	47-13-322-14	47-13-342-10	47-13-362-10	47-13-382-10
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.3 (.17)	9.2 (.36)	47-11-304-14	47-11-324-14	47-11-344-10	47-11-364-10	47-11-384-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	5.8 (.23)	10.8 (.43)	47-12-304-14	47-12-324-14	47-12-344-10	47-12-364-10	47-12-384-10
			2.3 (.09)	7.1 (.28)	47-11-306-14		47-11-326-14	47-11-346-10	47-11-366-10	47-11-386-10				
			2.3 (.09)	7.1 (.28)	47-10-310-14		47-10-330-14	47-10-350-10	47-10-370-10	47-10-390-10				
			3.8 (.15)	8.9 (.35)	47-11-310-14		47-11-330-14	47-11-350-10	47-11-370-10	47-11-390-10				
5.6 (.22)	10.4 (.41)	47-12-310-14	47-12-330-14	47-12-350-10	47-12-370-10	47-12-390-10								
2.3 (.09)	7.1 (.28)	47-10-311-14	47-10-331-14	47-10-351-10	47-10-371-10	47-10-391-10								
3.8 (.15)	8.9 (.35)	47-11-311-14	47-11-331-14	47-11-351-10	47-11-371-10	47-11-391-10								
5.6 (.22)	10.4 (.41)	47-12-311-14	47-12-331-14	47-12-351-10	47-12-371-10	47-12-391-10								
3.8 (.15)	8.9 (.35)	47-10-312-14	47-10-332-14	47-10-352-10	47-10-372-10	47-10-392-10								
5.6 (.22)	10.4 (.41)	47-11-312-14	47-11-332-14	47-11-352-10	47-11-372-10	47-11-392-10								
1 (.04)	3 (.22)	47-60-310-14	47-60-330-14	47-60-350-10	47-60-370-10	47-60-390-10								
2.8 (.11)	7.1 (.28)	47-61-310-14	47-61-330-14	47-61-350-10	47-61-370-10	47-61-390-10								
4.3 (.17)	8.9 (.35)	47-63-310-14	47-63-330-14	47-63-350-10	47-63-370-10	47-63-390-10								
5.8 (.23)	10.4 (.41)	47-63-310-14	47-63-330-14	47-63-350-10	47-63-370-10	47-63-390-10								
2.8 (.11)	7.1 (.28)	47-60-312-14	47-60-332-14	47-60-352-10	47-60-372-10	47-60-392-10								
4.3 (.17)	8.9 (.35)	47-61-312-14	47-61-332-14	47-61-352-10	47-61-372-10	47-61-392-10								
5.8 (.23)	10.4 (.41)	47-62-312-14	47-62-332-14	47-62-352-10	47-62-372-10	47-62-392-10								
2.8 (.11)	7.1 (.28)	47-60-314-14	47-60-334-14	47-60-354-10	47-60-374-10	47-60-394-10								
4.3 (.17)	8.9 (.35)	47-61-314-14	47-61-334-14	47-61-354-10	47-61-374-10	47-61-394-10								
5.8 (.23)	10.4 (.41)	47-62-314-14	47-62-334-14	47-62-354-10	47-62-374-10	47-62-394-10								

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

**Part Number**

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply







# 47 Captive Screws

Styled knob series · 10-32 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer

Flare-in, floating and snap-in: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes



To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle

## Recess Styles





Slotted

No. 2 Phillips

T25 TORX®


T25 TORX® /  
Slot Combination

No. 2 Phillips /  
Slot Combination




## Knob Height and Screw Projection

(Flare-in style shown)

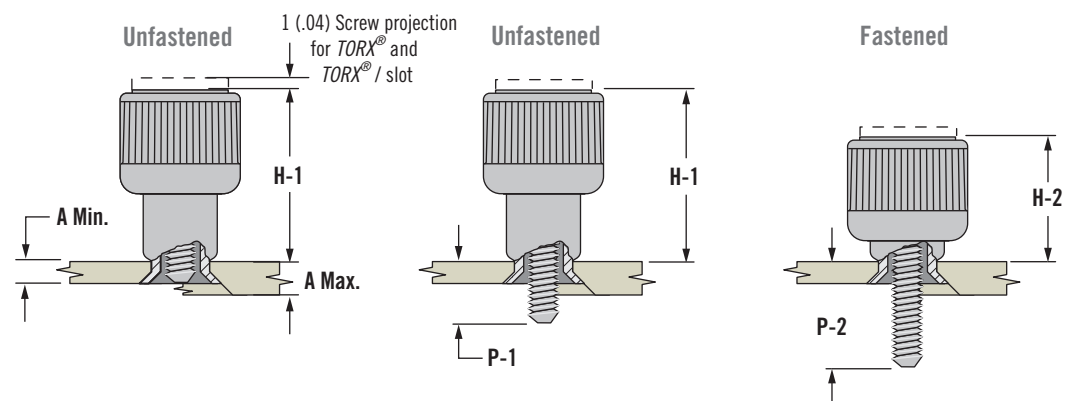

## Installation Styles

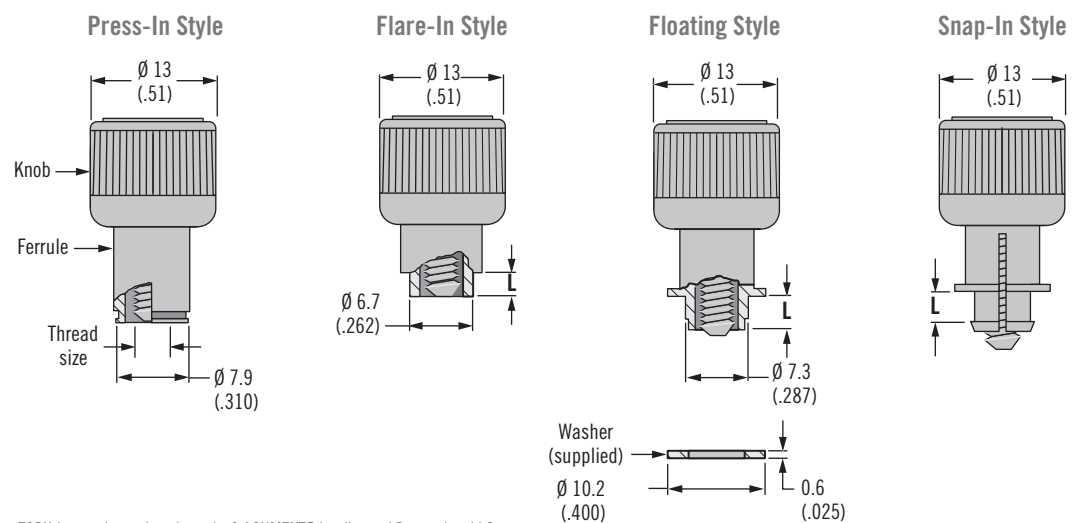

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number						
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination		
Press-In Style	16.2 (.64)	11.2 (.44)	0.9 (.036)	~	~	0.6 (.02)	~	0.6 (.02)	5.5 (.22)	47-60-501-24	47-60-521-24	47-60-541-20	47-60-561-20	47-60-581-20		
								2.2 (.09)	7.2 (.28)	47-61-501-24	47-61-521-24	47-61-541-20	47-61-561-20	47-61-581-20		
								3.8 (.15)	8.9 (.35)	47-62-501-24	47-62-521-24	47-62-541-20	47-62-561-20	47-62-581-20		
								5.4 (.21)	10.3 (.41)	47-63-501-24	47-63-521-24	47-63-541-20	47-63-561-20	47-63-581-20		
Flare-In Style	15.6 (.61)	10.5 (.41)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.6 (.02)	1.8 (.070)	1.2 (.05)	6.3 (.25)	47-10-502-14	47-10-522-14	47-10-542-10	47-10-562-10	47-10-582-10		
			3.2 (.125)	4.7 (.187)	1.6 (.062)		3.4 (.135)	2.8 (.11)	7.9 (.31)	47-10-504-14	47-10-524-14	47-10-544-10	47-10-564-10	47-10-584-10		
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	9.5 (.37)	47-10-506-14	47-10-526-14	47-10-546-10	47-10-566-10	47-10-586-10		
			6.3 (.251)	7.9 (.312)	4.8 (.187)		6.6 (.260)	6 (.24)	11.1 (.44)	47-10-508-14	47-10-528-14	47-10-548-10	47-10-568-10	47-10-588-10		
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.070)	2.8 (.11)	7.9 (.31)	47-11-502-14	47-11-522-14	47-11-542-10	47-11-562-10	47-11-582-10		
			3.2 (.125)	4.8 (.187)	1.6 (.062)		1.8 (.070)	4.4 (.17)	9.5 (.37)	47-12-502-14	47-12-522-14	47-12-542-10	47-12-562-10	47-12-582-10		
			4.8 (.189)	6.4 (.250)	3.2 (.125)		3.4 (.135)	4.4 (.17)	9.5 (.37)	47-11-504-14	47-11-524-14	47-11-544-10	47-11-564-10	47-11-584-10		
			6.3 (.251)	7.9 (.312)	4.8 (.187)		3.4 (.135)	6 (.24)	11.1 (.44)	47-12-504-14	47-12-524-14	47-12-544-10	47-12-564-10	47-12-584-10		
			1.5 (.058)	3.2 (.125)	0.4 (.015)		5 (.197)	6 (.24)	11.1 (.44)	47-11-506-14	47-11-526-14	47-11-546-10	47-11-566-10	47-11-586-10		
			3.2 (.125)	4.8 (.187)	1.6 (.062)		3.2 (.125)	2.3 (.09)	3.2 (.127)	2.3 (.09)	7.1 (.28)	47-10-510-14	47-10-530-14	47-10-550-10	47-10-570-10	47-10-590-10
			4.8 (.189)	6.4 (.250)	3.2 (.125)		2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-11-510-14	47-11-530-14	47-11-550-10	47-11-570-10	47-11-590-10
			6.3 (.251)	7.9 (.312)	4.8 (.187)		2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-12-510-14	47-12-530-14	47-12-550-10	47-12-570-10	47-12-590-10
8.9 (.35)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	2.4 (.09)	7.1 (.28)	47-10-511-14	47-10-531-14	47-10-551-10	47-10-571-10	47-10-591-10				
10.3 (.41)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-11-511-14	47-11-531-14	47-11-551-10	47-11-571-10	47-11-591-10				
11.7 (.46)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-12-511-14	47-12-531-14	47-12-551-10	47-12-571-10	47-12-591-10				
13.1 (.51)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
14.5 (.57)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
15.9 (.63)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
17.3 (.68)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
18.7 (.74)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
20.1 (.80)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
21.5 (.85)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
22.9 (.91)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
24.3 (.96)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
25.7 (1.02)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
27.1 (1.07)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
28.5 (1.13)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
29.9 (1.18)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
31.3 (1.24)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
32.7 (1.29)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
34.1 (1.34)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
35.5 (1.40)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
36.9 (1.45)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
38.3 (1.51)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
39.7 (1.56)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
41.1 (1.62)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
42.5 (1.67)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
43.9 (1.73)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
45.3 (1.78)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
46.7 (1.84)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
48.1 (1.89)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
49.5 (1.95)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
50.9 (2.01)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
52.3 (2.07)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
53.7 (2.13)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
55.1 (2.18)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
56.5 (2.24)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
57.9 (2.30)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
59.3 (2.35)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
60.7 (2.41)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
62.1 (2.46)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
63.5 (2.52)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
64.9 (2.57)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
66.3 (2.63)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
67.7 (2.68)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
69.1 (2.74)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
70.5 (2.79)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
71.9 (2.85)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14	47-10-552-10	47-10-572-10	47-10-592-10				
73.3 (2.91)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	5.6 (.22)	10.4 (.41)	47-11-512-14	47-11-532-14	47-11-552-10	47-11-572-10	47-11-592-10				
74.7 (2.96)	10.3 (.41)	4.8 (.187)	2.3 (.09)	4 (.158)	4 (.158)	4 (.16)	8.8 (.35)	47-10-512-14	47-10-532-14							



# 47 Captive Screws

Styled knob series · 1/4-20 thread size

- Designed for hand operation
- Spring ejected
- Wide variety of sizes, recesses and installation options

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
Flare-in and Floating: Aluminum, natural

Knob: Aluminum, natural or black powder coated

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

## Installation Notes

See pages 468-469, 543

## Notes



To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle


## RecessStyles




ACTUAL SIZE

## Knob Height and Screw Projection

(Flare-in style shown)

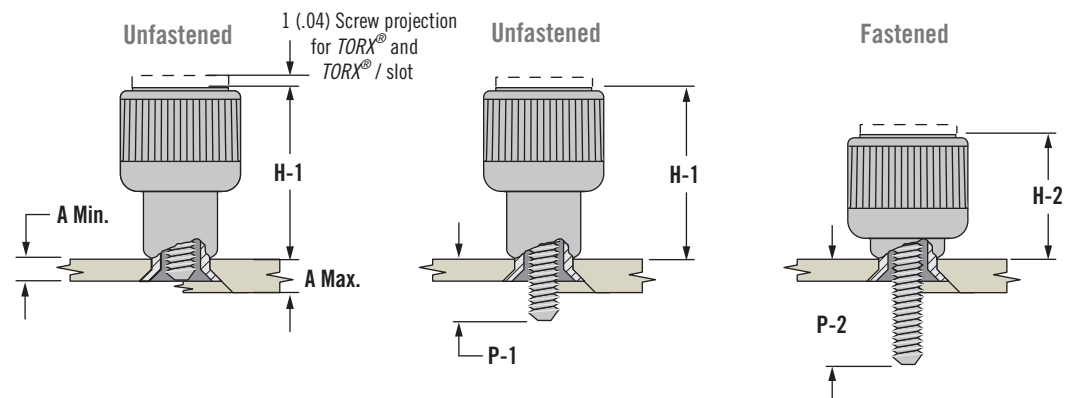

## Installation Styles

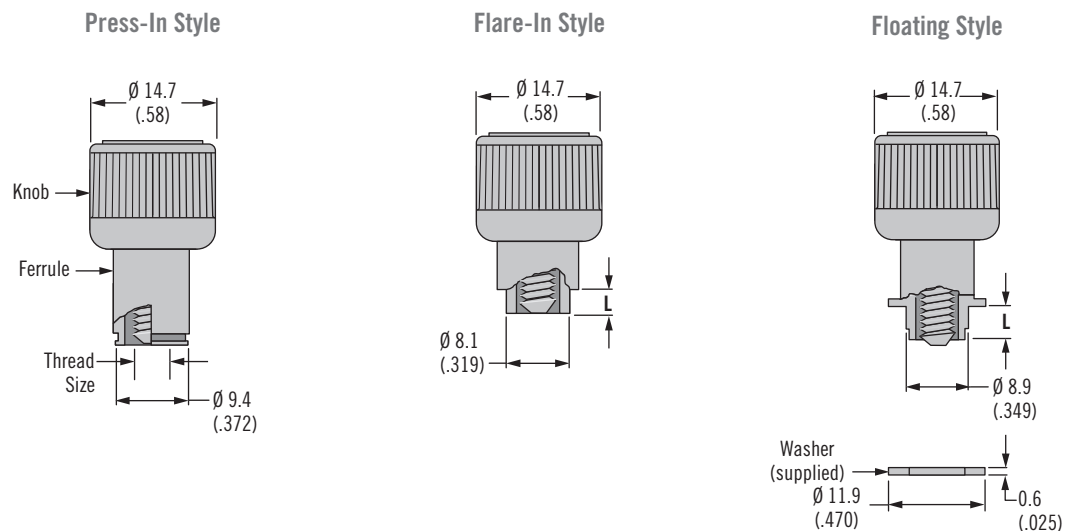

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**southco®**  
CONNECT · CREATE · INNOVATE

Installation Style	Knob Height		Outer Panel Dimensions		B	Total Float	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number								
	H-1	H-2	A Min.	A Max.				P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess	TORX® / Slot Combination	Phillips / Slot Combination				
Press-In Style	20 (.79)	13.4 (.53)	0.9 (.036)	~	~	0.8 (.03)	~	0.5 (.02)	7.1 (.28)	47-60-601-24	47-60-621-24	47-60-641-20	47-60-661-20	47-60-681-20				
								2.1 (.08)	8.7 (.34)	47-61-601-24	47-61-621-24	47-61-641-20	47-61-661-20	47-61-681-20				
								3.7 (.15)	10.3 (.41)	47-62-601-24	47-62-621-24	47-62-641-20	47-62-661-20	47-62-681-20				
								5.3 (.21)	11.9 (.47)	47-63-601-24	47-63-621-24	47-63-641-20	47-63-661-20	47-63-681-20				
Flare-In Style	19.3 (.76)	12.7 (.50)	1.5 (.058)	3.2 (.125)	0.4 (.015)	0.9 (.03)	1.8 (.070)	1.2 (.05)	7.8 (.31)	47-10-602-14	47-10-622-14	47-10-642-10	47-10-662-10	47-10-682-10				
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	2.8 (.11)	9.4 (.37)	47-10-604-14	47-10-624-14	47-10-644-10	47-10-664-10	47-10-684-10				
			4.8 (.188)	6.4 (.250)	3.2 (.125)		5 (.197)	4.4 (.17)	11 (.43)	47-10-606-14	47-10-626-14	47-10-646-10	47-10-666-10	47-10-686-10				
			6.4 (.251)	7.9 (.312)	4.8 (.189)		6.6 (.260)	6 (.24)	12.6 (.50)	47-10-608-14	47-10-628-14	47-10-648-10	47-10-668-10	47-10-688-10				
			1.5 (.058)	3.2 (.125)	0.4 (.015)		1.8 (.070)	2.8 (.11)	9.4 (.37)	47-11-602-14	47-11-622-14	47-11-642-10	47-11-662-10	47-11-682-10				
			4.4 (.17)	11 (.43)	47-12-602-14		47-12-622-14	47-12-642-10	47-12-662-10	47-12-682-10								
			6 (.24)	12.6 (.50)	47-13-602-14		47-13-622-14	47-13-642-10	47-13-662-10	47-13-682-10								
			3.2 (.126)	4.8 (.189)	1.6 (.062)		3.4 (.135)	4.4 (.17)	11 (.43)	47-11-604-14	47-11-624-14	47-11-644-10	47-11-664-10	47-11-684-10				
			6 (.24)	12.6 (.50)	47-12-604-14		47-12-624-14	47-12-644-10	47-12-664-10	47-12-684-10								
			4.8 (.189)	6.4 (.250)	3.2 (.125)		5 (.197)	6 (.24)	12.6 (.50)	47-11-606-14	47-11-626-14	47-11-646-10	47-11-666-10	47-11-686-10				
			Floating Style	20 (.79)	13.3 (.52)		~	0.8 (.031)	2.3 (.090)	2.3 (.09)	3.2 (.127)	2.1 (.08)	8.8 (.35)	47-10-610-14	47-10-630-14	47-10-650-10	47-10-670-10	47-10-690-10
							0.8 (.031)	1.6 (.063)	3.1 (.122)		3.7 (.15)	10.4 (.41)	47-11-610-14	47-11-630-14	47-11-650-10	47-11-670-10	47-11-690-10	
5.3 (.21)	12 (.47)	47-12-610-14				47-12-630-14	47-12-650-10	47-12-670-10	47-12-690-10									
2.1 (.08)	8.8 (.35)	47-10-611-14				47-10-631-14	47-10-651-10	47-10-671-10	47-10-691-10									
3.7 (.15)	10.4 (.41)	47-11-611-14				47-11-631-14	47-11-651-10	47-11-671-10	47-11-691-10									
5.3 (.21)	12 (.47)	47-12-611-14				47-12-631-14	47-12-651-10	47-12-671-10	47-12-691-10									
4.8 (.190)	3.7 (.15)	10.4 (.41)				47-10-612-14	47-10-632-14	47-10-652-10	47-10-672-10		47-10-692-10							
5.3 (.21)	12 (.47)	47-11-610-14				47-11-632-14	47-11-652-10	47-11-672-10	47-11-692-10									

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black powder coated finish, change the part number from the table as shown:

- Change 1 to 5: 47-80-102-14
- 47-80-102-54
- Change 2 to 6: 47-80-102-24
- 47-80-102-64



For a smooth knob, change the part number from the table as shown:

- Change 0 to 1: 47-90-161-20
- 47-90-161-21
- Change 4 to 5: 47-90-101-24
- 47-90-101-25

### Part Number

See table

All screw part numbers shown in table are for a natural knob finish and a knurled knob

For black finish and smooth knob options, minimums may apply





## 4C Captive Screws

Prism series · M3, M4 and M5 thread size

- Designate access points with color
- Color match captive screws to your industrial design
- High strength screw for use with high torque drivers
- Knurled and smooth knobs available

### Material and Finish

Knob: PC/ABS

Screw: Hardened carbon steel, zinc plate, chromate, plus sealer

Spring: 300 series stainless steel, passivated

Standoff:

Press-in: Carbon steel, zinc plate, chromate, plus sealer

PCB: Stainless steel

Flare-in and Floating:

Aluminum, natural

### Performance Details

Flammability Rating: UL94-V0

### Installation Notes

See pages 468-469, 543

### Notes

Press-in: Maximum panel hardness 170 HV (85 HRB)


See page 480 for details on ATCA compliant captive screws.




To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle.

### Recess Styles

#### M3

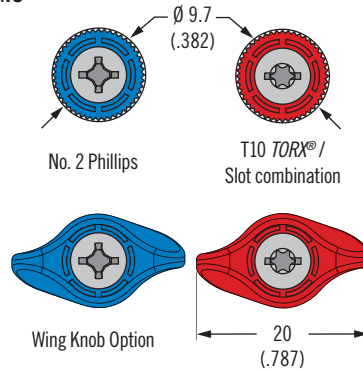


#### M4 and M5

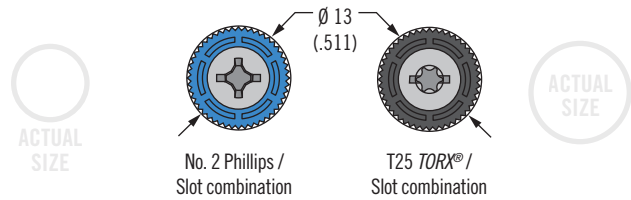


### Installation Styles

#### M3

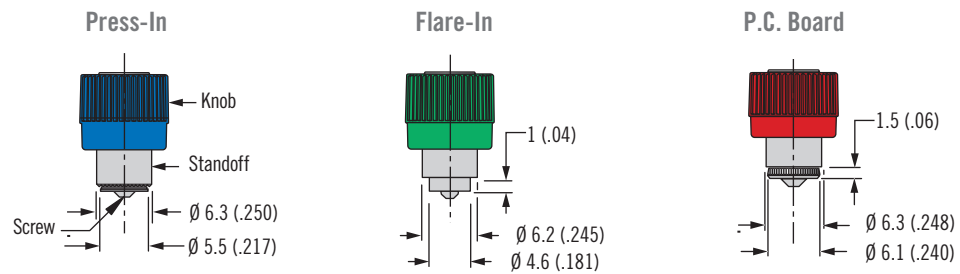


#### M4 and M5

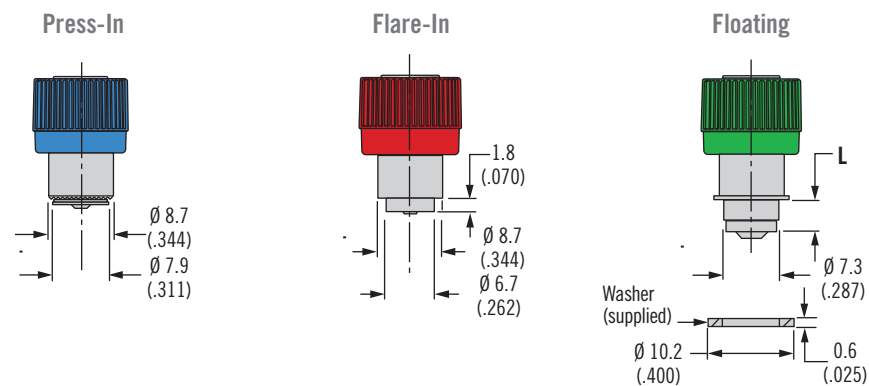

### Knob Height and Screw Projection

(Press-in style shown)

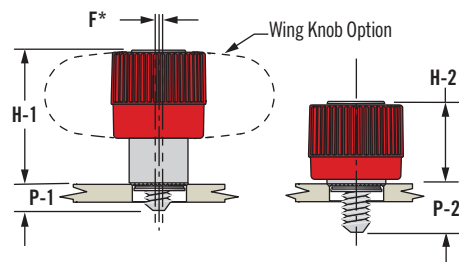

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/4C](http://www.southco.com/4C)

**southco®**  
CONNECT · CREATE · INNOVATE

**M3 Thread Size**

Installation Style	Outer Panel Dimensions		B	Part Number		Screw Projection Beyond Outer Surface of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.		Phillips Recess	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9 (.036)	~	~	4C-PH-M3-1P0-K000	4C-TS-M3-1P0-K000	0.8 (.03)	3.7 (.15)	11.5 (.45)	8.6 (.34)	0.7 (.03)	5.6 <sup>+0.04</sup> <sub>-0.04</sub>	3.2 <sup>+0.2</sup> <sub>-0.1</sub>
				4C-PH-M3-2P0-K000	4C-TS-M3-2P0-K000	2.5 (.10)	5.4 (.21)				(.219 <sup>+0.03</sup> <sub>-0</sub> )	(.125 <sup>+0.008</sup> <sub>-0.04</sub> )
P.C. Board Style	1.6 (.063)	~	~	4C-PH-M3-1B0-K000	4C-TS-M3-1B0-K000	1.5 (.06)	3.8 (.15)	10.9 (.43)	8.5 (.33)	0.7 (.03)	5.6 <sup>+0.1</sup> <sub>-0.05</sub>	3.2 <sup>+0.2</sup> <sub>-0.1</sub>
Flare-In Style	0.8 (.031)	1.5 (.058)	0.4 (.016)	4C-PH-M3-1F1-K000	4C-TS-M3-1F1-K000	0.8 (.03)	3.7 (.15)	11.5 (.45)	8.6 (.34)	0.7 (.03)	4.8 <sup>+0.08</sup> <sub>-0.04</sub>	3.0 <sup>+0.2</sup> <sub>-0.1</sub>
				4C-PH-M3-2F1-K000	4C-TS-M3-2F1-K000	1.5 (.06)	5.4 (.21)				(.189 <sup>+0.003</sup> <sub>-0.002</sub> )	(.125 <sup>+0.008</sup> <sub>-0.04</sub> )

**M4 Thread Size**

Installation Style	Outer Panel Dimensions		B	L	Part Number		Screw Projection Beyond Outer Surface Of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.			Phillips / Slot Combination	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9 (.036)†	~	~	~	4C-PS-M4-1P0-K000	4C-TS-M4-1P0-K000	0.5 (.02)	5.6 (.22)	16.3 (.64)	11.3 (.45)	0.7 (.03)	8 <sup>+0</sup> <sub>-0.08</sub>	4.4 <sup>+0.2</sup> <sub>-0.1</sub>
					4C-PS-M4-2P0-K000	4C-TS-M4-2P0-K000	2 (.08)	7.1 (.28)				(.315 <sup>+0</sup> <sub>-0.03</sub> )	(.173 <sup>+0.008</sup> <sub>-0.04</sub> )
Flare-In Style	1.5 (.060)	3.2 (.058)	0.4 (.016)	~	4C-PS-M4-1F1-K000	4C-TS-M4-1F1-K000	0.6 (.02)	5.6 (.22)	16.3 (.64)	11.3 (.45)	0.6 (.02)	6.8 <sup>+0.08</sup> <sub>-0.05</sub>	4.2 <sup>+0.05</sup> <sub>-0</sub>
					4C-PS-M4-2F1-K000	4C-TS-M4-2F1-K000	2.1 (.08)	7.1 (.28)				(.266 <sup>+0.05</sup> <sub>-0</sub> )	(.165 <sup>+0.02</sup> <sub>-0</sub> )
Floating Style	0.8 (.031)	1.6 (.063)	3.1 (.122)	4 (.158)	4C-PS-M4-3T2-K000	4C-TS-M4-3T2-K000	3.8 (.15)	8.8 (.35)	16.2 (.64)	11.2 (.44)	2.3 (.09)	8.8 <sup>+0.08</sup> <sub>-0.03</sub>	~
					4C-PS-M4-4T2-K000	4C-TS-M4-4T2-K000	5.4 (.21)	10.4 (.41)					
	1.6 (.063)	2.4 (.094)	3.9 (.153)	4.8 (.190)	4C-PS-M4-3T3-K000	4C-TS-M4-3T3-K000	3.8 (.15)	8.8 (.35)					
					4C-PS-M4-4T3-K000	4C-TS-M4-4T3-K000	5.4 (.21)	10.4 (.41)					

**M5 Thread Size**

Installation Style	Outer Panel Dimensions		B	L	Part Number		Screw Projection Beyond Outer Surface of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.			Phillips / Slot Combination	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9 (.036)†	~	~	~	4C-PS-M5-1P0-K000	4C-TS-M5-1P0-K000	0.4 (.2)	5.6 (.22)	16.4 (.65)	11.3 (.45)	0.8 (.03)	8 <sup>+0</sup> <sub>-0.08</sub>	5.2 <sup>+0.2</sup> <sub>-0.1</sub>
					4C-PS-M5-2P0-K000	4C-TS-M5-2P0-K000	2 (.08)	7.2 (.28)				(.315 <sup>+0</sup> <sub>-0.03</sub> )	(.205 <sup>+0.008</sup> <sub>-0.04</sub> )
Flare-In Style	1.5 (.06)	3.2 (.058)	0.4 (.016)	~	4C-PS-M5-1F1-K000	4C-TS-M5-1F1-K000	0.5 (.02)	5.6 (.22)	16.4 (.65)	11.3 (.45)	0.7 (.03)	6.8 <sup>+0.08</sup> <sub>-0.04</sub>	4.9 <sup>+0.05</sup> <sub>-0</sub>
					4C-PS-M5-2F1-K000	4C-TS-M5-2F1-K000	2.1 (.08)	7.2 (.28)				(.266 <sup>+0.05</sup> <sub>-0</sub> )	(.191 <sup>+0.02</sup> <sub>-0</sub> )
Floating Style	0.8 (.031)	1.6 (.063)	3.1 (.122)	4 (.158)	4C-PS-M5-3T2-K000	4C-TS-M5-3T2-K000	3.7 (.15)	8.9 (.35)	16.3 (.64)	11.2 (.44)	2.3 (.09)	8.8 <sup>+0.08</sup> <sub>-0.03</sub>	~
					4C-PS-M5-4T2-K000	4C-TS-M5-4T2-K000	5.3 (.21)	10.5 (.41)					

(shown in table)



**000**  
Black



**008**  
Blue



**013**  
Red



**014**  
Green



**Your Color**  
Contact Southco

**Part Number**

See table

Specify Wing Knob:

(M3, Press-in, Flare-in only)

To indicate Wing Knob option, change K to W of the part number

Example:

4C-PH-M3-1P0-K000, Round Knob

4C-PH-M3-1P0-W000, Wing Knob

**Notes:** \*F indicates the maximum float in the unfastened position.

† For panels thinner than 0.9 (.036), contact Southco.

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated

**Part Number**

See table

To indicate color, change the last three digits of the part number. For knob style, K = knurled and N = smooth. For smooth knob change K to N. Example:

4C-PS-06-1P0-K000, black, knurled  
4C-PS-06-1P0-N013, red, smooth





# 4C Captive Screws

Prism series · 4-40, 6-32 and 10-32 thread size

- Designate access points with color
- Color match captive screws to your industrial design
- High strength screw for use with high torque drivers
- Knurled, smooth and wing knobs available

### Material and Finish

Knob: PC/ABS

Screw: Hardened carbon steel, zinc plate, chromate, plus sealer

Spring: 300 series stainless steel, passivated

Standoff:

Press-in: Carbon steel, zinc plate, chromate, plus sealer

PCB: Stainless steel

Flare-in and Floating: Aluminum, natural

Performance Details

Flammability Rating: UL94-V0

### Installation Notes

See pages 468-469, 543

### Notes


Press-in: Maximum panel hardness 170 HV (85 HRB)



To ensure you receive **SOUTHCO** quality parts, look for the segmented circle.


TORX is a registered trademark of ACUMENT Intellectual Properties, LLC

### Recess Styles

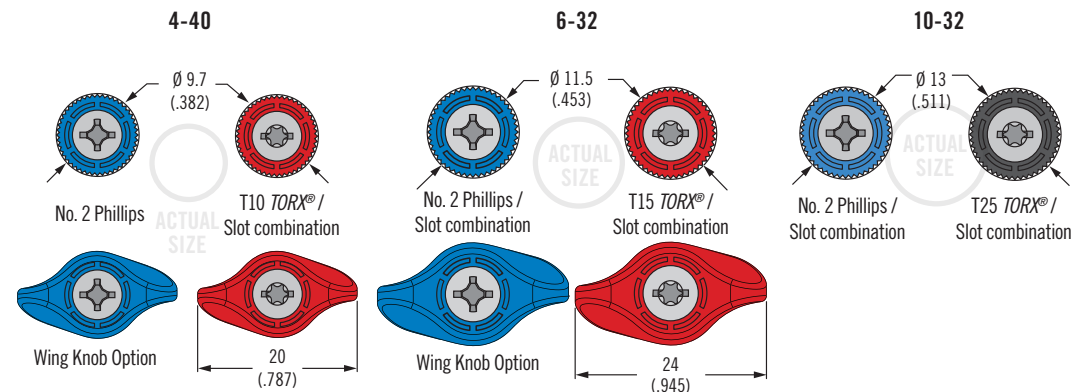


### Installation Styles


#### 4-40

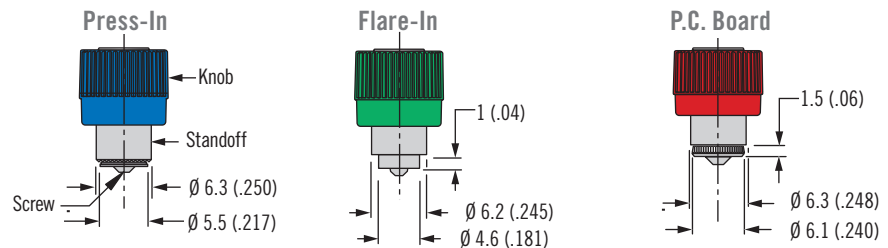

#### 6-32

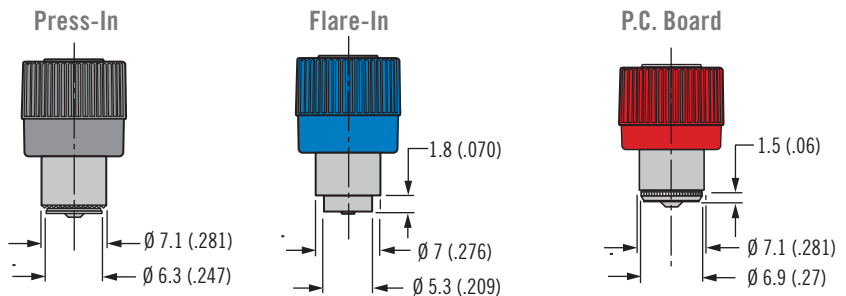


#### 10-32

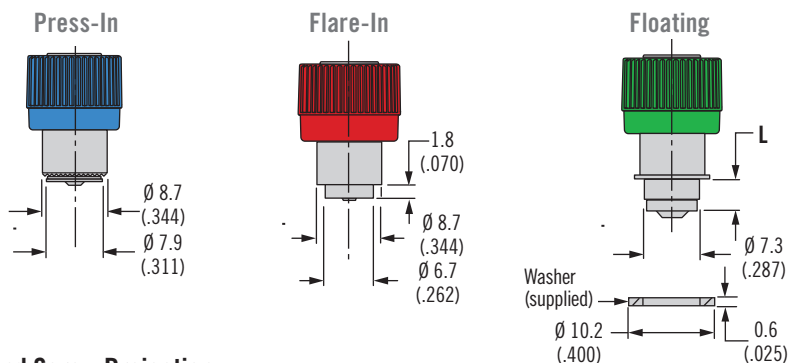

### Knob Height and Screw Projection

(Press-in style shown)

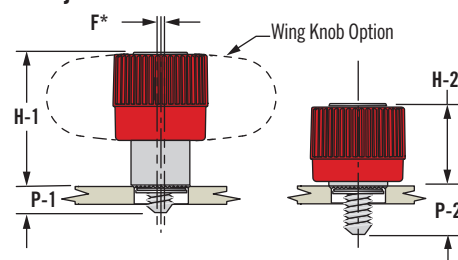

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/4C](http://www.southco.com/4C)

4-40 Thread Size

Installation Style	Outer Panel Dimensions		B	Part Number		Screw Projection Beyond Outer Surface of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.		Phillips Recess	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9† (.036)	~	~	4C-PH-04-1P0-K000	4C-TS-04-1P0-K000	0.8 (.03)	3.8 (.15)	11.5 (.45)	8.6 (.34)	0.7 (.03)	5.6 <sup>+0.04</sup> <sub>-0.04</sub> (.219 <sup>+0.003</sup> <sub>-0</sub> )	3.2 <sup>+0.2</sup> <sub>-0.1</sub> (.125 <sup>+0.008</sup> <sub>-0.004</sub> )
				4C-PH-04-2P0-K000	4C-TS-04-2P0-K000	2.5 (.10)	5.3 (.21)					
P.C. Board Style	1.6 (.063)	~	~	4C-PH-04-1B0-K000	4C-TS-04-1B0-K000	1.5 (.06)	3.8 (.15)	10.9 (.43)	8.5 (.33)	0.7 (.03)	5.6 <sup>+0.1</sup> <sub>-0.05</sub> (.220 <sup>+0.003</sup> <sub>-0.002</sub> )	3.2 <sup>+0.2</sup> <sub>-0.1</sub> (.220 <sup>+0.008</sup> <sub>-0.004</sub> )
				4C-PH-04-2B0-K000	4C-TS-04-2B0-K000	3.3 (.13)	5.5 (.22)					
Flare-In Style	0.8 (.031)	1.5 (.059)	0.4 (.016)	4C-PH-04-1F1-K000	4C-TS-04-1F1-K000	0.8 (.03)	3.7 (.15)	11.5 (.45)	8.6 (.34)	0.7 (.03)	4.8 <sup>+0.08</sup> <sub>-0.05</sub> (.187 <sup>+0.005</sup> <sub>-0.000</sub> )	3.0 <sup>+0.2</sup> <sub>-0.1</sub> (.125 <sup>+0.008</sup> <sub>-0.004</sub> )
				4C-PH-04-2F1-K000	4C-TS-04-2F1-K000	2.5 (.10)	5.4 (.21)					

6-32 Thread Size

Installation Style	Outer Panel Dimensions		B	Part Number		Screw Projection Beyond Outer Surface of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.		Phillips / Slot Combination	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9† (.036)	~	~	4C-PS-06-1P0-K000	4C-TS-06-1P0-K000	0.7 (.03)	5 (.20)	15.5 (.61)	11.3 (.44)	0.7 (.03)	6.4 <sup>+0.03</sup> <sub>-0.05</sub> (.250 <sup>+0.003</sup> <sub>-0</sub> )	3.7 <sup>+0.2</sup> <sub>-0.1</sub> (.146 <sup>+0.008</sup> <sub>-0.004</sub> )
				4C-PS-06-2P0-K000	4C-TS-06-2P0-K000	2.3 (.09)	6.6 (.26)					
P.C. Board Style	1.5 (.06)	~	~	4C-PS-06-1B0-K000	4C-TS-06-1B0-K000	1.7 (.07)	6.2 (.25)	14.5 (.57)	10 (.39)	0.7 (.03)	6.4 ± 0.1 (.252 ± .004)	3.7 <sup>+0.2</sup> <sub>-0.1</sub> (.146 <sup>+0.008</sup> <sub>-0.004</sub> )
Flare-In Style	1.5 (.059)	3.2 (.125)	0.4 (.016)	4C-PS-06-1F1-K000	4C-TS-06-1F1-K000	0.8 (.03)	5 (.20)	15.5 (.61)	11.3 (.44)	0.7 (.03)	5.4 <sup>+0.1</sup> <sub>-0</sub> (.213 <sup>+0.005</sup> <sub>-0.000</sub> )	3.7 <sup>+0.2</sup> <sub>-0.1</sub> (.146 <sup>+0.008</sup> <sub>-0.004</sub> )
				4C-PS-06-2F1-K000	4C-TS-06-2F1-K000	2.3 (.09)	6.6 (.26)					

10-32 Thread Size

Installation Style	Outer Panel Dimensions		B	L	Part Number		Screw Projection Beyond Outer Surface of Panel		Knob Height†		Total Float	Panel Preparation	
	A Min.	A Max.			Phillips / Slot Combination	TORX® / Slot Combination	P-1	P-2	H-1	H-2		F*	∅ D
Press-In Style	0.9† (.036)	~	~	~	4C-PS-10-1P0-K000	4C-TS-10-1P0-K000	0.5 (.02)	5.6 (.22)	11.3 (.45)	11.3 (.45)	0.6 (.02)	8 <sup>+0</sup> <sub>-0.08</sub> (.315 <sup>+0.003</sup> <sub>-0.003</sub> )	5.2 <sup>+0.2</sup> <sub>-0.1</sub> (.205 <sup>+0.008</sup> <sub>-0.004</sub> )
					4C-PS-10-2P0-K000	4C-TS-10-2P0-K000	2 (.08)	7.1 (.28)					
Flare-In Style	1.5 (.058)	3.2 (.125)	0.4 (.016)	1.8 (.070)	4C-PS-10-1F1-K000	4C-TS-10-1F1-K000	0.6 (.02)	5.6 (.22)	16.3 (.64)	16.3 (.64)	0.6 (.02)	6.8 <sup>+0.08</sup> <sub>-0.04</sub> (.266 <sup>+0.005</sup> <sub>-0</sub> )	4.9 <sup>+0.05</sup> <sub>-0</sub> (.191 <sup>+0.002</sup> <sub>-0</sub> )
					4C-PS-10-2F1-K000	4C-TS-10-2F1-K000	2.1 (.08)	7.1 (.28)					
Floating Style	0.8 (.031)	1.6 (.063)	3.1 (.122)	4 (.158)	4C-PS-10-3T2-K000	4C-TS-10-3T2-K000	3.8 (.15)	8.8 (.35)	11.2 (.44)	11.2 (.44)	2.3 (.09)	8.8 <sup>+0.08</sup> <sub>-0.03</sub> (.346 <sup>+0.003</sup> <sub>-0.001</sub> )	~
	1.6 (.063)	2.4 (.094)	3.9 (.153)	4.8 (.190)	4C-PS-10-4T2-K000	4C-TS-10-4T2-K000	5.4 (.21)	10.4 (.41)					
					4C-PS-10-3T3-K000	4C-TS-10-3T3-K000	3.8 (.15)	8.8 (.35)					
					4C-PS-10-4T3-K000	4C-TS-10-4T3-K000	5.4 (.21)	10.4 (.41)					

(shown in table)



000  
Black



008  
Blue



013  
Red



014  
Green



Your Color  
Contact Southco

Part Number

See table

Specify Wing Knob:

(4-40 and 6-32, Press-in and Flare-in only)

To indicate Wing Knob option, change K to W of the part number

Example:

4C-PS-06-1P0-K000, Round Knob

4C-PS-06-1P0-W000, Wing Knob

Notes: \*F indicates the maximum float in the unfastened position.

† For panels thinner than 0.9 (.036), contact Southco.

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated

Part Number

See table

To indicate color, change the last three digits of the part number.

For knob style, K = knurled and N = smooth. For smooth knob change K to N. Example:

4C-PS-06-1P0-K000, black, knurled

4C-PS-06-1P0-N013, red, smooth





# 47 Captive Screws

Restricted access series · M4 and M5 thread size

- Reduces risk of unauthorized access
- Meets UL-1950, IEC 950 and EN-60950
- Hand operation to secure with tool-only removal

### Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
 Flare-in and Floating: Aluminum, natural

Knob: Aluminum, natural or black organic coating

Screw: Hardened carbon steel, zinc plate, chromate, plus sealer

### Installation Notes


See pages 468-469, 543

### Recess Styles




### Knob Height and Screw Projection

(Press-in style shown)

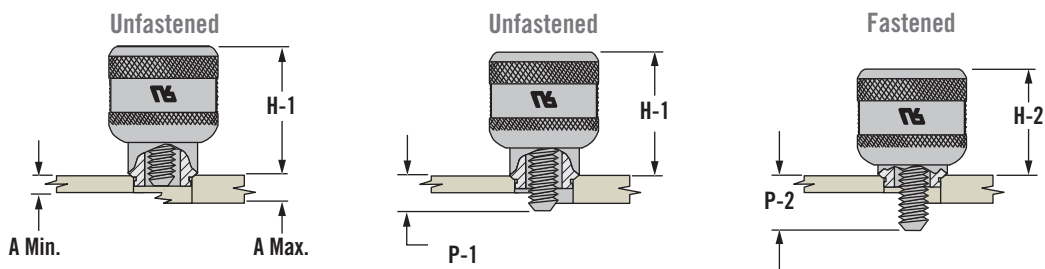

### Installation Styles

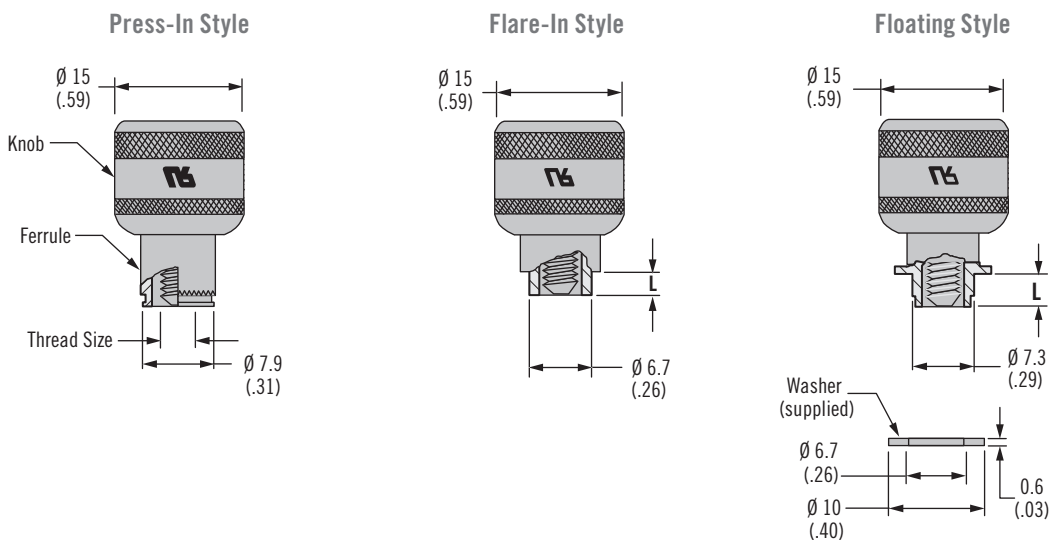

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)



**M4 Thread Size**

Installation Style	Knob Height		Outer Panel Dimensions		Dimension B*	Flange Length L	Screw Projection Beyond Outer Surface of Panel		Part Number						
	H-1	H-2	A Min.	A Max.			P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess				
Press-In Style	18.5 (.73)	14 (.55)	0.9 (.036)	~	~	~	0.7 (.03)	5.6 (.22)	47-90-301-22	47-90-321-22	47-90-341-22				
							2.3 (.09)	7.2 (.28)	47-91-301-22	47-91-321-22	47-91-341-22				
							3.8 (.15)	8.7 (.34)	47-92-301-22	47-92-321-22	47-92-341-22				
							5.4 (.21)	10.3 (.41)	47-93-301-22	47-93-321-22	47-93-341-22				
Flare-In Style	18 (.70)	13 (.51)	1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	1.4 (.06)	6.2 (.24)	47-80-302-22	47-80-322-22	47-80-342-22				
			3.2 (.125)	4.8 (.188)	1.6 (.062)	3.4 (.14)	3.1 (.12)	7.9 (.31)	47-80-304-22	47-80-324-22	47-80-344-22				
			1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	3.1 (.12)	7.9 (.31)	47-81-302-22	47-81-322-22	47-81-342-22				
							4.1 (.16)	8.9 (.35)	47-82-302-22	47-82-322-22	47-82-342-22				
							6.1 (.24)	10.9 (.43)	47-83-302-22	47-83-322-22	47-83-342-22				
							2.4 (.09)	7.2 (.28)	47-80-310-22	47-80-330-22	47-80-350-22				
Floating Style	18 (.70)	14 (.55)	0.1 (.001)	0.8 (.031)	2.3 (.09)	3.2 (.13)	3.4 (.13)	8.2 (.32)	47-81-310-22	47-81-330-22	47-81-350-22				
							5.4 (.21)	10.2 (.40)	47-82-310-22	47-82-330-22	47-82-350-22				
							0.8 (.031)	1.6 (.063)	3.1 (.12)	4 (.16)	2.4 (.09)	7.2 (.22)	47-80-311-22	47-80-331-22	47-80-351-22
											3.4 (.13)	8.2 (.32)	47-81-311-22	47-81-331-22	47-81-351-22
											5.4 (.21)	10.2 (.40)	47-82-311-22	47-82-331-22	47-82-351-22
											2.4 (.09)	7.2 (.28)	47-80-310-22	47-80-330-22	47-80-350-22

**M5 Thread Size**

Press-In Style	18.5 (.73)	14 (.55)	0.9 (.036)	~	~	~	0.7 (.03)	5.6 (.22)	47-90-501-22	47-90-521-22	47-90-541-22				
							2.3 (.09)	7.2 (.28)	47-91-501-22	47-91-521-22	47-91-541-22				
							3.8 (.15)	8.7 (.34)	47-92-501-22	47-92-521-22	47-92-541-22				
							5.4 (.21)	10.3 (.41)	47-93-501-22	47-93-521-22	47-93-541-22				
Flare-In Style	18 (.70)	13 (.51)	1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	1.4 (.06)	6.2 (.24)	47-80-502-22	47-80-522-22	47-80-542-22				
			3.2 (.125)	4.8 (.188)	1.6 (.062)	3.4 (.14)	3.1 (.12)	7.9 (.31)	47-80-504-22	47-80-524-22	47-80-544-22				
			1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	3.1 (.12)	7.9 (.31)	47-81-502-22	47-81-522-22	47-81-542-22				
							4.1 (.16)	8.9 (.35)	47-82-502-22	47-82-522-22	47-82-542-22				
							6.1 (.24)	10.9 (.43)	47-83-502-22	47-83-522-22	47-83-542-22				
							4.1 (.16)	8.9 (.35)	47-81-504-22	47-81-524-22	47-81-544-22				
Floating Style	18 (.70)	14 (.55)	0.1 (.001)	0.8 (.031)	2.3 (.09)	3.2 (.13)	2.4 (.09)	7.2 (.28)	47-80-510-22	47-80-530-22	47-80-550-22				
							3.4 (.13)	8.2 (.32)	47-81-510-22	47-81-530-22	47-81-550-22				
							5.4 (.21)	10.2 (.40)	47-82-510-22	47-82-530-22	47-82-550-22				
							0.8 (.031)	1.6 (.063)	3.1 (.12)	4 (.16)	2.4 (.09)	7.2 (.28)	47-80-511-22	47-80-531-22	47-80-551-22
											3.4 (.13)	8.2 (.32)	47-81-511-22	47-81-531-22	47-81-551-22
											5.4 (.21)	10.4 (.40)	47-82-511-22	47-82-531-22	47-82-551-22
3.4 (.15)	8.2 (.35)	47-80-512-22	47-80-532-22	47-80-552-22											
1.6 (.063)	2.4 (.094)	3.9 (.15)	4.8 (.19)	5.4 (.21)	10.2 (.40)	47-81-512-22	47-81-532-22	47-81-552-22							

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black finish, change the part number from the table as shown:

Change 2 to 6:      47-80-102-22  
                                  47-80-102-62

**Part Number**

See table

All screw part numbers shown in table are for a natural finish

For black finish minimums may apply





# 47 Captive Screws

Restricted access series · 6-32 and 10-32 thread size

- Reduces risk of unauthorized access
- Meets UL-1950, IEC 950 and EN-60950
- Hand operation to secure with tool-only removal

## Material and Finish

Ferrule:

Press-in: Hardened carbon steel, zinc plate, chromate, plus sealer  
 Flare-in and Floating: Aluminum, natural

Knob: Aluminum, natural or black organic coating


Screw: Hardened carbon steel, zinc plate, chromate, plus sealer

## Installation Notes


See pages 468-469, 543

## Recess Styles


Slotted



No. 2 Phillips






T15 TORX® - 6-32  
 T25 TORX® - 10-32




## Knob Height and Screw Projection

(Press-in style shown)




## Installation Styles


Press-In Style



Flare-In Style



Floating Style

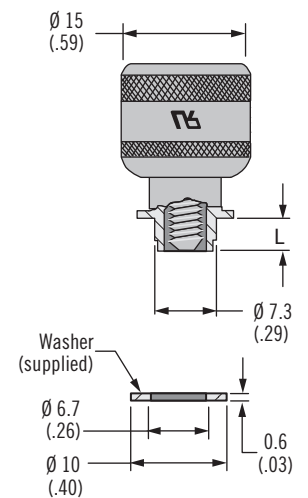

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



[www.southco.com/47](http://www.southco.com/47)

**6-32 Thread Size**

Installation Style	Knob Height†		Outer Panel Dimensions		Dimension B*	Flange Length L	Screw Projection Beyond Outer Surface Of Panel		Part Number		
	H-1	H-2	A Min.	A Max.			P-1	P-2	Slotted Recess	Phillips Recess	TORX® Recess
Press-In Style	18.5 (.73)	14 (.54)	0.9 (.036)	~	~	~	0.5 (.02)	5.3 (.21)	47-60-201-22	47-60-221-22	47-60-241-22
							2.3 (.09)	6.9 (.27)	47-61-201-22	47-61-221-22	47-61-241-22
							3.8 (.15)	8.3 (.33)	47-62-201-22	47-62-221-22	47-62-241-22
							5.3 (.21)	10.1 (.41)	47-63-201-22	47-63-221-22	47-63-241-22
Flare-In Style	18 (.70)	13 (.51)	1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	1.4 (.06)	6.2 (.24)	47-10-202-22	47-10-222-22	47-10-242-22
			3.2 (.125)	4.8 (.189)	1.6 (.062)	3.4 (.14)	3.1 (.12)	7.9 (.31)	47-10-204-22	47-10-224-22	47-10-244-22
			1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	3.1 (.12)	7.9 (.31)	47-11-202-22	47-11-222-22	47-11-242-22
			4.1 (.16)	8.9 (.35)	47-12-202-22	47-12-222-22	47-12-242-22				
			6.1 (.24)	10.9 (.43)	47-13-202-22	47-13-222-22	47-13-242-22				
			3.2 (.125)	4.8 (.189)	1.6 (.062)	3.4 (.14)	4.1 (.16)	8.9 (.35)	47-11-204-22	47-11-224-22	47-11-244-22
			6.1 (.24)	10.9 (.43)	47-12-204-22	47-12-224-22	47-12-244-22				
			4.1 (.16)	8.9 (.35)	47-11-204-22	47-11-224-22	47-11-244-22				
Floating Style	18 (.70)	14 (.54)	0.1 (.001)	0.8 (.031)	2.3 (.09)	3.2 (.13)	2.4 (.09)	7.2 (.28)	47-10-210-22	47-10-230-22	47-10-250-22
							3.4 (.13)	8.2 (.32)	47-11-210-22	47-11-230-22	47-11-250-22
							5.4 (.21)	10.2 (.40)	47-12-210-22	47-12-230-22	47-12-250-22
			0.8 (.031)	1.6 (.063)	3.1 (.12)	4 (.16)	2.4 (.09)	7.2 (.22)	47-10-211-22	47-10-231-22	47-10-251-22
							3.4 (.13)	8.2 (.32)	47-11-211-22	47-11-231-22	47-11-251-22
							5.4 (.21)	10.2 (.40)	47-12-211-22	47-12-231-22	47-12-251-22
			1.6 (.063)	2.4 (.094)	3.9 (.15)	4.8 (.19)	3.4 (.13)	8.2 (.32)	47-10-212-22	47-10-232-22	47-10-252-22
							5.4 (.21)	10.2 (.40)	47-11-212-22	47-11-232-22	47-11-252-22

**10-32 Thread Size**

Press-In Style	18.5 (.73)	14 (.54)	0.9 (.036)	~	~	~	0.7 (.03)	5.6 (.22)	47-60-501-22	47-60-521-22	47-60-541-22
							2.3 (.09)	7.2 (.28)	47-61-501-22	47-61-521-22	47-61-541-22
							3.8 (.15)	8.7 (.34)	47-62-501-22	47-62-521-22	47-62-541-22
							5.4 (.21)	10.3 (.41)	47-63-501-22	47-63-521-22	47-63-541-22
Flare-In Style	18 (.70)	13 (.51)	1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	1.4 (.06)	6.2 (.24)	47-10-502-22	47-10-522-22	47-10-542-22
			3.2 (.125)	4.8 (.189)	1.6 (.062)	3.4 (.14)	3.1 (.12)	7.9 (.31)	47-10-504-22	47-10-524-22	47-10-544-22
			1.5 (.058)	3.2 (.125)	0.6 (.023)	1.8 (.07)	3.1 (.12)	7.9 (.31)	47-11-502-22	47-11-522-22	47-11-542-22
			4.1 (.16)	8.9 (.35)	47-12-502-22	47-12-522-22	47-12-542-22				
			6.1 (.24)	10.9 (.43)	47-13-502-22	47-13-522-22	47-13-542-22				
			3.2 (.125)	4.8 (.189)	1.6 (.062)	3.2 (.14)	4.1 (.16)	8.9 (.35)	47-11-504-22	47-11-524-22	47-11-544-22
			6.1 (.24)	10.9 (.43)	47-12-504-22	47-12-524-22	47-12-544-22				
			4.1 (.16)	8.9 (.35)	47-11-504-22	47-11-524-22	47-11-544-22				
Floating Style	18 (.70)	14 (.54)	0.1 (.001)	0.8 (.031)	2.3 (.09)	3.2 (.13)	2.4 (.09)	7.2 (.28)	47-10-510-22	47-10-530-22	47-10-550-22
							3.4 (.13)	8.2 (.32)	47-11-510-22	47-11-530-22	47-11-550-22
							5.4 (.21)	10.2 (.40)	47-12-510-22	47-12-530-22	47-12-550-22
			0.8 (.031)	1.6 (.063)	3.1 (.12)	4 (.16)	2.4 (.09)	7.2 (.28)	47-10-511-22	47-10-531-22	47-10-551-22
							3.4 (.13)	8.2 (.32)	47-11-511-22	47-11-531-22	47-11-551-22
							5.4 (.21)	10.2 (.40)	47-12-511-22	47-12-531-22	47-12-551-22
			1.6 (.063)	2.4 (.094)	3.9 (.15)	4.8 (.19)	3.4 (.13)	8.2 (.32)	47-10-512-22	47-10-532-22	47-10-552-22
							5.4 (.21)	10.2 (.40)	47-11-512-22	47-11-532-22	47-11-552-22

Part numbers in shaded rows (shown in table) are fully retracting in minimum panel thickness



To add a black finish, change the part number from the table as shown:


Change 2 to 6: 47-80-102-22  
47-80-102-62

**Part Number**

See table

All screw part numbers shown in table are for a natural finish

For black finish minimums may apply



# 47/4C Captive Screws

## Panel preparation and installation

### Installation Notes


1. Prepare panel as shown. Top edge of hole should be sharp
2. Press captive screw into panel until ferrule is installed as shown

Installation closer to the panel edge requires a fixture to constrain the panel edges

### Notes

Recommended minimum distance from edge of panel to centerline of hole is  $1.5 \times \phi D$

### Press-In Style

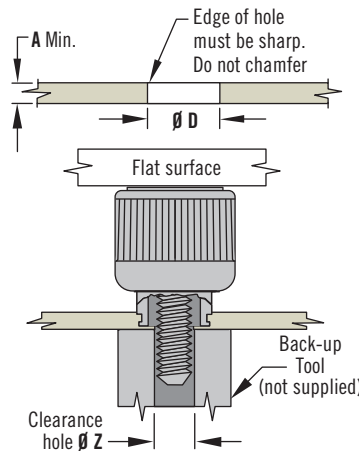

See page 543 for additional installation guidelines

Notes: For use in material hardnesses RB85 or less, such as low carbon steels that are half hard or softer, stainless steels in the annealed condition and aluminum.

Thread Size	$\phi D$	Clearance Hole $\phi Z$ $\begin{matrix} +0.2 & +.008 \\ -0.1 & -.004 \end{matrix}$
M3 or 4-40	$5.6^{+0.03}_{-0.05}$ (.219 $^{+0.003}_{-0}$ )	3.2 (.125)
M3.5 or 6-32	$6.4^{+0.03}_{-0.05}$ (.250 $^{+0.003}_{-0}$ )	3.7 (.146)
M4 or 8-32	$8^{+0}_{-0.08}$ (.315 $^{+0}_{-0.003}$ )	4.4 (.173)
M5 or 10-32	$8^{+0}_{-0.08}$ (.315 $^{+0}_{-0.003}$ )	5.2 (.205)
M6 or 1/4-20	$9.5^{+0.1}_{-0}$ (.375 $^{+0.003}_{-0}$ )	6.2 (.260)

### Performance Details

Pullout force: 360 N (80 lbf)  
Side load against unfastened knob: 200 N (45 lbf)


### Installation Notes

1. Prepare panel as shown.
2. Use pilot lead-in to guide assembly into hole and press knurl into panel until ferrule shoulder contacts surface

### Notes

Strength data based on drilled holes in G-10 P.C. Board

### P.C. Board Style

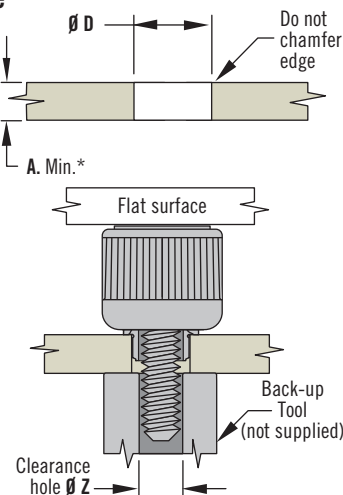


Thread Size	$\phi D$	Clearance Hole $\phi Z$ $\begin{matrix} +0.2 & +.008 \\ -0.1 & -.004 \end{matrix}$
M3 or 4-40	$5.6^{+0.1}_{-0.05}$ (.219 $^{+0.004}_{-0.002}$ )	3.2 (.125)
M3.5 or 6-32	$6.4 \pm 1$ (.252 $\pm 0.004$ )	3.7 (.146)

### Installation Notes

1. Prepare panel as shown.
2. Install tool in suitable press. Only LIGHT pressure will be required
3. Insert screw assembly into prepared hole in panel
4. Place work under press, center tool over screw thread and flare ferrule into counter-sink in panel. Use LIGHT pressure

Installation Force:  
1600 N (350 lbf) to 2500 N (550 lbf)  
Installation force depends on thread size

### Flare-In Style

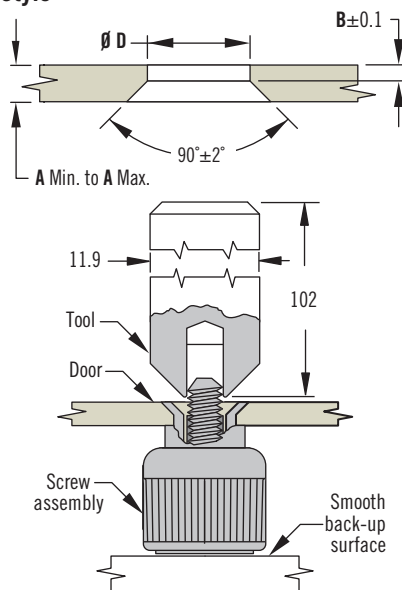


Thread Size	$\phi D$	Tool Part Number
M3 or 4-40	$4.8^{+0.08}_{-0.05}$ (.187 $^{+0.005}_{-0}$ )	47-104
M3.5 or 6-32	$5.4^{+0.1}_{-0}$ (.213 $^{+0.005}_{-0}$ )	47-106
M4 or 8-32	$6.8^{+0.08}_{-0.04}$ (.266 $^{+0.005}_{-0}$ )	47-108
10-32	$6.8^{+0.08}_{-0.04}$ (.266 $^{+0.005}_{-0}$ )	47-110
M5	$6.8^{+0.08}_{-0.04}$ (.266 $^{+0.005}_{-0}$ )	47-115
M6 or 1/4-20	$8.2^{+0.1}_{-0}$ (.323 $^{+0.005}_{-0}$ )	47-125


Dimensions in millimeters (inch) unless otherwise stated

### Floating Style

Panel preparation 1

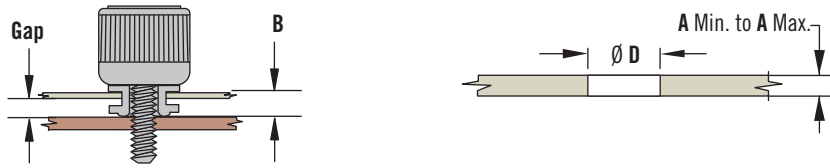


Panel preparation 2

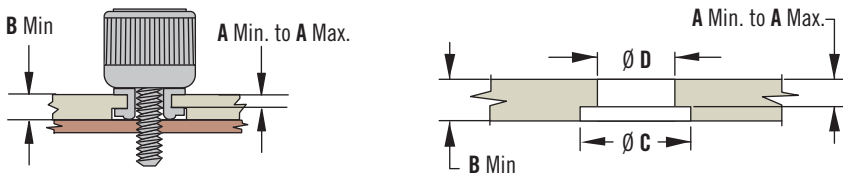


Thread Size	Tool Part Number
M3 or 4-40	47-04
M3.5 or 6-32	47-06
M4 or 8-32	47-08
M5	47-05
10-32	47-10
M6 or 1/4-20	47-25

Thread Size	Ø D	Counterbore Min. Ø C
M3 or 4-40	6.4 (.250) <small>+0.008 (+.003) -0.03 -0.001</small>	9.4 (.375)
M3.5 or 6-32	7.2 (.283)	10.5 (.413)
M4 or 8-32	8.8 (.346)	12 (.469)
M5 or 10-32	8.8 (.346)	12 (.469)
M6 or 1/4-20	10.5 (.413)	13.5 (.531)

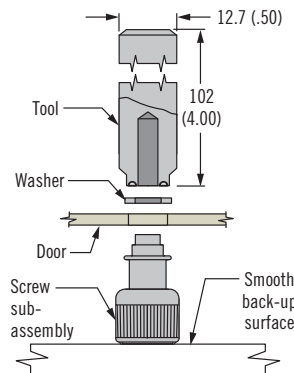


### Snap-In Style


Panel preparation 1

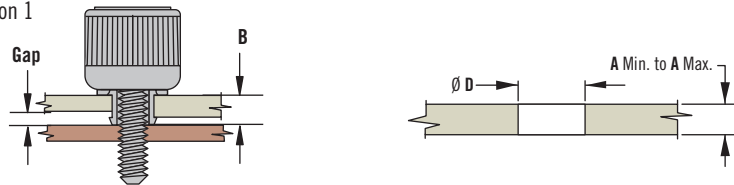

Panel preparation 2

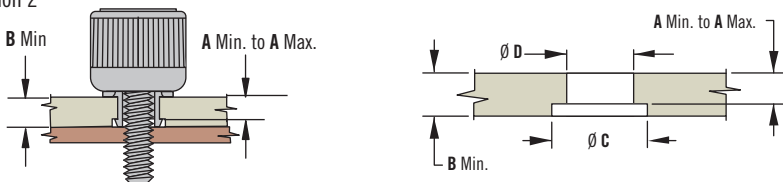

Thread Size	Ø D	Counterbore Min. Ø C
M3.5 or 6-32	6.4 (.250) <small>+0 -0.1 (± .002)</small>	7.5 (.295)
M4 or 8-32	6.4 (.250)	7.5 (.295)
M5 or 10-32	6.4 (.250)	7.5 (.295)

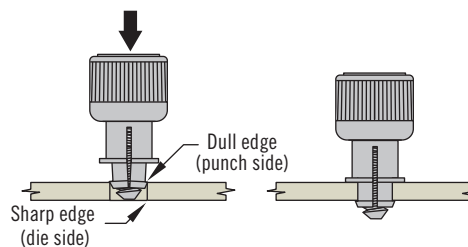

### Installation Notes

Floating and Snap-in style:  
Panel preparation 1:  
Requires space between inner and outer panels.

Specify the fastener for panel thickness A to fall between the range A Minimum to A Maximum:  
gap = B - A outer panel thickness

Panel preparation 2:  
Counter bore the panel (B = Minimum panel thickness) to a thickness (A) between the range of A Minimum and A Maximum

Minimum bore depth = panel thickness - A Maximum

For gap = Ø, panel thickness must be ≥ B value (before counterbore) for the given part number

### Notes

B and A Maximum values are provided in the corresponding fastener selection tables for each part number

If holes are drilled, top edge of hole should be chamfered



# 47-SM Captive Screws

Styled knob series · Surface Mount Technology (SMT) Style

- For installation to PC Board material utilizing surface mount technology
- Smooth knob meets UL-1950
- Designed for hand operation
- Spring ejected
- Variety of sizes, recesses

### Material and Finish

Ferrule: Steel, Tin plated

Knob:

Aluminum, natural

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer

Internal spring: 300 series stainless steel passivated

Plug: Silicone rubber

### Installation Notes

Visit [www.southco.com](http://www.southco.com) for additional installation guidelines

To ensure you receive




**SOUTHCO®** quality parts, look for the segmented circle.

### Part Number

See table


### Recess Styles

**TORX® / Slot Combination**




T10 TORX® / Slot Combination (M3,4-40)  
T15 TORX® / Slot (6-32)


**Phillips / Slot Combination**



No. 1 Phillips / Slot Recess (M3,4-40)  
No. 2 Phillips / Slot Recess (6-32)

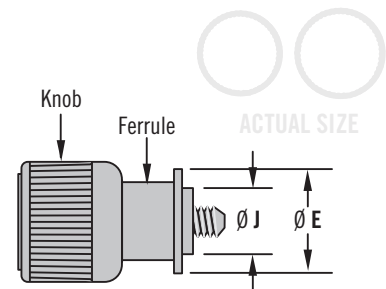


### Knob Height and Screw Projection

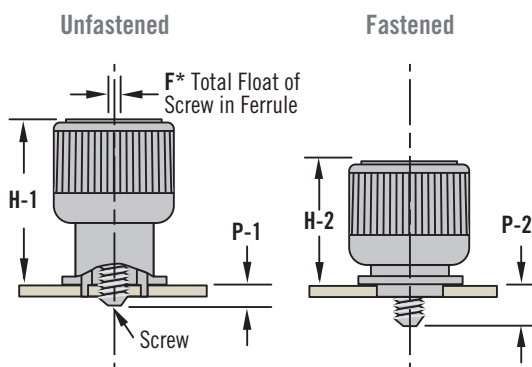

\* Value represents float in unfastened position  
Notes: P-1, P-2 Screw Projection measured from the top side of panel

### PC Board Preparation

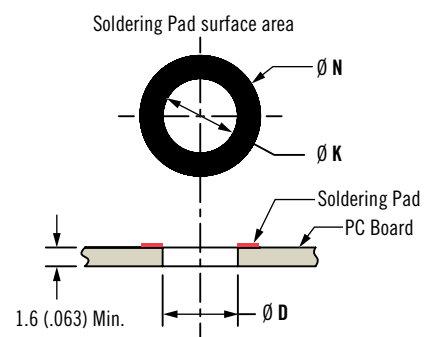

### 47 Captive Screws Styled knob series - SMT Style


#### Part Number

Specify Package  
Indicate package option with last digit of the part number

#### Example

47-SM-1311-K-R: Reel Package (as shown in table)  
47-SM-1311-K-T: Tray Package

### Screw as Shipped in Reel Pack or Tray Pack



Thread Size	Part Number (Reel package shown)										Panel Preparation				
	Knurled Head		Smooth Head		H-1	H-2	P-1	P-2	ØB	ØJ	ØE	F*	ØK	ØN	ØD
	Phillips / Slotted	TORX® / Slotted	Phillips / Slotted	TORX® / Slotted											
M3 x 0.5	47-SM-3311-K-R	47-SM-3411-K-R	47-SM-3311-N-R	47-SM-3411-N-R	11.4 (.45)	8.4 (.33)	1.4 (.05)	4.4 (.17)	10.7 (.42)	5.5 (.217)	7.6 (.30)	0.7 (.03)	5.6 (.22)	8.6 (.34)	5.6 +0.08/-0 (.220 +.003/-0.000)
	47-SM-3321-K-R	47-SM-3421-K-R	47-SM-3321-N-R	47-SM-3421-N-R			1.4 (.05)	4.4 (.17)							
4-40	47-SM-1311-K-R	47-SM-1411-K-R	47-SM-1311-N-R	47-SM-1411-N-R	15.5 (.61)	10.7 (.42)	1.4 (.05)	4.4 (.17)	11.4 (.45)	6.2 (.244)	8.1 (.32)	0.7 (.03)	6.4 (.25)	10.2 (.40)	6.4 +0.08/-0 (.252 +.003/-0.000)
	47-SM-1321-K-R	47-SM-1421-K-R	47-SM-1321-N-R	47-SM-1421-N-R			2.2 (.09)	5.2 (.20)							
6-32	47-SM-2311-K-R	47-SM-2411-K-R	47-SM-2311-N-R	47-SM-2411-N-R	15.5 (.61)	10.7 (.42)	0.8 (.03)	5.6 (.22)	11.4 (.45)	6.2 (.244)	8.1 (.32)	0.7 (.03)	6.4 (.25)	10.2 (.40)	6.4 +0.08/-0 (.252 +.003/-0.000)
	47-SM-2321-K-R	47-SM-2421-K-R	47-SM-2321-N-R	47-SM-2421-N-R			2.3 (.09)	7.1 (.28)							

Other options available. For complete details on variety, part numbers, installation and specification, go to



[www.southco.com/47](http://www.southco.com/47)

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC


Dimensions in millimeters (inch) unless otherwise stated

# 4C-SM Captive Screws

Prism series · Surface Mount Technology (SMT) Style




## Recess Styles

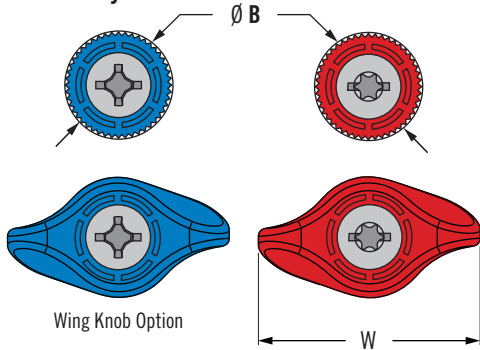


No. 2 Phillips Recess (M3,4-40) T10 TORX® / Slot Combination (M3,4-40)  
 No. 2 Phillips / Slot Recess (6-32) T15 TORX® / Slot Combination (6-32)

## Knob Height and Screw Projection

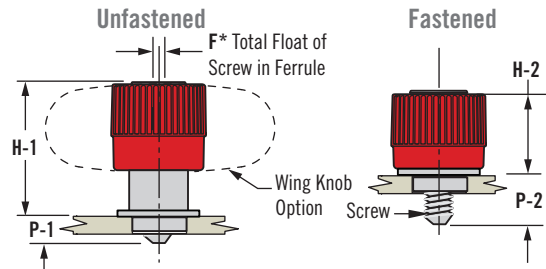

F\* Value represents float in unfastened position  
 Notes: P-1, P-2 Screw Projection measured from the top side of panel

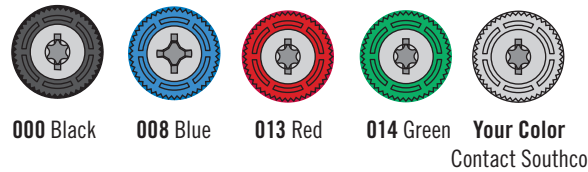

### Part Number

Specify Package  
 Indicate package option with last digit of the part number  
**Example**  
 4C-SM-1111-N000-R, Reel Package (as shown in table)  
 4C-SM-1111-N000-T, Tray Package


### Part Number

Specify Color  
 To indicate Color, change the three digits of the part number indicated below  
**Example**  
 4C-SM-1111-K000-R, black  
 4C-SM-1111-K008-R, blue


### Part Number

Specify Wing Knob Option  
 To indicate Wing Knob, change the K or N to W of the part number  
**Example**  
 4C-SM-1111-K000-R, Round Knob  
 4C-SM-1111-W008-R, Wing Knob

## PC Board Preparation

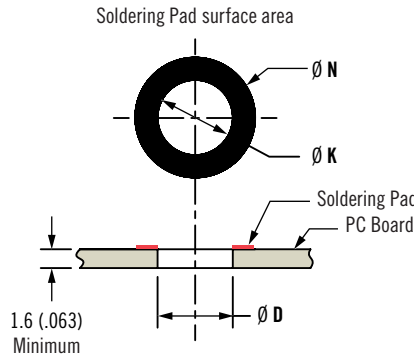

## Screw as Shipped in Reel Pack or Tray Pack



- For installation to PC Board material utilizing surface mount technology
- Designate access points with color
- Color match captive screws to your industrial design
- High strength screw for use with high torque drivers

## Material and Finish

Standoff: Steel, Tin plated  
 Knob: High heat resistant plastic  
 Screw: Hardened carbon steel, zinc plated, chromate, plus sealer  
 Internal spring: 300 series stainless steel passivated  
 Plug: Silicone rubber

## Installation Notes

Visit [www.southco.com](http://www.southco.com) for additional installation guidelines  
 To ensure you receive SOUTHCO® quality parts, look for the segmented circle

## Part Number

See table

Thread Size	Part Number (Reel package shown)														Panel Preparation					
	Knurled Head				Smooth Head				H-1	H-2	P-1	P-2	Ø B	Ø J	Ø E	F*	Ø K	Ø N	W	Ø D
	Phillips	TORX® / Slotted	Phillips	TORX® / Slotted																
M3 x 0.5	4C-SM-3111-K000-R	4C-SM-3411-K000-R	4C-SM-3111-N000-R	4C-SM-3411-N000-R	10.8 (.43)	8.6 (.34)	3.3 (.13)	5.5 (.22)	9.7 (.38)	5.5 (.217)	7.6 (.30)	0.7 (.03)	5.6 (.22)	8.6 (.34)	20 (.7878)	5.6 +0.08/-0 (.220 +.003/-0.000)				
	4C-SM-3121-K000-R	4C-SM-3421-K000-R	4C-SM-3121-N000-R	4C-SM-3421-N000-R																
4-40	4C-SM-1111-K000-R	4C-SM-1411-K000-R	4C-SM-1411-N000-R	4C-SM-1411-N000-R	10.8 (.43)	8.6 (.34)	3.3 (.13)	5.5 (.22)	9.7 (.38)	5.5 (.217)	7.6 (.30)	0.7 (.03)	5.6 (.22)	8.6 (.34)	20 (.7878)	5.6 +0.08/-0 (.220 +.003/-0.000)				
	4C-SM-1121-K000-R	4C-SM-1421-K000-R	4C-SM-1421-N000-R	4C-SM-1421-N000-R																
6-32	4C-SM-2311-K000-R	4C-SM-2411-K000-R	4C-SM-2311-N000-R	4C-SM-2411-N000-R	16.3 (.64)	11.7 (.46)	0.1 (.004)	4.6 (.18)	11.4 (.45)	6.2 (.244)	8.1 (.32)	0.8 (.03)	6.4 (.25)	10.2 (.40)	24 (.945)	6.4 +0.08/-0 (.252 +.003/-0.000)				
	4C-SM-2321-K000-R	4C-SM-2421-K000-R	4C-SM-2321-N000-R	4C-SM-2421-N000-R																



TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated

Other options available. For complete details on variety, part numbers, installation and specification, go to



[www.southco.com/4C](http://www.southco.com/4C)





# 52-SM Captive Screws

Miniature series · Surface Mount Technology (SMT) Style

- For installation to PC Board material utilizing surface mount technology
- Smaller footprint for limited space applications
- Heat treated steel screw for optimum strength

### Material and Finish

Screw: Hardened carbon steel, zinc plated, chromate, plus sealer  
 Internal spring: 300 series stainless steel, passivated  
 Standoff: Steel, Tin plated  
 Plug: Silicone rubber

### Installation Notes

Visit [www.southco.com](http://www.southco.com) for additional installation guidelines





To ensure you receive **SOUTHCO®** quality parts, look for the segmented circle.


### Part Number

See table

### Recess Styles

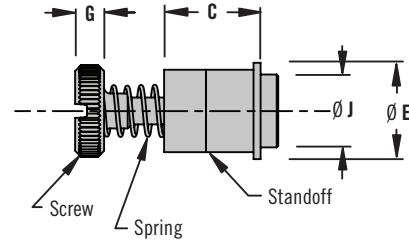


### Screw Height and Screw Projection

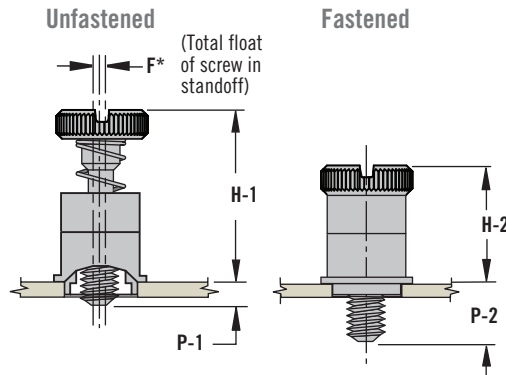


\* Value represents float in unfastened position  
 Notes: P-1, P-2 Screw Projection measured from the top side of panel

### PC Board Preparation

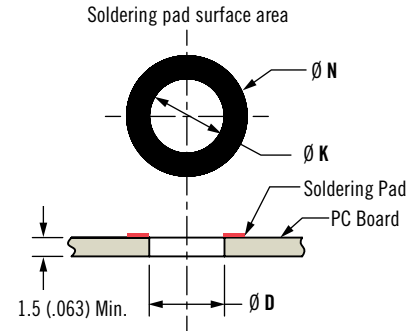

### Screw as Shipped in Reel Pack or Tray Pack



### 52 Captive Screws Miniature Series - SMT Style

#### Part Number

Specify Package  
 Indicate package option with last digit of the part number

#### Example

52-SM-1311-K-R: Reel Package (as shown in table)  
 52-SM-1311-K-T: Tray Package

Thread Size	Part Number (Reel package shown)				H-1	H-2	P-1	P-2	Ø B Knurled Head	Ø B Smooth Head	Ø J	Ø E	C	G	F*	Ø K	Ø N	Panel Preparation Ø D
	Knurled Head		Smooth Head															
	Phillips / Slotted	TORX®/Slotted	Phillips / Slotted	TORX®/Slotted														
M3 x 0.5	52-SM-3311-K-R	52-SM-3411-K-R	52-SM-3311-N-R	52-SM-3411-N-R	14	9.6	0.8 (.03)	5.3 (.21)	7	6.8	5.5	7.6	7	2.5	0.5	5.6	8.6	5.6 +0.08/-0 (.220 +.003/-.000)
	52-SM-3321-K-R	52-SM-3421-K-R	52-SM-3321-N-R	52-SM-3421-N-R	(.55)	(.38)	2.3 (.09)	6.8 (.27)	(.28)	(.27)	(.217)	(.30)	(.28)	(.1)	(.02)			
4-40	52-SM-1311-K-R	52-SM-1411-K-R	52-SM-1311-N-R	52-SM-1411-N-R	14	9.6	0.8 (.03)	5.3 (.21)	7	6.8	5.5	7.6	7	2.5	0.5	(.22)	(.34)	5.6 +0.08/-0 (.220 +.003/-.000)
	52-SM-1321-K-R	52-SM-1421-K-R	52-SM-1321-N-R	52-SM-1421-N-R	(.55)	(.38)	2.3 (.09)	6.8 (.27)	(.28)	(.27)	(.217)	(.30)	(.28)	(.1)	(.02)			
6-32	52-SM-2311-K-R	52-SM-2411-K-R	52-SM-2311-N-R	52-SM-2411-N-R	15.7	10.7	0.7 (.028)	5.8 (.23)	7.9	7.6	6.2	8.1	8.1	2.5	0.8	6.4	10.2	6.4 +0.08/-0 (.252 +.003/-.000)
	52-SM-2321-K-R	52-SM-2421-K-R	52-SM-2321-N-R	52-SM-2421-N-R	(.62)	(.42)	2.2 (.087)	7.4 (.29)	(.31)	(.30)	(.244)	(.32)	(.32)	(.1)	(.03)	(.25)	(.40)	

Other options available. For complete details on variety, part numbers, installation and specification, go to




[www.southco.com/52](http://www.southco.com/52)

TORX is a registered trademark of ACUMENT® Intellectual Properties, LLC

Dimensions in millimeters (inch) unless otherwise stated



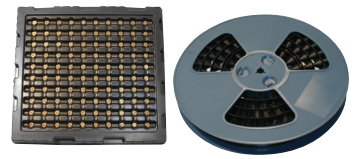

Southco Surface Mounted Technology (SMT) Captive Screws include installation and packaging features for installation onto PC Boards during the Reflow Process as a surface mounted device (SMD).


**SMT product installation is offered on these Southco Captive Screws for 4-40, 6-32 and M3 thread sizes:**

- 47 Styled Knob Series
- 4C Prism Series
- 52 Miniature Series

**Installation Features**


Each Southco SMT style captive screw includes a polyimide patch covering the screw head tool recess allowing for vacuum pick up during placement on the PC Board. The screw threads are protected from excess solder during the reflow process by a plug pre-assembled to the screw by Southco. The patch and plug are then removed after the final cool down phase.

Screw as Shipped in Reel or Tray Pack




**Preparing the PC Board to accept SMT Captive Screws**

- See literature for optimum soldering pad surface area for the specific Southco Captive Screw being utilized



**Packaging Features/Options**

- Tray Pack
- Reel Pack



Tray Pack



Reel Pack

**Reflow Process**

- Reflow of Solder
  - Pre-heat
  - Soak
  - Reflow
  - Cooling
- Cleaning
  - Remove excess solder paste



# 47/4C Captive Screws

## ATCA captive screws

- M3 thread
- No. 2 Phillips recess
- Color match available

### Material and Finish

Screw, ferrule and internal spring stainless steel, knob aluminum or PC/ABS

### Performance Details

Flammability rating: UL94-V0  
ATCA R3.0 compliant screw

### Installation Notes

Please refer to installation drawings on [www.southco.com](http://www.southco.com) for reference on dimensions **B\***,  $\varnothing$  **D\*** and  $\varnothing$  **Z\***

**F\*** indicates maximum float in the unfastened position

### Part Number

See table

Specifying Color:


To indicate color, change the last three digits of the part number.

Example:


47-99-945-1P0-K000, black

47-99-945-1P0-K013, red


### Metal Version

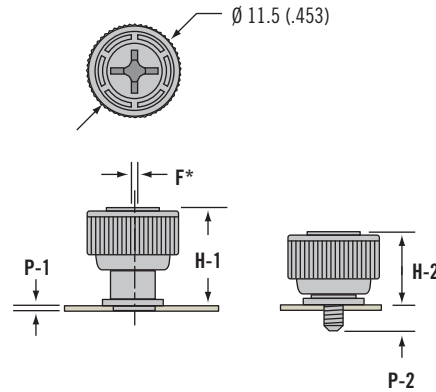


### Overmolded Version

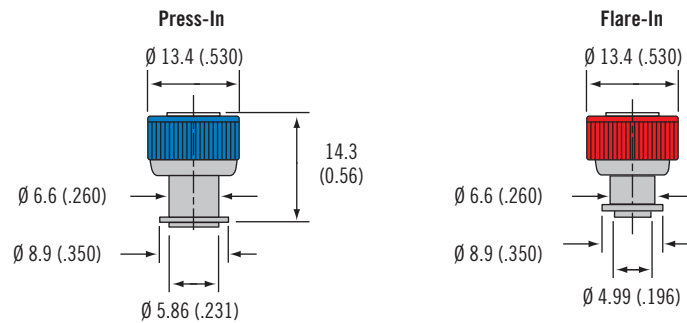


000 Black




008 Blue



013 Red



014 Green



Your color  
(contact Southco)

Series	Installation Method	Panel Thickness			Part Number No. 2 Phillips	H-1	H-2	P-1	P-2	F*	Panel Preparation	
		A Min.	A Max.	B*							$\varnothing$ D*	$\varnothing$ Z*
ATCA compliant (Metal Version)	Press-in	0.9 (.036)	~	~	47-99-945-1P0	14.3 (.56)	10.1 (.40)	1.0 (.39)	5.0 (.20)	1 (.039)	5.95 ± 0.04 (.234 ± .002)	3.2 <sup>+0.2</sup> <sub>-0.1</sub> (.125 <sup>+0.008</sup> <sub>-.004</sub> )
	Flare-in	0.8 (.031)	1.5 (.060)	0.4 (.016)	47-99-944-1F1	14.3 (.56)	10.1 (.40)	1.0 (.39)	5.0 (.20)	1 (.039)	5.1 <sup>+0.1</sup> <sub>-0</sub> (.20 <sup>+0.004</sup> <sub>-0</sub> )	3.0 <sup>+0.1</sup> <sub>-0</sub> (.118 <sup>+0.004</sup> <sub>-.000</sub> )
ATCA compliant (Overmolded Version)	Press-in	0.9 (.036)	~	~	47-99-945-1P0-K000	14.3 (.56)	10.1 (.40)	1.0 (.39)	5.0 (.20)	1 (.039)	5.95 ± 0.04 (.234 ± .002)	3.2 <sup>+0.2</sup> <sub>-0.1</sub> (.125 <sup>+0.008</sup> <sub>-.004</sub> )
	Flare-in	0.8 (.031)	1.5 (.060)	0.4 (.016)	47-99-944-1F1-K000	14.3 (.56)	10.1 (.40)	1.0 (.039)	5.0 (.20)	1 (.039)	5.1 <sup>+0.1</sup> <sub>-0</sub> (.20 <sup>+0.004</sup> <sub>-0</sub> )	3.0 <sup>+0.1</sup> <sub>-0</sub> (.118 <sup>+0.004</sup> <sub>-.000</sub> )



[www.southco.com/P7](http://www.southco.com/P7)

Dimensions in millimeters (inch) unless otherwise stated

**southco**  
CONNECT · CREATE · INNOVATE


# Installation Guidelines

## for *SOUTHCO*® Self-Clinching products

Self-clinching product installation is offered on these *SOUTHCO*® products, making them easy-to-use captive panel fasteners:

- Captive Screws
- Receptacles for Quarter-turn Fasteners
- Receptacles for Fast-lead Thread Screws

When pressed into a properly prepared hole, self-clinching captive fasteners cold-flow (move) the panel material into the retaining groove of the fastener. This material then retains the fastener in the panel.

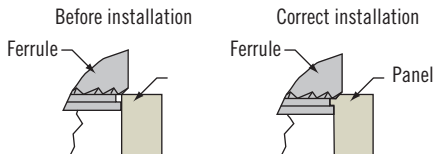

### Successful press-in installations depend on:


#### Material:

The hardness of the panel material must not exceed *SOUTHCO*® recommendations. If the panel is too hard, the fastener will not install correctly.

#### Installation Holes:


Mounting holes may be drilled, punched, or cast.

- Hole edge: the top hole edge must be sharp but with no broken edges.



Do not chamfer or debur edge.

- Punched holes: use a punch and die with a small clearance to minimize the rollover and fracture angle.
- Hole diameter: measure the hole diameter at the panel surface on the side on which the fastener will be installed. The diameter must be within *SOUTHCO*® specifications for that product.




- If the hole is too large, not enough material will flow into the

retaining groove and the fastener may not be retained adequately.

- If the hole is too small, the fastener will not fit and installation may become difficult and unsafe.
- Hole distance from the edge of panel: the minimum recommended distance is 1.5 x the diameter of the mounting hole, unless otherwise indicated.

- Spring-loaded Plungers
- Captive Nuts
- Threaded Inserts

- Installing too close to the edge will cause the material to flow in the opposite direction, deforming the edge of the panel. To install closer to the edge, you may need to restrain the panel edge.

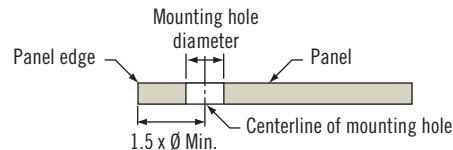

#### Panel Thickness:

The thickness of the panel at the mounting hole location must meet or exceed Southco's stated minimum recommendations.

If the material is too thin, panel deformation and/or damage to the fastener may result.

### Installation is fast and easy if you follow these tips:

How to install: Use the recommended force where noted and a proper back-up tool.

- use any parallel-acting press
- use a punch whose diameter is larger than the head of the fastener

Installation Force: Proper installation requires an even distribution of adequate force. It does not depend on the distance the fastener is pressed into the panel.

- Southco does not recommend using a hammer. The impact force does not provide an even distribution of force to allow the panel material to completely flow into the fastener's retaining groove.
- Installation force varies from application to application, depending on the criteria noted above.
- On parts without a collar to provide a hard stop, press-in until the edge of the knurl is just barely visible.

#### When to Install:

Installation is recommended after plating or finishing has been applied to the panel.

The hole diameter must meet specifications before finish or plating is applied.

- Do not over-install parts. This interrupts the material and will reduce the retention strength.

