
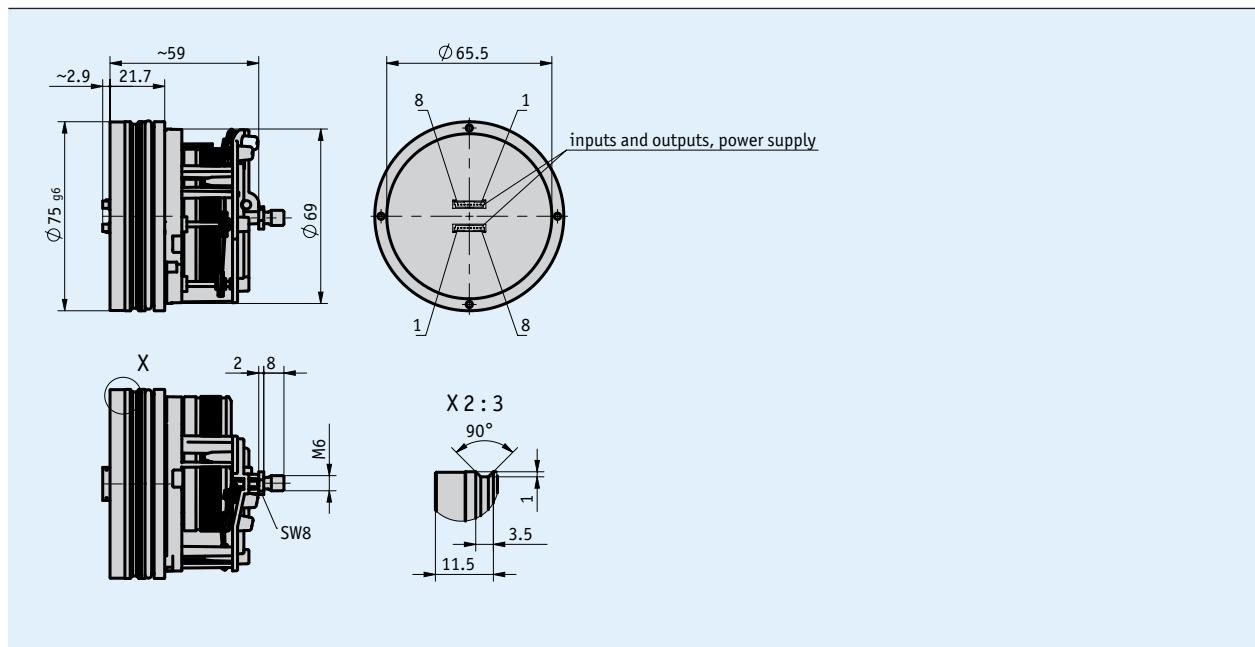


Profile

- Measuring range 0 ... 2500 mm (98.42 inches)
- Absolute measuring system
- Pressure-resistant up to 350 bar, pressure peaks up to 450 bar
- High degree of flexibility, adjustable to all measuring lengths thanks to teach-in
- Redundant interfaces available
- Safety version usable up to Performance Level d
- Analog, CANopen, SAE J1939, CANopen Safety interfaces

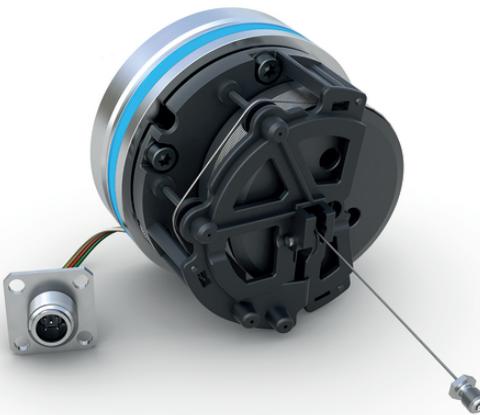

Mechanical data

Feature	Technical data	Additional information
Flange	aluminum	sealing ring (HNBR)
Housing	synthetic	PA66
Wire design	Ø 0.45 mm	steel rope (stainless)
Extension force	≥ 3.9 N	
Acceleration	≤ 24 m/s ²	
Weight	~ 0.35 kg	

Electrical data

Analog interface

Feature	Technical data	Additional information
Operating voltage	9 ... 32 V DC	with output 0 ... 5 V, 0.5 ... 4.5 V, 0.25 ... 4.75 V, 1.0 ... 4.9 V, reverse polarity protected
	12 ... 32 V DC	with output 0 ... 10 V, reverse polarity protected
	12 ... 32 V DC	with output 0 ... 20 mA, 4 ... 20 mA, but UB > Uload + 2.0 V, reverse polarity protected
	24 V DC ±20 %	industrial hydraulics, only with CE, reverse polarity protected
Current consumption	<40 mA	at 24 V DC, per encoder
	<80 mA	at 12 V DC, per encoder
Power input	<1 W	without load, per encoder
Digital inputs	2	limit inputs (not redundant)
	4	limit inputs (redundant)
Input signal level high	>8.4 V	
Input signal level low	<2.8 V	
Output voltage	0 ... 10 V	load current <10 mA
	0 ... 5 V	load current <10 mA
	0.5 ... 4.75 V	load current <10 mA
	0.25 ... 4.75 V	load current <10 mA
Output current	1 ... 4.9 V	load current <10 mA
	0 ... 20 mA	load ≤500 Ω
	4 ... 20 mA	load ≤500 Ω
Linearity tolerance	±0.25 %	2500 mm measurement length
Settling time	<150 ms	
Type of connection	plug connection system	KV1H accessory

CANopen interface

Feature	Technical data	Additional information
Operating voltage	10 ... 32 V DC	reverse polarity protected
	24 V DC ±20 %	industrial hydraulics, only with CE, reverse polarity protected
Current consumption	<40 mA	at 24 V DC, per encoder
	<80 mA	at 12 V DC, per encoder
Power input	<1 W	per encoder
Linearity tolerance	±0.25 %	2500 mm measurement length
Interface	according to ISO 11899, not isolated	CANopen, CIA 406, CIA 301, CIA 305
Address	adjustable	per SDO or Layer Setting Service (LSS)
Baud rate	20 kBit/s	
	50 kBit/s	
	125 kBit/s	
	250 kBit/s	
	500 kBit/s	
	800 kBit/s	
	1 MBit/s	
Cycle time	<1.5 ms	
Starting time	<150 ms	
Type of connection	plug connection system	KV1H accessory

Interface CANopen Safety

Feature	Technical data	Additional information
Operating voltage	9 ... 32 V DC	reverse polarity protected
	24 V ±20 %	industrial hydraulics, only with CE, reverse polarity protected
Current consumption	<40 mA	at 24 V DC, per encoder
	<80 mA	at 12 V DC, per encoder
Power input	<1 W	
Linearity tolerance	±0.25 %	2500 mm measurement length
Interface	ISO 11898, not galvanically insulated	CANopen, CIA 406, CIA 301, CIA 305
Address	adjustable	per SDO or Layer Setting Service (LSS)
Baud rate	20 kBit/s	
	50 kBit/s	
	125 kBit/s	
	250 kBit/s	
	500 kBit/s	
	800 kBit/s	
	1 MBit/s	
Cycle time	<1.5 ms	
Starting time	<150 ms	
Type of connection	plug-in connection system	KV1H accessory

System data

Feature	Technical data	Additional information
Scanning	magnetic	
Resolution	12 Bit	analog output
	0.1 mm	CANopen, SAE J1939, CANopen Safety
Repeat accuracy	±0.15 mm	unidirectional
Measuring range	0 ... 2500 mm	measuring range flexibly usable between 0...2500 mm Measurement area can be used flexibly between 0 ... 2500 mm
Travel speed	≤2 m/s	
Failure rate	290 year(s)	analog output, at 40 °C (MTBF) EN/IEC61709 (SN29500)
	240 year(s)	CANopen, at 40 °C (MTBF) EN/IEC61709 (SN29500)
	540 year(s)	analog not redundant, at 40 °C (MTBF) EN/IEC61709 (SN29500)
	460 year(s)	CAN not redundant, at 40° C (MTBF) EN/IEC61709 (SN29500)
	170 year(s)	CAN Safety redundant, at 40° C (MTBF) EN/IEC61709 (SN29500)

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 105 °C	electronics
	-30 ... 105 °C	mechanics
Storage temperature	-40 ... 85 °C	
Relative humidity	100 %	condensation admissible in the mounted and plugged condition
Operating pressure	<350 bar	
Overload pressure	<450 bar	
EMC	EN 61326-1	immunity requirement of industry, class B emission limit
Protection category	IP67	EN 60529, installed with KV1H and suitable mating plug
	IP69K	built in the cylinder (IP69K), with KV1H and suitable mating connector

Order

■ Ordering table

Feature	Ordering data	Specification	Additional information
Measuring range	...	A 1500, 2000, 2500 in mm	
Ambient conditions	MH CE	B mobil hydraulics Industrial hydraulics	
Interface	0/5V 0/10V 0.25/4.75V 0.5/4.5V 1.0/4.9V 0/20mA 4/20mA CAN CANs	C 0 ... 5 V 0 ... 10 V 0.25 ... 4.75 V 0.5 ... 4.5 V 1.0 ... 4.9 V 0 ... 20 mA 4 ... 20 mA CANopen CANopen Safety	voltage output voltage output voltage output voltage output voltage output current output current output CANopen CANopen Safety
Redundancy	NR R	D not redundant redundant	

■ Order key

SGH25 - - GW6 - - - - M1 - DS - S

A B C D

Scope of delivery: SGH25, Quick Start Guide