

Series MX filter-regulators

MX2 ports: G3/8, G1/2, G3/4 - MX3 ports: G3/4, G1

Modular

Bowl with technopolymer cover and bayonet-type mounting



- » Filtering between 25 µm or 5 µm
- » Available versions: with built-in gauge or with ports for gauge
- » Lockable knob with closure
- » Bowl locking system reducing the risk of accidents

The Series MX has been realized to offer a multi-sector solution that guarantees saving in terms of installation time, space and costs. A special configurator, available on Camozzi website at <http://catalogue.camozzi.com> (sec. Configurators), allows the customer to choose the most suitable solution for his application, selecting single components or by configuring assembled FRLs.

Series MX filter-regulators integrate filter and pressure reducer in one unit. They are, therefore, compact and suitable for pre-filtering functions. Available with or without draining (relieving), they are equipped with a valve diaphragm for a direct pressure regulation and with an integrated condensate drainer, manual or automatic. Moreover, they are equipped with a built-in pressure gauge.

GENERAL DATA


Construction	modular, compact with filtering element in HDPE
Materials	see TABLE OF MATERIALS (pag. 3/1.30.02)
Ports	MX2: G3/8 - G1/2 - G3/4 MX3: G3/4 - G1
Condensate capacity	MX2: 55 cc MX3: 85 cc
Mounting	vertical in-line wall-mounting (by means of clamps) panel mounting
Operating temperature	-5°C + 50°C up to 16 bar (with the dew point of the fluid lower than 2°C at the min. working temperature) -5°C + 60°C up to 10 bar (with the dew point of the fluid lower than 2°C at the min. working temperature)
Porosity of filtering element	25 µm (standard) 5 µm
Draining of condensate	MX2: manual-semi automatic (standard), automatic, depressurization protected, without drain with port G1/8 MX3: manual-semi automatic (standard), without drain with port G1/8
Operating pressure	0,3 ÷ 16 bar ((with automatic drain 1,5 ÷ 12)
Nominal flow	see FLOW DIAGRAMS (pag. 3/1.30.03)
Fluid	compressed air
Pressure gauge	version with built-in pressure gauge (standard) version with G1/4 ports for pressure gauge (MX3 only) version with G1/8 ports for pressure gauge (MX2 only)

CODING EXAMPLE

MX	2	-	3/8	-	FR	0	0	0	4	-	LH
-----------	----------	----------	------------	----------	-----------	----------	----------	----------	----------	----------	-----------


MX	SERIES
2	SIZE: 2 = G3/8 - G1/2 - G3/4 3 = G3/4 - G1
3/8	PORT: 3/8 = G3/8 1/2 = G1/2 3/4 = G3/4 1 = G1
FR	FILTER-REGULATOR
0	FILTERING ELEMENT WITH DESIGN TYPE: 0 = 25 µm with relieving (standard) 1 = 5 µm with relieving 2 = 25 µm without relieving (with semiautomatic-manual drain only) 3 = 5 µm without relieving (with semiautomatic-manual drain only)
0	DRAINING OF CONDENSATE: 0 = semiautomatic-manual drain (standard) 3 = automatic drain 5 = depressuring drain, protected 8 = without drain, with port G1/8
0	OPERATING PRESSURE: 0 = 0,5 ÷ 10 bar (standard) 4 = 0 ÷ 4 bar 7 = 0,5 ÷ 7 bar (MX2 only)
4	PRESSURE GAUGE: 0 = without pressure gauge (with threaded port) 2 = with built-in pressure gauge 0-6 and working pressure 0 ÷ 4 bar 3 = with built-in pressure gauge 0-10 and working pressure 0 ÷ 7 bar (MX2 only) 4 = with built-in pressure gauge 0-12 and working pressure 0,5 ÷ 10 bar (standard)
LH	FLOW DIRECTION: = from left to right (standard) LH = from right to left

For the assembly of a single component with fixing flanges or wall-mounting, see the section "FRL Series MX Assembled" (pag. 3/1.50.01)

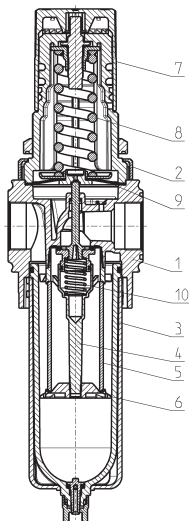
Filter-regulators Series MX - materials


PARTS	MATERIALS
1 = Body	Aluminium
2 = Covering	Polyacetal
3 = Bowl with technopolymer cover	Polycarbonate/Polyamide
4 = Valve guide	Polyacetal
5 = Filtering element	Polyethylene
6 = Separation deflector	Polyacetal
7 = Knob	Polyamide
8 = Upper spring	Zinc-plated steel
9 = Diaphragm	NBR
10 = Lower spring	Stainless steel
Seals	NBR

MX2 FLOW DIAGRAMS

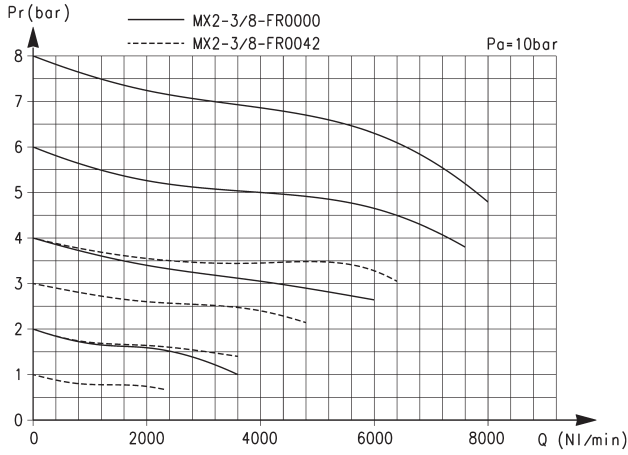


Pr = Regulated pressure
 Q = Flow
 Pa = Inlet pressure

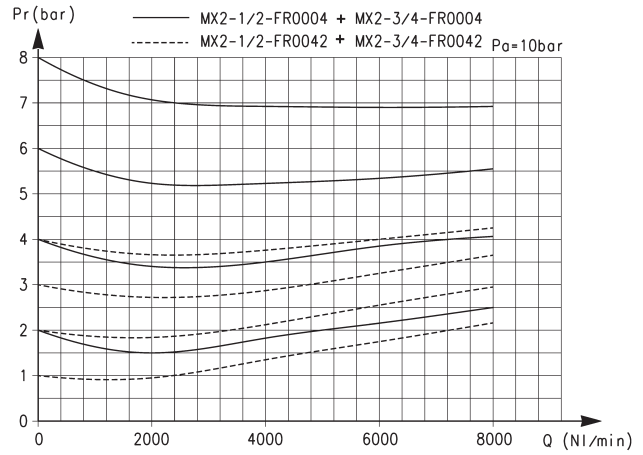


Pr = Regulated pressure
 Q = Flow
 Pa = Inlet pressure

MX3 FLOW DIAGRAM

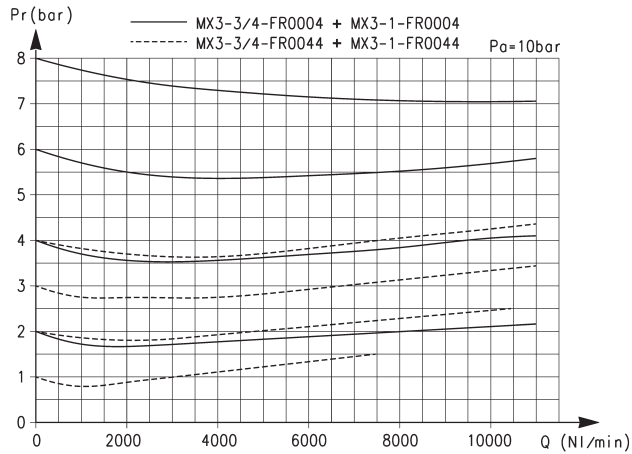

Pr = Regulated pressure
 Q = Flow
 Pa = Inlet pressure

PNEUMATIC SYMBOLS

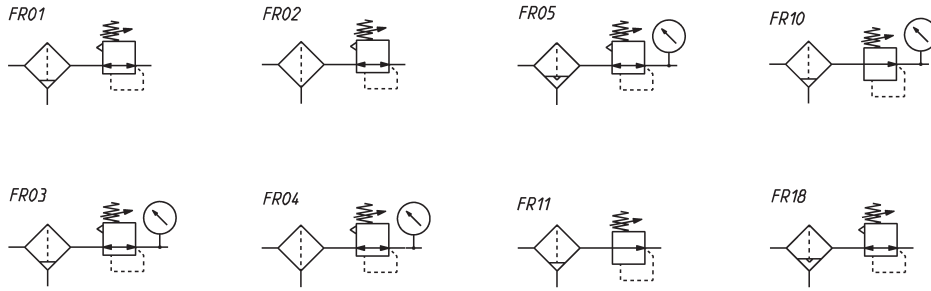


FR01 = filter-regulator with relieving and manual drain
 FR02 = filter-regulator with relieving and without drain
 FR03 = filter-regulator with relieving, manual drain and pressure gauge
 FR04 = filter-regulator with relieving, without drain and with pressure gauge

FR05 = filter-regulator with relieving, automatic drain and pressure gauge
 FR10 = filter-regulator with manual drain, without relieving and with pressure gauge
 FR11 = filter-regulator with manual drain and without relieving
 FR18 = filter-regulator with relieving and automatic drain

3

TREATMENT

Filter-regulators Series MX - dimensions

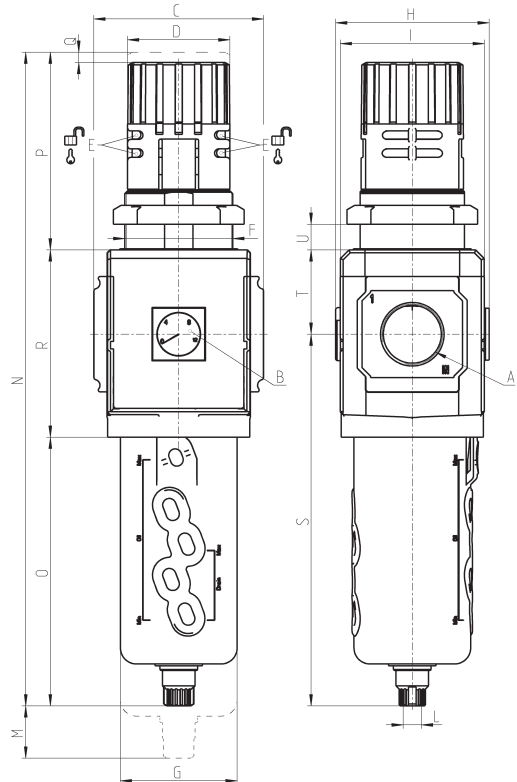

Mod.	A	B (bar)	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	U	Weight (Kg)
MX2-3/8-FR0004	G3/8	0 ÷ 12	70	45	Ø 4.7	M47x1,5	55,5	74,5	68	G1/8	66	290	127	78	5	85	174,5	37,5	0 ÷ 16	0.8
MX2-1/2-FR0004	G1/2	0 ÷ 12	70	45	Ø 4.7	M47x1,5	55,5	74,5	68	G1/8	66	290	127	78	5	85	174,5	37,5	0 ÷ 16	0.8
MX2-3/4-FR0004	G3/4	0 ÷ 12	70	45	Ø 4.7	M47x1,5	55,5	74,5	68	G1/8	66	290	127	78	5	85	174,5	37,5	0 ÷ 16	0.8
MX3-3/4-FR0004	G3/4	0 ÷ 12	89,5	54	Ø 4	M57x1,5	61,5	81	76	G1/8	75	345	142	104	5	99	196,5	44,5	0 ÷ 20	1.3
MX3-1-FR0004	G1	0 ÷ 12	89,5	54	Ø 4	M57x1,5	61,5	81	76	G1/8	75	345	142	104	5	99	196,5	44,5	0 ÷ 20	1.3