



GELENK 20/40

PIVOT JOINT 20/40

Ausführung mit einstellbarer Friktion, Aluminiumdruckguss

Beschreibung zur beweglichen Verbindung von zwei Profilen oder Flächenelementen, mit separaten Nutfixierungen für Nut 5 und Nut 6; mittels der Schrauben kann der Reibungswiderstand des Gelenkes stufenlos reguliert, bzw. das Gelenk in einer definierten Position fixiert werden

Material Aluminiumdruckguss

Oberfläche alufarbig lackiert

Liefereinheit 10 Stück

Extras weitere Oberflächen, weitere Farben auf Anfrage

Model With adjustable friction, die-cast aluminum


Description To make a pivoting connection between two profiles or panels; with separate locating pins for slot 5 and 6; by tightening or loosening the screws you can seamlessly regulate the functionality of the joint or you can fix it in one position

Material Aluminum die-cast

Surface Alu color laquered

Pack Quantity 10 pieces

Specials Other surfaces, other colors on request

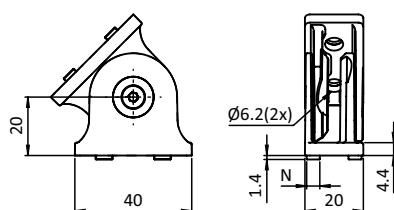

Gelenk 20/40
Pivot Joint 20/40

N	Öffnungswinkel Opening Angle	Gewicht [g] Weight [g]	Teil-Nr. Part #
—	154°	43.5	093GA2040A
5	154°	44.5	093GA2040AN05
6	154°	44.5	093GA2040AN06

