
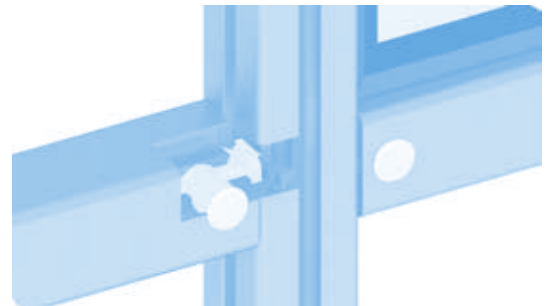



ZENTRALVERBINDER
CENTRAL CONNECTOR

<p>Ausführung Stahl, Profil 40, Nut 8</p> <p>Beschreibung zur rechtwinkligen Verbindung von zwei Aluminiumprofilen; zur Montage muss ein 28 mm tiefes Sackloch mit $\varnothing 14,2$ mm seitlich und ein 20 mm tiefes Sackloch mit $\varnothing 8,2$ mm stirnseitig gebohrt werden; inklusive Abdeckkappe</p> <p>Material Verbinder: Stahl Klammer: Edelstahl Abdeckkappen: Kunststoff PP</p> <p>Farbe Abdeckkappe: grau \approx RAL 7042</p> <p>Liefereinheit 10 Stück</p> <p>Hinweis passende Radiendichtung siehe Seite 522; Beim Verbau mit Radiendichtung sollte das Abstandsmaß der Bohrung um die Dicke der Radiendichtung verringert werden</p>	<p>Model Steel, profile 40, slot 8</p> <p>Description To connect two aluminum profiles at right angles; before the application a 28 mm deep blind hole with $\varnothing 14,2$ mm lateral and a 20 mm deep blind hole with $\varnothing 9,0$ mm frontal must be drilled; with cover cap</p> <p>Material Connector: Steel Clamp: Stainless steel Cover caps: Plastic PP</p> <p>Color Cover cap: gray \approx RAL 7042</p> <p>Pack Quantity 10 pieces</p> <p>Tip Compatible radius seal see page 522; If used with the radius seal, the distance between the bore hole should be reduced by the thickness of the radius seal</p>
---	---

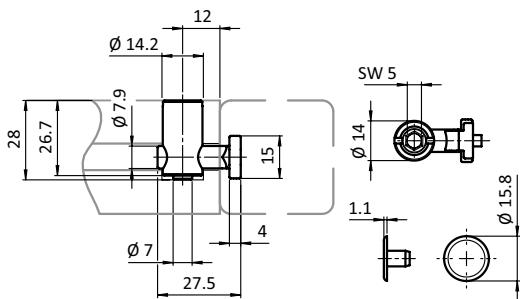

Zentralverbinder Central Connectors	N	Gewicht [g] Weight [g]	Profil Profile	Teil-Nr. Part #
	8	42.8	I	099B081408