

# MOUNTING PLATE FOR LAD

INSTRUCTION

LAD-SPT




- Features**  
 A plate to reinforce the surface where the LAD Lift-Assist Damper or LAD-ST Arm Unit is mounted.
- Remarks**
  - Use the single-side type when the lateral plate thickness is 20 mm or greater, and the double-sided type if the thickness is 15 - 19 mm.
  - Two plates are required when using the double-sided type.
  - Cannot be used with the LAD-DP Spacer for thick plates or the LAD-BKT Bracket for Back Mount.

**Parts Included**  
Size M4 x 8 binding screws

- Recommended Screw**
- Single-side type: Size 5 x 20 or larger cross-recessed truss tapping screws
  - Double-sided type: Size M5 cross-recessed truss screws and flat washers, spring washers and nuts for M5 screws

Application Example

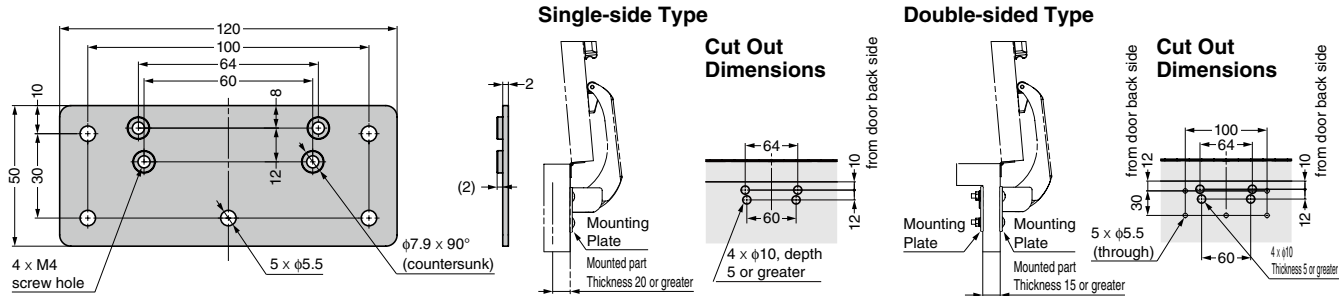

CAD	Item Code	Item Name	Material	Weight (g)	Box (pcs)	Carton (pcs)
	170-034-754	LAD-SPT	Stainless Steel	130	10	50