SUGATSUNE

STAINLESS STEEL LONG-STEM LEVELING GLIDE













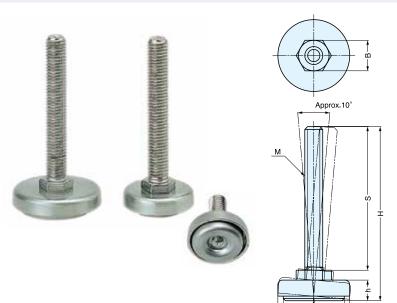

- Double structure of cover/bolt and base allows easy height adjustment without lifting the leg.
- Swivels approximately 10° to compensate for uneven floors.
- 304 stainless steel construction is ideal for humid environments or applications where corrosion is an issue.



Part Name	Material	Finish		
Body		Satin		
Cover	304 Stainless Steel			
Base		Plain		

Item No.	М	D	d	Н	h	S	В	Load Capacity (kg)	Weight (g)	Box (pcs)	Carton (pcs)
MKPLS-32/10/80	M10×1.50	32 (1-17/64")	27 (1-1/16")	96 (3-25/32")	10.5 (13/32")	00		200 (440 lbs)	79	20	240
MKPLS-40/12/80	M12×1.75	40 (1-37/64")	34 (1-11/32")	97 (3-13/16")		80 (3-5/32")	17 (43/64")	300 (660 lbs)	125	30	240
MKPLS-50/12/80			44 (1 47/6411)	- (,	11.5 (29/64")	(0-0/02)	(43/04)	340 (748 lbs)	150	20	160
MKPLS-50/16/78	M16×2.00	50 (1-31/32")	44 (1-47/64)	100 (3-15/16")		78.5 (3-3/32")	24 (15/16")	320 (704 lbs)	220	15	120

STAINLESS STEEL LONG-STEM LEVELING GLIDE














MKRLS







- Leveling glide with elastomer base prevents skidding.
 Double structure of cover/bolt and base allow
- Double structure of cover/bolt and base allows easy height adjustment without lifting the leg.
- Swivels approximately 10° to compensate for uneven floors.

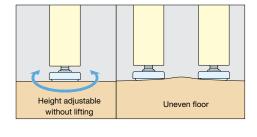

Part Name	Material	Finish		
Body	304 Stainless Steel	Satin		
Base	Elastomer	Black		

Item No.	M	D	d	Н	h	S	В	Load Capacity (kg)	Weight (g)	Box (pcs)	Carton (pcs)
MKRLS-32/10/80	M10×1.50	32 (1-17/64")	27 (1-1/16")	96 (3-25/32")	10.5 (13/32")		17	200 (440 lbs)	79	30	240
MKRLS-40/12/80	M10v1 75	40 (1-37/64")	34 (1-11/32")	97 (3-13/16")		80 (3-5/32")	(4-3/64")	300 (660 lbs)	125	30	240
MKRLS-50/12/80	M12×1.75		44 (1-47/64")	' /	11.5 (29/64")	(0 0/02)	(+ 0/0+)	340 (748 lbs)	150	20	160
MKRLS-50/16/78	M16×2.00	0 50 (1-31/32)		100 (3-15/16")		78.5 (3-3/32")	24 (15/16")	320 (704 lbs)	220	15	120