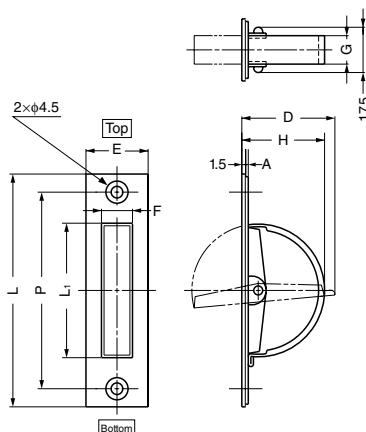


## STAINLESS STEEL HATCH PULL

TEST  
METHOD 2STAINLESS  
304  
STEEL

STAINLESS


HR

## Parts Included

- HR-90S: Countersunk head wood screw 3.5x22 (SUS)
- HR-110S & HR-135S: Countersunk head wood screw 3.5x25 (SUS)

| Item Code   | Item Name | Material                 | Finish | L   | L <sub>1</sub> | P   | H  | D  | A   | E  | F    | G  | Load Capacity | Weight  | Box  | Carton |         |
|-------------|-----------|--------------------------|--------|-----|----------------|-----|----|----|-----|----|------|----|---------------|---------|------|--------|---------|
| 100-012-614 | HR- 90S   | Stainless Steel (SUS304) | Satin  | 90  | 52             | 76  | 32 | 36 | 1   | 24 | 12   | 11 | 127 N         | 13 kgf  | 49 g | 30 pcs | 300 pcs |
| 100-012-615 | HR-110S   | Stainless Steel (SUS304) | Satin  | 110 | 64             | 94  | 38 | 42 | 1   | 24 | 12   | 11 | 98 N          | 10 kgf  | 59 g | 20 pcs | 200 pcs |
| 100-012-817 | HR-135S   | Stainless Steel (SUS304) | Satin  | 135 | 90             | 115 | 50 | 55 | 1.2 | 25 | 12.2 | 12 | 74 N          | 7.5 kgf | 88 g | 15 pcs | 150 pcs |

## STAINLESS STEEL HATCH PULL

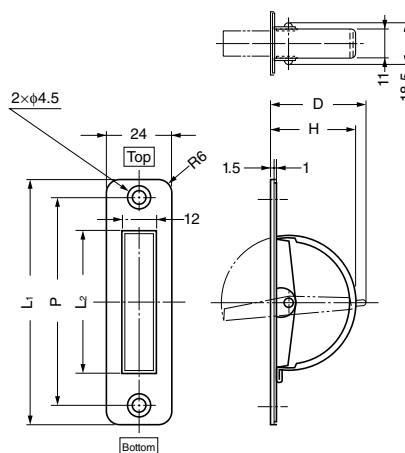TEST  
METHOD 2STAINLESS  
304  
STEEL

STAINLESS

HR-RS

## Parts Included


- Countersunk head wood screw 3.5x22 (SUS)

| Item Code   | Item Name | Material                 | Finish | L <sub>1</sub> | L <sub>2</sub> | P  | H  | D  | Load Capacity |        | Weight | Box    | Carton  |
|-------------|-----------|--------------------------|--------|----------------|----------------|----|----|----|---------------|--------|--------|--------|---------|
| 100-019-058 | HR- 90RS  | Stainless Steel (SUS304) | Satin  | 90             | 52             | 76 | 32 | 36 | 127 N         | 13 kgf | 46 g   | 30 pcs | 300 pcs |
| 100-019-059 | HR-110RS  | Stainless Steel (SUS304) | Satin  | 110            | 64             | 94 | 38 | 42 | 98 N          | 10 kgf | 55 g   | 20 pcs | 200 pcs |



## RECESSED LEVER PULL



## Cut Out Dimensions



## Bracket for Sheet Metal (example)

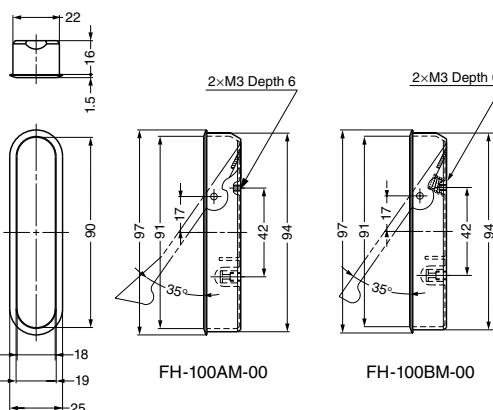

STEEL

## FH-100AM, FH-100BM

## Features

- FH-100AM (Stay type) will stay open after fingers are no longer holding the lever.
- FH-100BM (Return type) will automatically close after fingers are not holding the lever.
- Recommended for doors over 25mm thick.
- When installing on sheet metal, please prepare a separate bracket for sheet metal.

## Parts Included

- Truss head screw M3x14

| Item Code   | Item Name   | Material         | Finish |              | Weight  | Box    | Carton |
|-------------|-------------|------------------|--------|--------------|---------|--------|--------|
|             |             |                  | Body   | Handle       |         |        |        |
| 100-010-444 | FH-100AM-00 | Zinc Alloy (ZDC) | Nickel | Satin Nickel | 103.5 g | 12 pcs | 72 pcs |
| 100-010-445 | FH-100BM-00 | Zinc Alloy (ZDC) | Nickel | Satin Nickel | 103.5 g | 12 pcs | 72 pcs |