

RECESSED HOOK

TEST METHOD 18

NF-60, NF-60D



NF-60

Features

- Hook comes in two different types: spring-loaded and soft-self closing.
- End of arm is equipped with small protrusion to prevent items from falling off.
- When closed, there is very little protrusion, making it safer and visually appealing.
- When combined with the NF-50 bracket, can be used on sheet metal.
- Available in special colours, please contact us for details.

Remarks

Please take off the cushion rubber when installing on a wooden panel.

Option

NF-50: Bracket for sheet metal applications

Recommended screws

For wooden board

- Thickness 25 - 29mm : Countersunk head tapping screw 5x20
- Thickness min 30mm : Countersunk head tapping screw 5x25



NF-60D-GR


NF-60D-SL

NF-60D-MSL


Video Link




NF-60

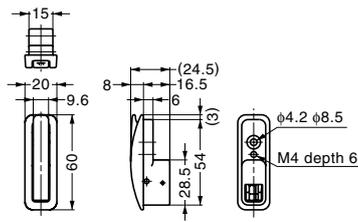


NF-60 Cut Out Dimensions

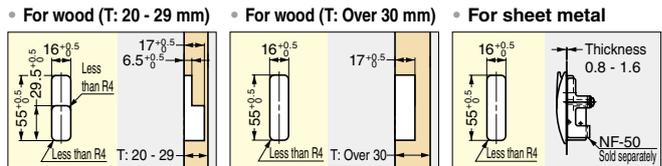

NF-60D

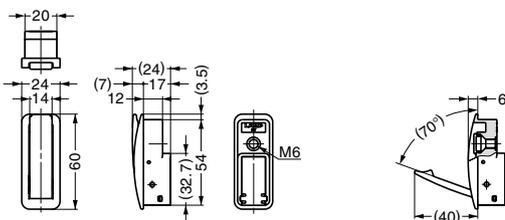

NF-60D Cut Out Dimensions

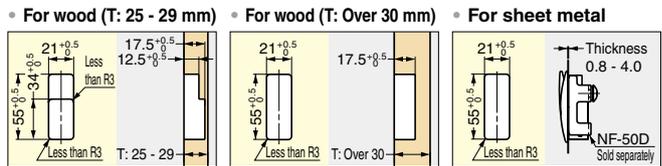

Item Code	Item Name	Damper	Bracket	Material	Finish	Load Capacity	Weight(g)	Box(pcs)	Carton(pcs)	
110-020-067	NF-60	Without	NF-50	Aluminium Alloy	Dark Grey	196 N	20 kgf	31	10	200
110-022-191	NF-60D-GR	With	NF-50D	Aluminium Alloy	Dark Grey	294 N	30 kgf	49	10	200
110-024-598	NF-60D-SL	With	NF-50D	Aluminium Alloy	Silver	294 N	30 kgf	49	10	200
110-027-560	NF-60D-MSL	With	NF-50D	Aluminium Alloy	Silver Metallic	294 N	30 kgf	49	10	200