



CORNER FASTENER (W/LOCK)



STF-C64A, B

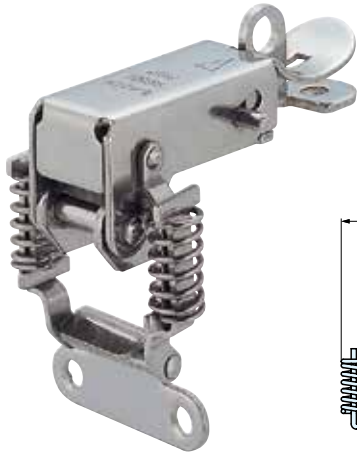


STF-C64A

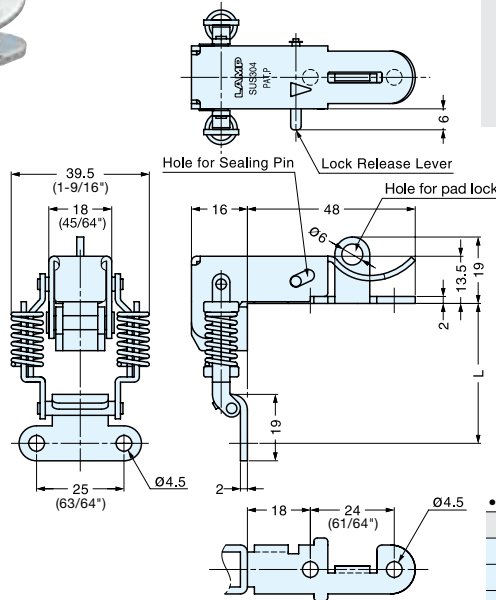

- Latch mounts on corner to draw perpendicular surfaces together.
- Designed to allow front operation.
- Locks when fastened to prevent accidental release.
- Pull lever and lift latch to open.
- Available with or without spring.

STF-C64B
(To be used with rubber gasket)

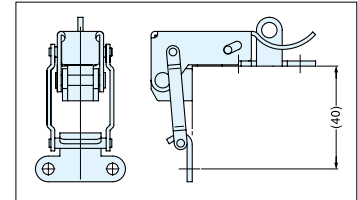

•STF-C64A

L (mm)	Clamping Force kgf±1.5 (lbs±3.3)
40 (1-37/64")	0
41 (1-39/64")	6.0 (13.2 lbs)
42 (1-21/32")	7.3 (16.0 lbs)
43 (1-11/16")	8.6 (19.0 lbs)
44 (1-47/64")	9.9 (21.8 lbs)

*Maximum "L" dimension is 44mm.


Item No.	Spring	Weight (g)	Box (pcs)	Carton (pcs)
STF-C64A	With	66.5	15	210
STF-C64B	Without	60.0		

Material	Finish
304 Stainless Steel	Polished

CORNER FASTENER HINGE (W/LOCK)




STH-C64



- Compresses cover to achieve better sealing.
 - Works with STF-C64 fastener.
 - To be used with rubber gasket.
 - Designed to allow front operation.
 - Locks when fastened to prevent accidental release.
 - Pull lever and lift latch to open.
- Door size: W300 x H400/pair
Door thickness: t = 24mm ~ 28mm
Door weight: Max. 2.8 kg (6.1 lbs)/pair

*****DISCONTINUED**

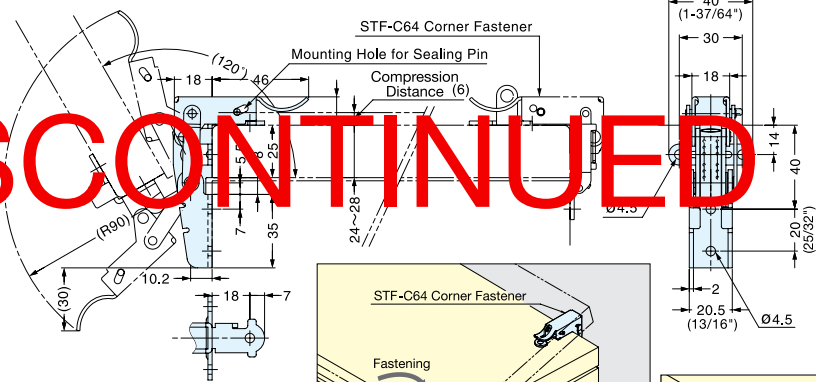

Item No.	Weight (g)	Box (pcs)	Carton (pcs)
STH-C64	90	10	140

Material	Finish
304 Stainless Steel	Polished