

Zwei L STAINLESS STEEL LEVER BOLT

SUS316



ZL-2402

CATCHES & LATCHES



Features

- A thumbturn lever bolt with an indicator for use on glass and wooden doors.
- Made from stainless steel (SUS316) for superior corrosion resistance.
- Uses our Zwei L finish which is created by using advanced polishing technology. It combines a high quality satin finish with a lustrous rich mirrored polish.
- Internal mechanism uses a lever to draw the door to the frame when locking.
- Comes with a trigger (safety feature) so that the lock cannot engage when the door is not closed.

Parts Included


- Size M4 countersunk hex socket bolt (for door mounting)
- Size M3 countersunk hex socket bolt (for cover mounting)
- *The required screws differ depending on the door thickness. See the Types of Screws Included table for details.

Sold Separately

- Strike box ZL-2402-B
- Strike plate ZL-2402-FB



The indicator colour enables easy visibility, allowing you to see clearly whether the door is locked or unlocked.

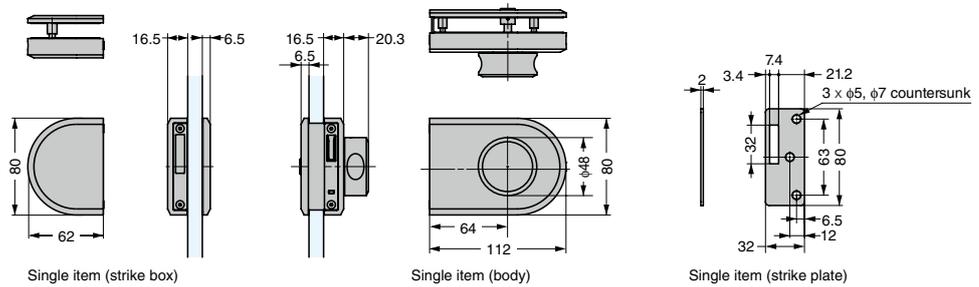


Single item (strike box)

Single item (body)


Single item (strike plate)

Cut Out Dimensions: When using strike box

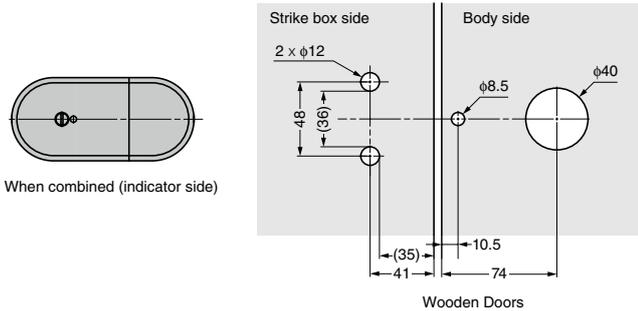


When combined (indicator side)

Wooden Doors

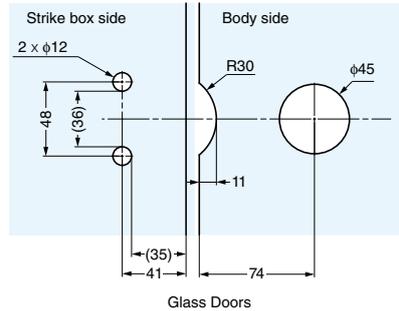


Glass Doors

Application Example with Wooden Door and Strike Plate




Emergency Unlocking Method

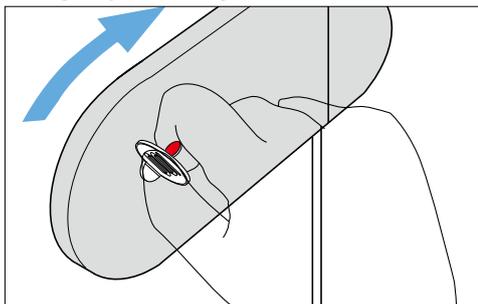


The indicator has a feature which enables unlocking the door from outside in an emergency. To unlock, rotate the centre 90° with a coin, etc. as shown in the figure above.

With Safety Feature



The trigger senses whether the door is open or closed, and only enables the thumbturn to be turned all the way when the door is closed.

Flat when Door is Open



When the door is open, the lever and trigger lie flat and do not protrude.

Types of Screws Included

Quantity	For Glass Door		For Wooden Door	
	Thickness 10 - 12	Thickness 33 - 37	Thickness 38 - 42	Thickness 43 - 45
Countersunk Hex Socket Bolt (for door mounting)	3	M4 × 20	M4 × 45	M4 × 50
Countersunk Hex Socket Bolt (for cover mounting)	1	M3 × 10		
	2	M3 × 8		

Main Body

CAD	Item Code	Item Name	Specifications	Board Thickness (mm)	Material	Finish	Box (sets)
	140-050-402	ZL-2402-G	For Glass Door	10 - 12	Stainless Steel (SUS316)	Zwei L Finish	1
	140-040-967	ZL-2402-W	For Wooden Door	33 - 45			1

Strike Box (sold separately)

CAD	Item Code	Item Name	Specifications	Material	Finish	Box (sets)
	140-040-968	ZL-2402-B	For Glass or Wooden Door	Stainless Steel (SUS316)	Zwei L Finish	1

Strike Plate (sold separately)

CAD	Item Code	Item Name	Specifications	Material	Finish
	140-040-975	ZL-2402-FB	For Wooden Door	Stainless Steel (SUS316)	Zwei L Finish

STAINLESS STEEL LEVER BOLT