

SWIVEL TORQUE HINGE



HG-S





- Rotation angle: 360°
- Free stop function.

Use for:

- Industrial control panels and monitors.

Note:

- Initial torque may vary $\pm 20\%$.
- Do not lubricate.
- For indoor use only.

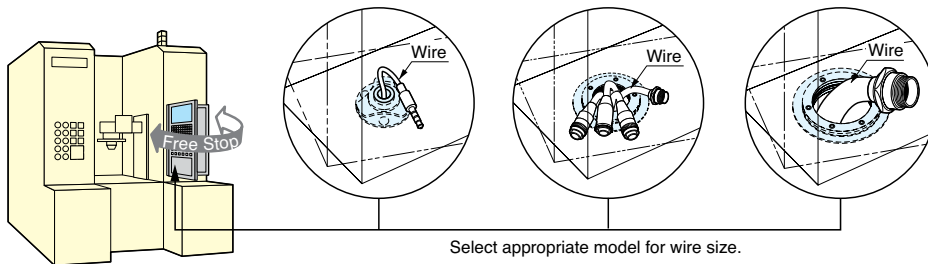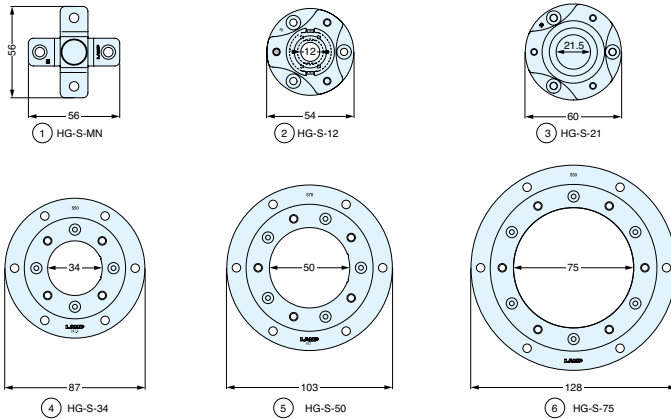

Item No.	No.	Outer Dimension (mm)	Center Hole Diameter (mm)	Torque per piece (kgf·cm)
HG-S7-MN	①	56 (2-13/64")	-	7.1 \pm 20% (6.2 lbs-in)
HG-S20-MN				20.4 \pm 20% (17.7 lbs-in)
HG-S30-12	②	54 (2-1/8")	12.0 (15/32")	30.6 \pm 20% (26.6 lbs-in)
HG-S50-12				51.0 \pm 20% (44.3 lbs-in)
HG-S30-21	③	60 (2-23/64")	21.5 (27/32")	30.6 \pm 20% (26.6 lbs-in)
HG-S50-21				51.0 \pm 20% (44.3 lbs-in)
HG-S50-34	④	87 (3-27/64")	34.0 (1-11/32")	51.0 \pm 20% (44.3 lbs-in)
HG-S70-34				71.4 \pm 20% (62.1 lbs-in)
HG-S70-50	⑤	103 (4-1/16")	50.0 (1-31/32")	71.4 \pm 20% (62.1 lbs-in)
HG-S100-50				102.0 \pm 20% (88.7 lbs-in)
HG-S50-75	⑥	128 (5-3/64")	75.0 (2-61/64")	51.0 \pm 20% (44.3 lbs-in)
HG-S70-75				71.4 \pm 20% (62.1 lbs-in)