


STAINLESS STEEL TORQUE HINGE




SFTH




- Hinge with friction torque holds lid/door in desired position.
- Stainless steel construction for corrosive environments.
- Operating temperature: -20°C~60°C (-4°F~140°F)

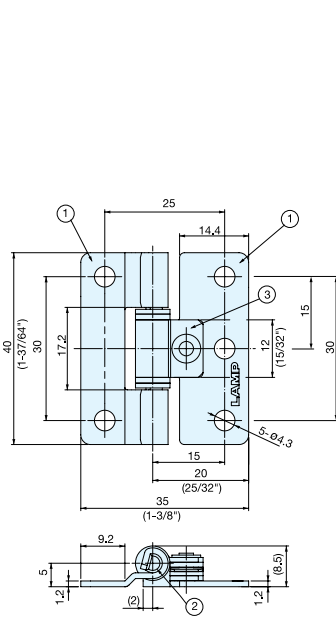


SFTH-02

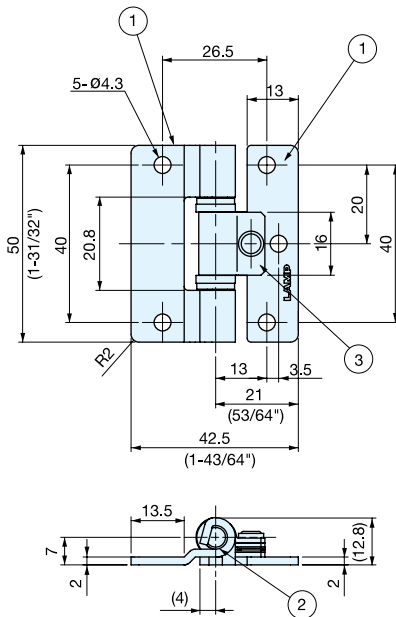

SFTH-03

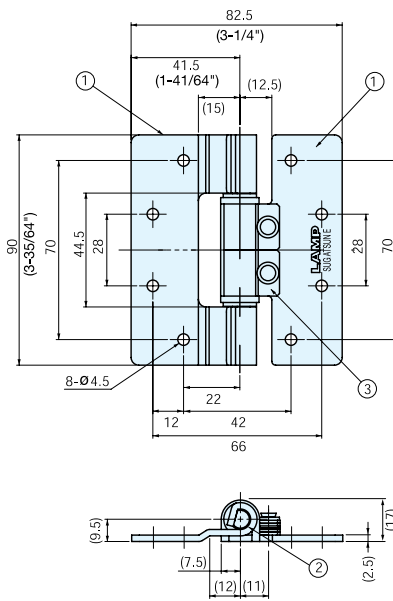

SFTH-05

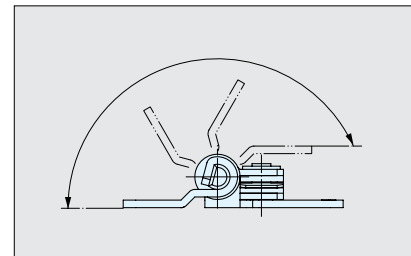

Applicable torque range

Item No.	Torque per piece (kgf·cm)	Weight (g)	Box (pcs)	Carton (pcs)
SFTH-02-5	5 (4.3 lbs·in) ±1kgf·cm	21	50	500
SFTH-03-9	9 (7.8 lbs·in) ±2kgf·cm	51	30	300
SFTH-03-19	19 (16.5 lbs·in) ±2kgf·cm			
SFTH-05-35	35 (30.4 lbs·in) ±5kgf·cm	195	10	100
SFTH-05-58	58 (50.3 lbs·in) ±5kgf·cm			

No.	Part Name	Material	Finish
①	Body A	304 Stainless Steel	Polished
②	Shaft	303 Stainless Steel	
③	Body B	301 Stainless Steel	