


TORQUE HINGE HG-TA

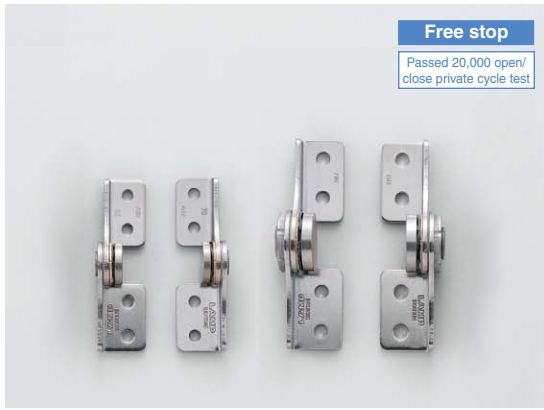

● Highly durable HG-TA45H with wire hole is newly launched 1

[Specifications]

● Operating temperature: 0°C ~40°C

[Applications]

● LCD, monitoring camera, etc.

[Remarks]

- Be sure to read the "Cautions" 2
- For pair using: Please use the same torque in both hinges.


● When installing, ensure that both hinge shafts are levelled and aligned.

Selection Tool
Sasuga-kun
 Applicable Products
 Used for Product Selection & Simulation.
 Available on Web!



Video Link






[Application Example]




Marking:
 HG-TA20...[20]
 HG-TA30...[30]

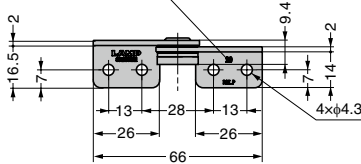

HG-TA20L, HG-TA30L

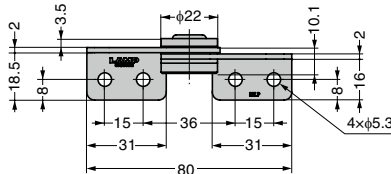

HG-TA45L



No.	Part Name	Material	Finish
①	Bracket	Stainless Steel (SUS430)	Barrel Polished
②	Base		
③	F Plate	Bronze	-
④	Spring Washer	Steel	
⑤	Shaft	Stainless Steel (SUS303)	
⑥	Washer	Stainless Steel (SUS430)	Barrel Polished

RHS	CAD	Item Code	Item Name	Description	Type	Torque N·m/pc	Torque kgf·cm/pc	Weight (g)	Box (pcs)	Carton (pcs)	
G	3D	170-012-403	HG-TA20R	Without wire hole	Right-handed	2.0±20%	20.4±20%	30	40	320	
G	3D	170-012-404	HG-TA20L		Left-handed						
G	3D	170-012-405	HG-TA30R		Right-handed	3.0±20%	30.6±20%		40	320	
G	3D	170-012-406	HG-TA30L		Left-handed						
G	3D	170-012-407	HG-TA45R		Right-handed	4.5±20%	45.9±20%		65	20	160
G	3D	170-012-408	HG-TA45L		Left-handed						

Refer to 1 : P.38, 2 : P.15