



Jacking Units JBG Series

Load rating 600kg

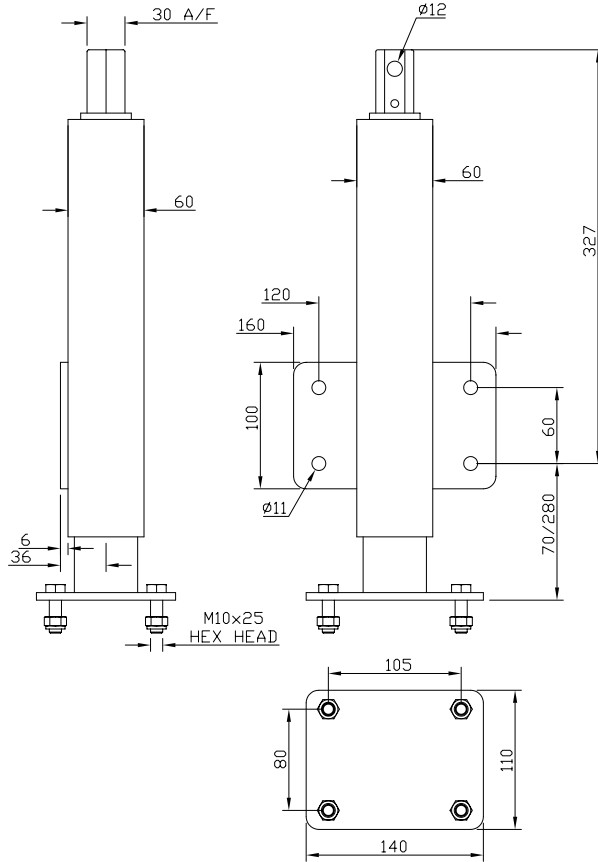

Brauer has designed and developed a range of four jacking units, which now cover the full loading spectrum for jacking unit use, where lifting by raising a trailer, flat bed or trolley bed on castors or without castors (flat footed) to align with a docking area, is required. The family consist of the lighter loaded JBG series which has a capacity of 600Kg right up to the heavy duty JWG series with loading capacities of 2500Kg per jacking unit. Quality, design and availability are enhanced, as all four of the Brauer jacking units are made at our Milton Keynes facility. The JBG has been designed to suit our HA castor range which has wheel options, from 125mm to 200mm diameter and uses an aluminium centred wheel with a polyurethane tyre. The JBG jacking unit is offered generally, but not exclusively, with the swivel castor option. Other wheel and castor types can be fitted to all models of the Brauer jacking units, should this be a consideration please contact Brauer sales.

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
125	135 x 110	105 x 80	10
150	135 x 110	105 x 80	10
200	135 x 110	105 x 80	10

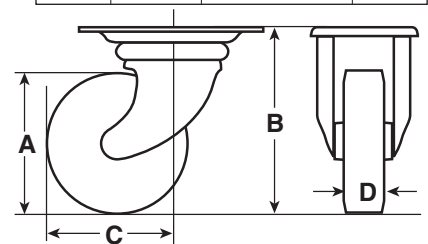

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A	B	C	D			Swivel	
Wheel Diameter	Overall Height	Swivel Radius	Tread Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg
ALUMINIUM CENTRED WHEEL WITH POLYURETHANE TYRE							
125	156	118	50	350	Ball Journal	JBG/HA125/50BJ	8
150	196	130	50	400	Ball Journal	JBG/HA150/50BJ	9
200	240	155	50	500	Ball Journal	JBG/HA200/50BJ	10
JACKING UNIT ONLY						JU600	6

600KG JACKING UNIT