


# CORNER CONNECTOR PJ One-touch Connector For Double-groove

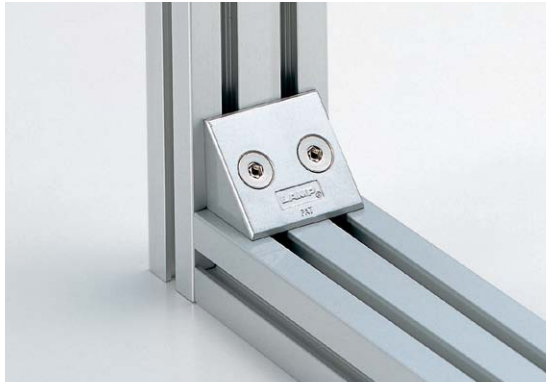


- Used for easily installing double-groove aluminium frames to each other.
- Easy connection of aluminium frames with 2 screws.
- Unique installation system shortens working time.
- Widely applied to various aluminium frames.
- Clean appearance.
- Groove pitch and width can be made to order.


### [Remarks]

- Aluminium frames to be connected should be of the same size and shape.
- Applicable frame size is for reference. Please check with actual item.
- This type cannot be post-installed. It is necessary to insert the inner connector into the aluminium frame to be connected in advance.
- Recommended tightening torque varies depending on installation conditions. Determine torque value by test before use.


### [Parts]




### [Applicable Frame Reference Dimensions]

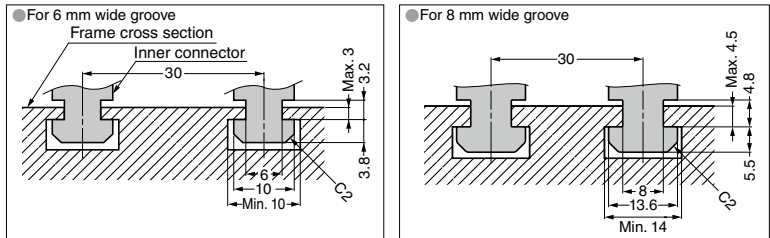

### [Installation]

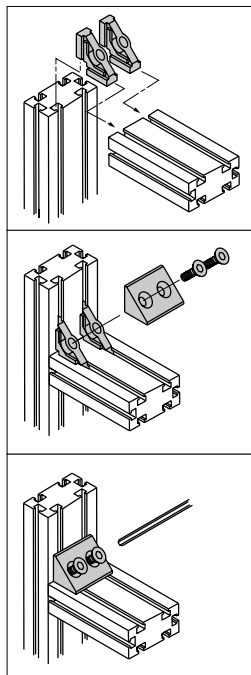

1. Insert the AS nut into the groove of the aluminium frame.
2. Put the connector cover on the inner connector.
3. Tighten with the supplied mounting screws.

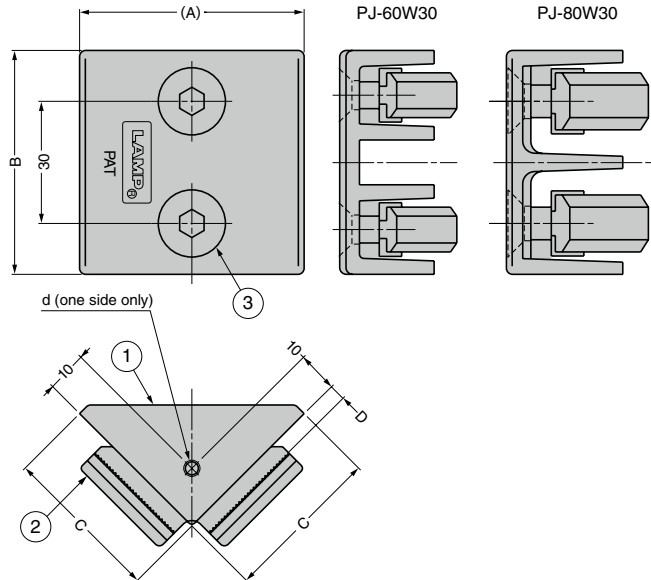

No.	Part Name	Material	Finish
①	Connector Cover	Aluminium Alloy (ADC)	Silver Enamel Finish
②	Inner Connector	Zinc Alloy (ZDC)	Coloured Zinc Chromate
③	Hexagon Socket Countersunk Head Screw	Steel	Nickel

RoHS	CAD	Item Code	Item Name	d	Groove width	A	B	C	D	③Size	Recommended Tightening Torque N·m	Recommended Tightening Torque kgf·cm	Weight (g)	Box (pcs)	Carton (pcs)
CE	SD	120-040-488	PJ-60W30	w/o	For 6 mm	41	50	29	1~3	M6×15	6	61.2	79	20	240
CE	SD	120-040-556	PJ-60W30T	M4									80	20	240
CE	SD	120-040-552	PJ-80W30	w/o	For 8 mm	55	55	39	1.5~4.5	M8×20	13	133	190	10	120
CE	SD	120-040-553	PJ-80W30T	M4									189	10	120