


ULTRA HEAVY DUTY LEVELLING GLIDE SDY-TRAS With Swivel Function

LOAD CAPACITY 63700~107800 N **SUS**

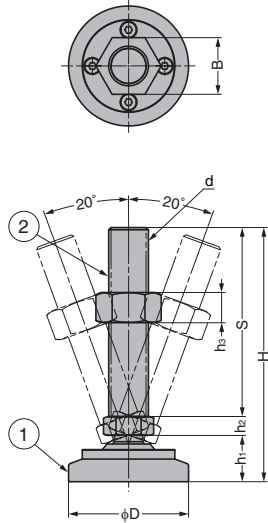

- Levelling glide subject to galling preventive treatment.
- Swivels approximately 40° to compensate for uneven floors. Also, load is distributed evenly for excellent durability.
- Threaded bolt with trapezoidal screw thread. Tr42-Tr60 available.
- Steel models also available by made to order (minimum order 10 pcs).

SPECIAL LEVELLING GLIDE

HEAVY DUTY LEVELLING GLIDES

MEDIUM-SIZED LEVELLING GLIDES

SMALL LEVELLING GLIDES

BASE FOR LEVELLING GLIDES

CASE FEET

BASE

30° Trapezoidal screw thread

	P	d ₁	d ₂	h
Tr42	6	34.3	41.8	3.75
Tr52	7	43.1	51.8	4.35
Tr60	8	49.9	59.8	4.95

d₁ : Minimum diameter
d₂ : Maximum diameter
h : Thread height


[Remarks]

- Use in combination with the base (sold separately).

[Sold Separately]

- Glide base SDY-L

[Application Example]





No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Polished
②	Threaded Bolt		

R/H/S	CAD	Item Code	Item Name	d	D	H	h ₁	h ₂	h ₃	S	B	Load Capacity N/pc	Load Capacity kgf/pc	Weight (kg)	Box (pcs)	Carton (pcs)
G	SD	200-034-532	SDY-TRAS-42-200	Tr42	127	269	49	20	32	200	60	63700	6500	6.22	1	-
		200-034-533	SDY-TRAS-42-300											369	7.04	1
G	SD	200-034-534	SDY-TRAS-52-200	Tr52	137	227	55	22	42	200	80	88200	9000	9.14	1	-
		200-034-535	SDY-TRAS-52-300											377	10.48	1
G	SD	200-034-536	SDY-TRAS-60-200	Tr60	147	291	67	24	48	200	90	107800	11000	12.50	1	-
		200-034-537	SDY-TRAS-60-300											391	14.28	1

Refer to 1 : P.806

LONG BOLT LEVELLING GLIDE LB

LOAD CAPACITY 14700~39200 N

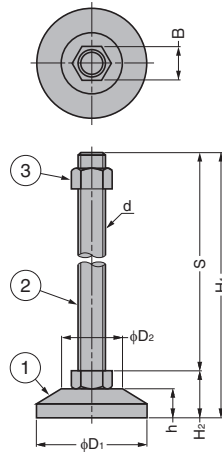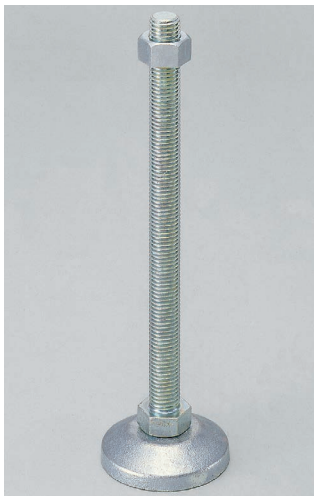


- Cross-recessed bottom allows easy installation with pneumatic screwdriver.
- Made-to-order specifications and stainless steel types also available.

[Applications]

- Machine tools, vending machines, etc.

[Application Example]

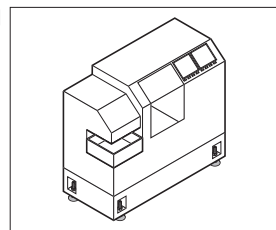

No.	Part Name	Material	Finish
①	Body	Steel (FC)	Coloured Zinc Chromate (Trivalent)
②	Threaded Bolt	Steel (SS)	
③	Hex Nut		

R/H/S	CAD	Item Code	Item Name	D ₁	D ₂	H ₁	H ₂	h	S	B	d	Load Capacity N/pc	Load Capacity kgf/pc	Weight (kg)	Box (pcs)	Carton (pcs)
G	SD	200-140-740	LB12-200	60	40	225	25	17	200	19	M12	14700	1500	660	30	-
		200-140-234	LB16-250													
G	SD	200-140-235	LB16-300	80	45	332	32	300	M16	24	350	19600	2000	880	25	-
		200-140-741	☆LB16-350													
G	SD	200-140-742	LB20-250	80	45	285	35	22	250	30	M20	39200	4000	1140	20	-
		200-140-233	LB20-300													
G	SD	200-140-743	☆LB20-350	80	45	385	35	400	280	36	M24	14700	1500	1240	20	-
		200-140-744	☆LB20-400													
G	SD	200-140-232	LB24-280	80	45	317	37	280	36	M24	1520	20	-			

☆ Limited stock available. Please contact your vender.