

STAINLESS STEEL DRAW LATCH STF40

LOAD CAPACITY 300 N

TEST METHOD 8



SUS



- Ideal for industrial equipment, vehicle equipment and leisure equipment, etc.

[Recommended Screws]

- M3 pan head screw

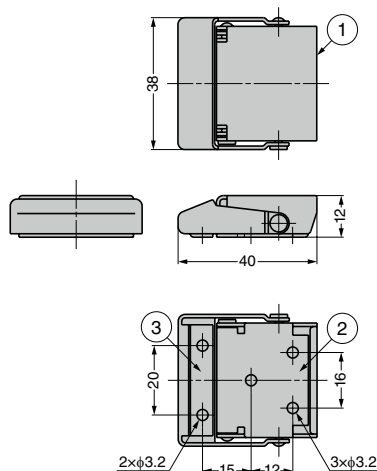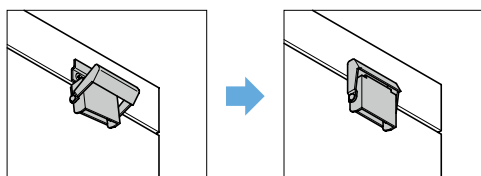

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Mounting Plate		
③	Strike		

RoHS	CAD	Item Code	Item Name	Clamping Force N	Clamping Force kgf	Load Capacity N	Load Capacity kgf	Weight (g)	Box (pcs)	Carton (pcs)
CE	3D	120-044-025	STF40	49	5	300	30.6	30	30	300

DRAW LATCH 9341 Clamping Margin Adjustable

LOAD CAPACITY 1000, 1500 N

TEST METHOD 7

TEST METHOD 17

SUS316



- Clean appearance.
- Concealed mounting screws prevent mischief.
- Can be used with padlock 1.
- Clamping margin is adjustable.


[Applications]

- Ships, etc.


[Recommended Screws]

- 934151, 934152: M4 countersunk head screw (for body), M4 truss head screw (for strike)
- 934161, 934162: M5 countersunk head screw

[Adjustment]



[Application Example]

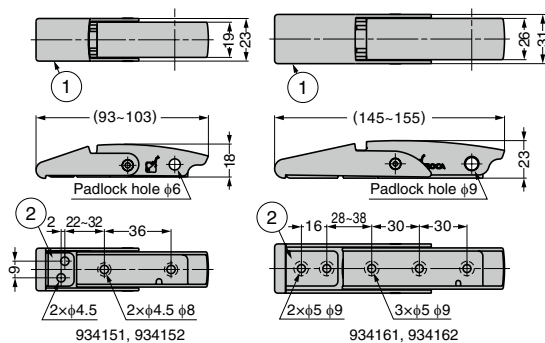

No.	Part Name	Material	Finish
①	Body	Stainless Steel	Polished, Satin
②	Strike	(SUS316)	Barrel Polished

RoHS	CAD	Item Code	Item Name	Finish	Load Capacity N	Load Capacity kgf	Weight (g)	Box (pcs)	Carton (pcs)
CE	3D	120-025-088	934151	Polished	1000	102	83	200	—
CE	3D	120-025-089	934152	Satin				200	—
CE	3D	120-025-090	934161	Polished	1500	153	208	50	—
CE	3D	120-025-091	934162	Satin				50	—

Refer to 1 : P.748