

**PANEL CATCH AUH-C70 For Panel Hanger "AUH"**




- Holds panels hung with the AUH in place.  
This catching function prevents panels from moving or falling even when bumped.
- Specially designed for use with the AUH panel hanger.
- The correct mounting position can be found by simply aligning with the AUH.

**[Remarks]**



- Please make sure that the panel is not subject to a pulling force when using the AUH-C70 without the AUH.
- Recommended quantity per panel: two
- The retaining force may vary. Please confirm with actual products before use.

**[Recommended Screw]**

- Cross-recessed countersunk head tapping screw 4

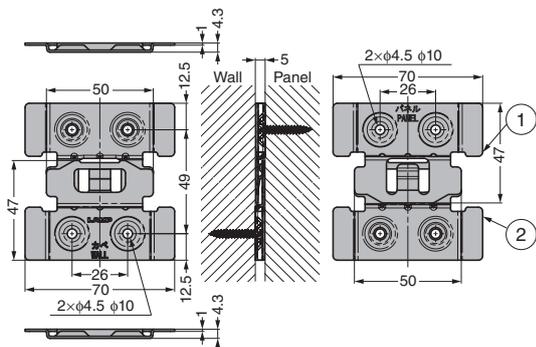

**[Drawing]** when using two AUH-C70 and AUH

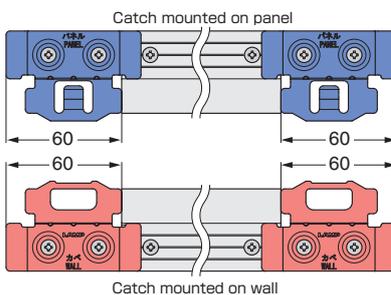

| No. | Part Name              | Material                 | Finish/Colour   |
|-----|------------------------|--------------------------|-----------------|
| ①   | Catch mounted on panel | Stainless Steel (SUS304) | Barrel Polished |
| ②   | Catch mounted on wall  |                          |                 |

| RoHS | CAD | Item Code   | Item Name | Retaining Force N | Retaining Force kgf | Load Capacity N* | Load Capacity kgf* | Weight (g) |
|------|-----|-------------|-----------|-------------------|---------------------|------------------|--------------------|------------|
|      |     | 110-044-905 | AUH-C70   | 50                | 5.1                 | 100              | 10.2               | 41         |

\* The load capacity is a value when using the AUH-C70 alone. When using with the AUH, please see the load capacity of the AUH.

**PANEL HANGER AUH**



- Panel can be easily attached/detached without tools.
- Distance to wall is only 5 mm.
- Continuous panels can also be installed easily.
- Can prevent warping of large size panels.
- Mounting holes can be set in the groove of screw guide (see drawing).

**[Applications]**

- Exhibition panels, paintings, furniture.

**[Remarks]**

- Be sure to install panel to wall made from strong materials.
- Actual load capacity varies depending on use conditions.


The load capacity in the catalog is based on the conditions below.

- Numbers of AUH: 2 pcs
- Length : 700mm
- Distance between 2 AUH : 780mm
- Panel Height : 900mm
- Panel Length : 700mm
- Panel Thickness : 25mm


**[Recommended Screws]**

- Countersunk head tapping screw 4


**[Panel Installation]**

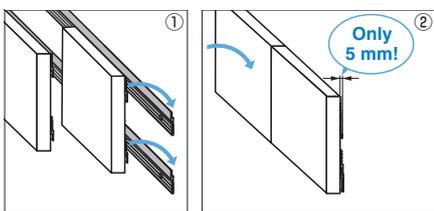

**[Example]**

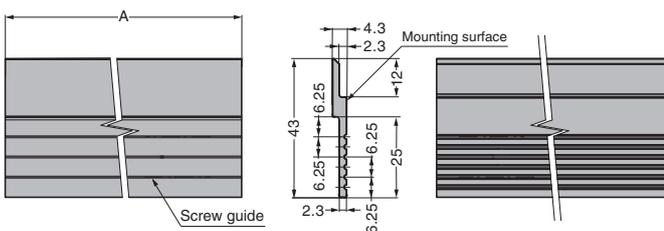


**[Cut Out Dimensions]**

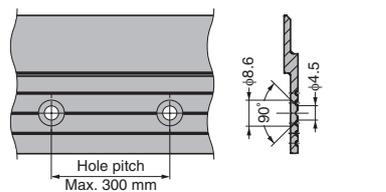

Mounting holes should be located symmetrically to the centre of mounting surface, with the pitch below 300mm.

**[Installation]**



| RoHS | CAD | Item Code   | Item Name | A    | Material        | Finish          | Load Capacity N | Load Capacity kgf | Weight (g) | Carton (pcs) |
|------|-----|-------------|-----------|------|-----------------|-----------------|-----------------|-------------------|------------|--------------|
|      |     | 110-021-888 | AUH-900   | 900  | Aluminium Alloy | Anodised Silver | 294.2           | 30                | 35         | 10           |
|      |     | 110-023-958 | AUH-2700  | 2700 |                 |                 |                 |                   | 700        | 10           |