
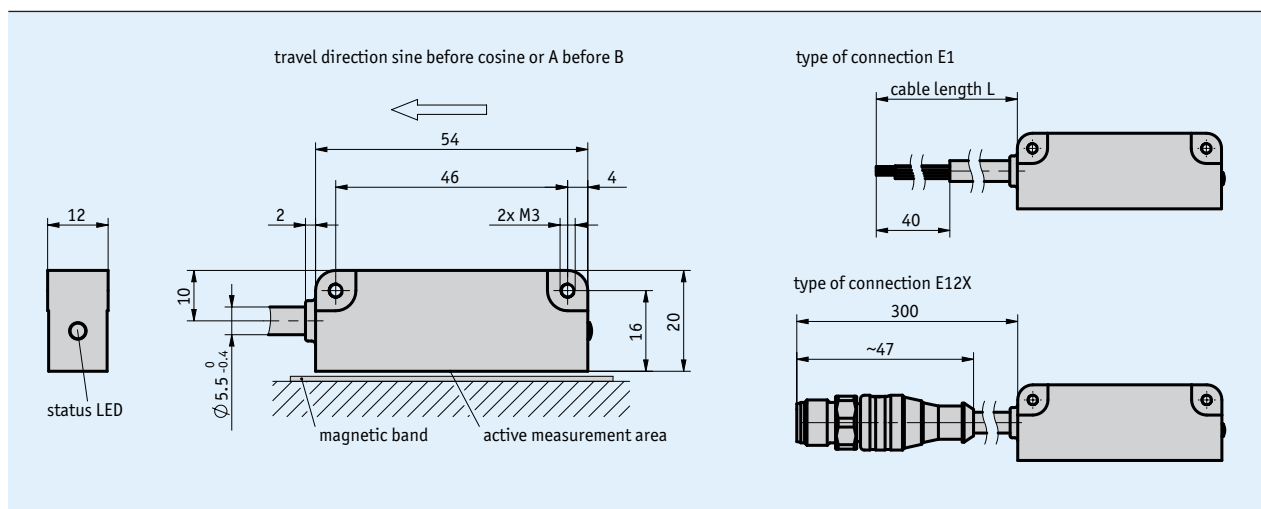


Profile

- High absolute resolution 1 μm
- Repeat accuracy max. $\pm 1 \mu\text{m}$
- Reading distance $\leq 0.8 \text{ mm}$
- Measuring range 0 ... 16 m
- Function and status display LED
- Interface BiSS C, SSI, IO-Link
- Optionally analog Sin/Cos 1 Vss or digital line driver

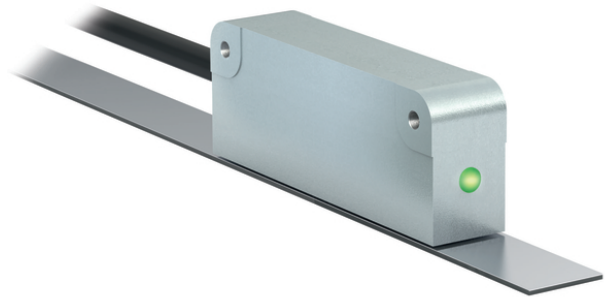


Mechanical data

Feature	Technical data	Additional information
Housing	zinc die-cast	
Sensor/band reading distance	$\leq 0.8 \text{ mm}$	Lateral offset $\pm 0.6 \text{ mm}$
Cable length	1 ... 20 m	(connection type E1)
Cable sheath	PUR, suitable for drag-chain use	10-core $\varnothing 5.5_{-0.4} \text{ mm}$ (E1, twisted in pairs)
Cable bending radius	10 mm	static
	50 mm	dynamic
Service life of cable	5 million cycles	under the following test conditions: Travel distance 4.5 m Travel speed 3 m/s Acceleration 5 m/s ² Ambient temperature 20° C $\pm$ 5° C
Weight	~0.05 kg	

Electrical data


Feature	Technical data	Additional information
Operating voltage	4.5 ... 30 V DC	reverse polarity protected (SSI + BiSS/C)
	7.5 ... 30 V DC	reverse polarity protected (IOL)
Current consumption	<200 mA	
Status display	RGB-LED	plausibility error, distance warning, device status
Output circuit	without, LD, 1Vss	
Interface	SSI, BiSS C, IO Link	
Real-time requirement	speed-proportional signal output	Sin/Cos output
Type of connection	open cable end	(SSI + BiSS/C)
	M12 connector (A-coded)	4-pole, 1x pin (IOL)

Signal pattern, Sin/Cos output

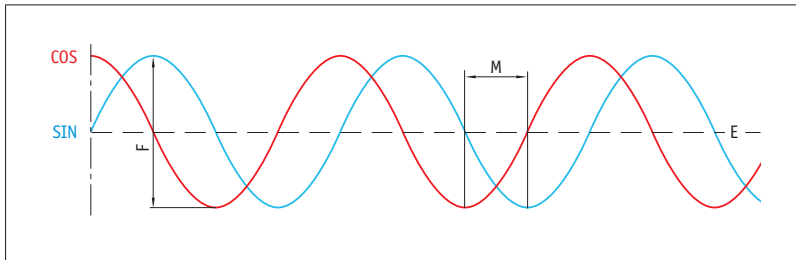


E: reference voltage 2.5 V
F: 1 V_{SS} ±10%
M: 90° ±1.0° / ±3° (25 kHz)

Signal pattern, LD output circuit

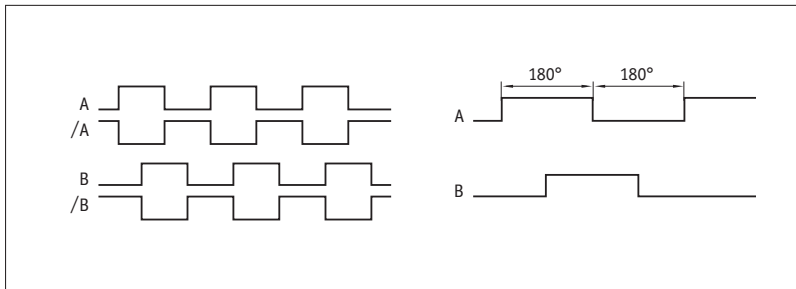

Pulse interval, LD output circuit

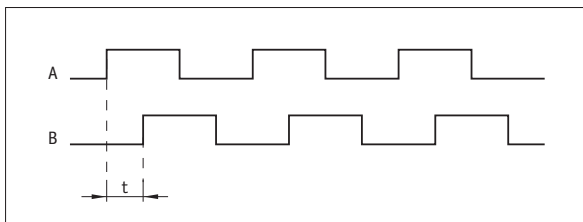

Example: Pulse interval t = 1 μs

(i. e., the downstream unit must be able to process 250 kHz)

$$\text{Formula for counting frequency} = \frac{1}{1 \mu\text{s} \times 4} = 250 \text{ kHz}$$

System data

Feature	Technical data	Additional information
Pole length	2 mm	incremental
Resolution	1 μm	absolute
	1, 5, 10 μm	LD, incremental
	2 mm	period length, 1Vpp
Linearity deviation	±10 μm	
Repeat accuracy	±1 μm	
Measuring range	≤16000 mm	
Travel speed	≤5 m/s	absolute
	≤25 m/s	incremental

Travel speed, LD output circuit

		Travel speed Vmax [m/s]					
Resolution [μm]	1	10.00	5.00	2.00	1.00	0.50	0.20
	5	25.00	25.00	10.00	5.00	2.50	1.00
	10	25.00	25.00	20.00	10.00	5.00	2.00
Pulse interval [μs]		0.10	0.20	0.50	1.00	2.00	5.00
Counting frequency [kHz]		2500.00	1250.00	500.00	250.00	125.00	50.00

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 85 °C	
Storage temperature	-40 ... 85 °C	
Relative humidity	100 %	condensation admissible
EMC	EN 61326-1	industry immunity requirement, class B emission limit
Protection category	IP67	EN 60529
Shock resistance	$\leq 500 \text{ m/s}^2$, 11 ms	EN 60068-2-27, half-sine, 3 axes (+/-), each 3 pulses
Vibration resistance	$\leq 100 \text{ m/s}^2$, 10 ... 2000 Hz	EN 60068-2-6, 3 axes, each 10 cycles

Pin assignment

■ Interface SSI, BiSS C without LD, 1Vss

SSI	BiSS C	Cable color
GND	GND	black
+UB	+UB	brown
nc	nc	red
nc	nc	yellow
nc	nc	orange
nc	nc	green
T+	MA	blue
T-	NMA	violet
D+	SLO	gray
D-	NSLO	white

■ Interface SSI, BiSS C with LD, 1Vss

SSI	BiSS C	Cable color
GND	GND	black
+UB	+UB	brown
A, Sin+	A, Sin+	red
/A, Sin-	/A, Sin-	yellow
B, Cos+	B, Cos+	orange
/B, Cos-	/B, Cos-	green
T+	MA	blue
T-	NMA	violet
D+	SLO	gray
D-	NSLO	white


■ Interface IO-Link

Signal	PIN
L+ (+UB)	1
I/Q	2
L- (GND)	3
C/Q	4

Hint for mounting

When you mount the sensor and magnetic tape, please be careful to align both system components correctly. The arrow marks on the tape and sensor must point in the same direction when mounting the components.

A, Sensor/tape reading distance	$\leq 0.8 \text{ mm}$
B, Lateral offset	$\pm 0.6 \text{ mm}$
C, Alignment error	$\pm 1^\circ$
D, Longitudinal tilt	max. sensor/tape A reading distance must never be exceeded.
E, Lateral tilt	max. sensor/tape A reading distance must never be exceeded.

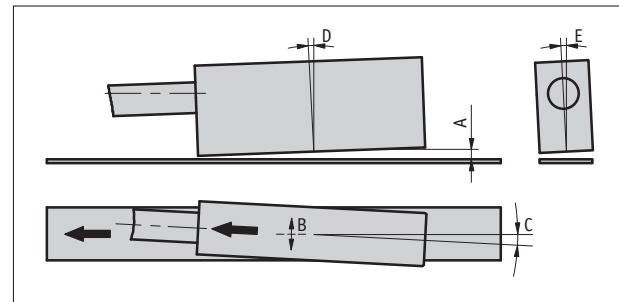

Symbolic representation

Order

■ Ordering information

One or more system components are required:

Magnetic band MBA213

www.siko-global.com

■ Ordering table

Feature	Ordering data	Specification	Additional information
Type of connection	E1	A open cable end	only with SSI, BISS/C
	E12X	plug outlet with cable	only with IO-link
Cable length L	...	B 01.0 ... 20.0 m, in intervals of 1 m	only at E1
	00.3	0.3 m	only at E12X
		others on request	
Interface	BISS/C	C BiSS C	only at E1
	SSI	RS422	only at E1
Output circuit	1Vss	D Sin/Cos	only at E1
	LD	Line Driver (RS422)	only at E1
	0	without	
Incremental resolution	...	E 1, 5, 10 in μm	only with LD
		no information required	
Pulse interval	...	F 0.1, 0.2, 0.5, 1, 2, 5 in μs	only with LD
		no information required	

■ Order key

MSA213C - A - B - C - D - E - F - S

Scope of delivery: MSA213C, Quick Start Guide, distance gage